

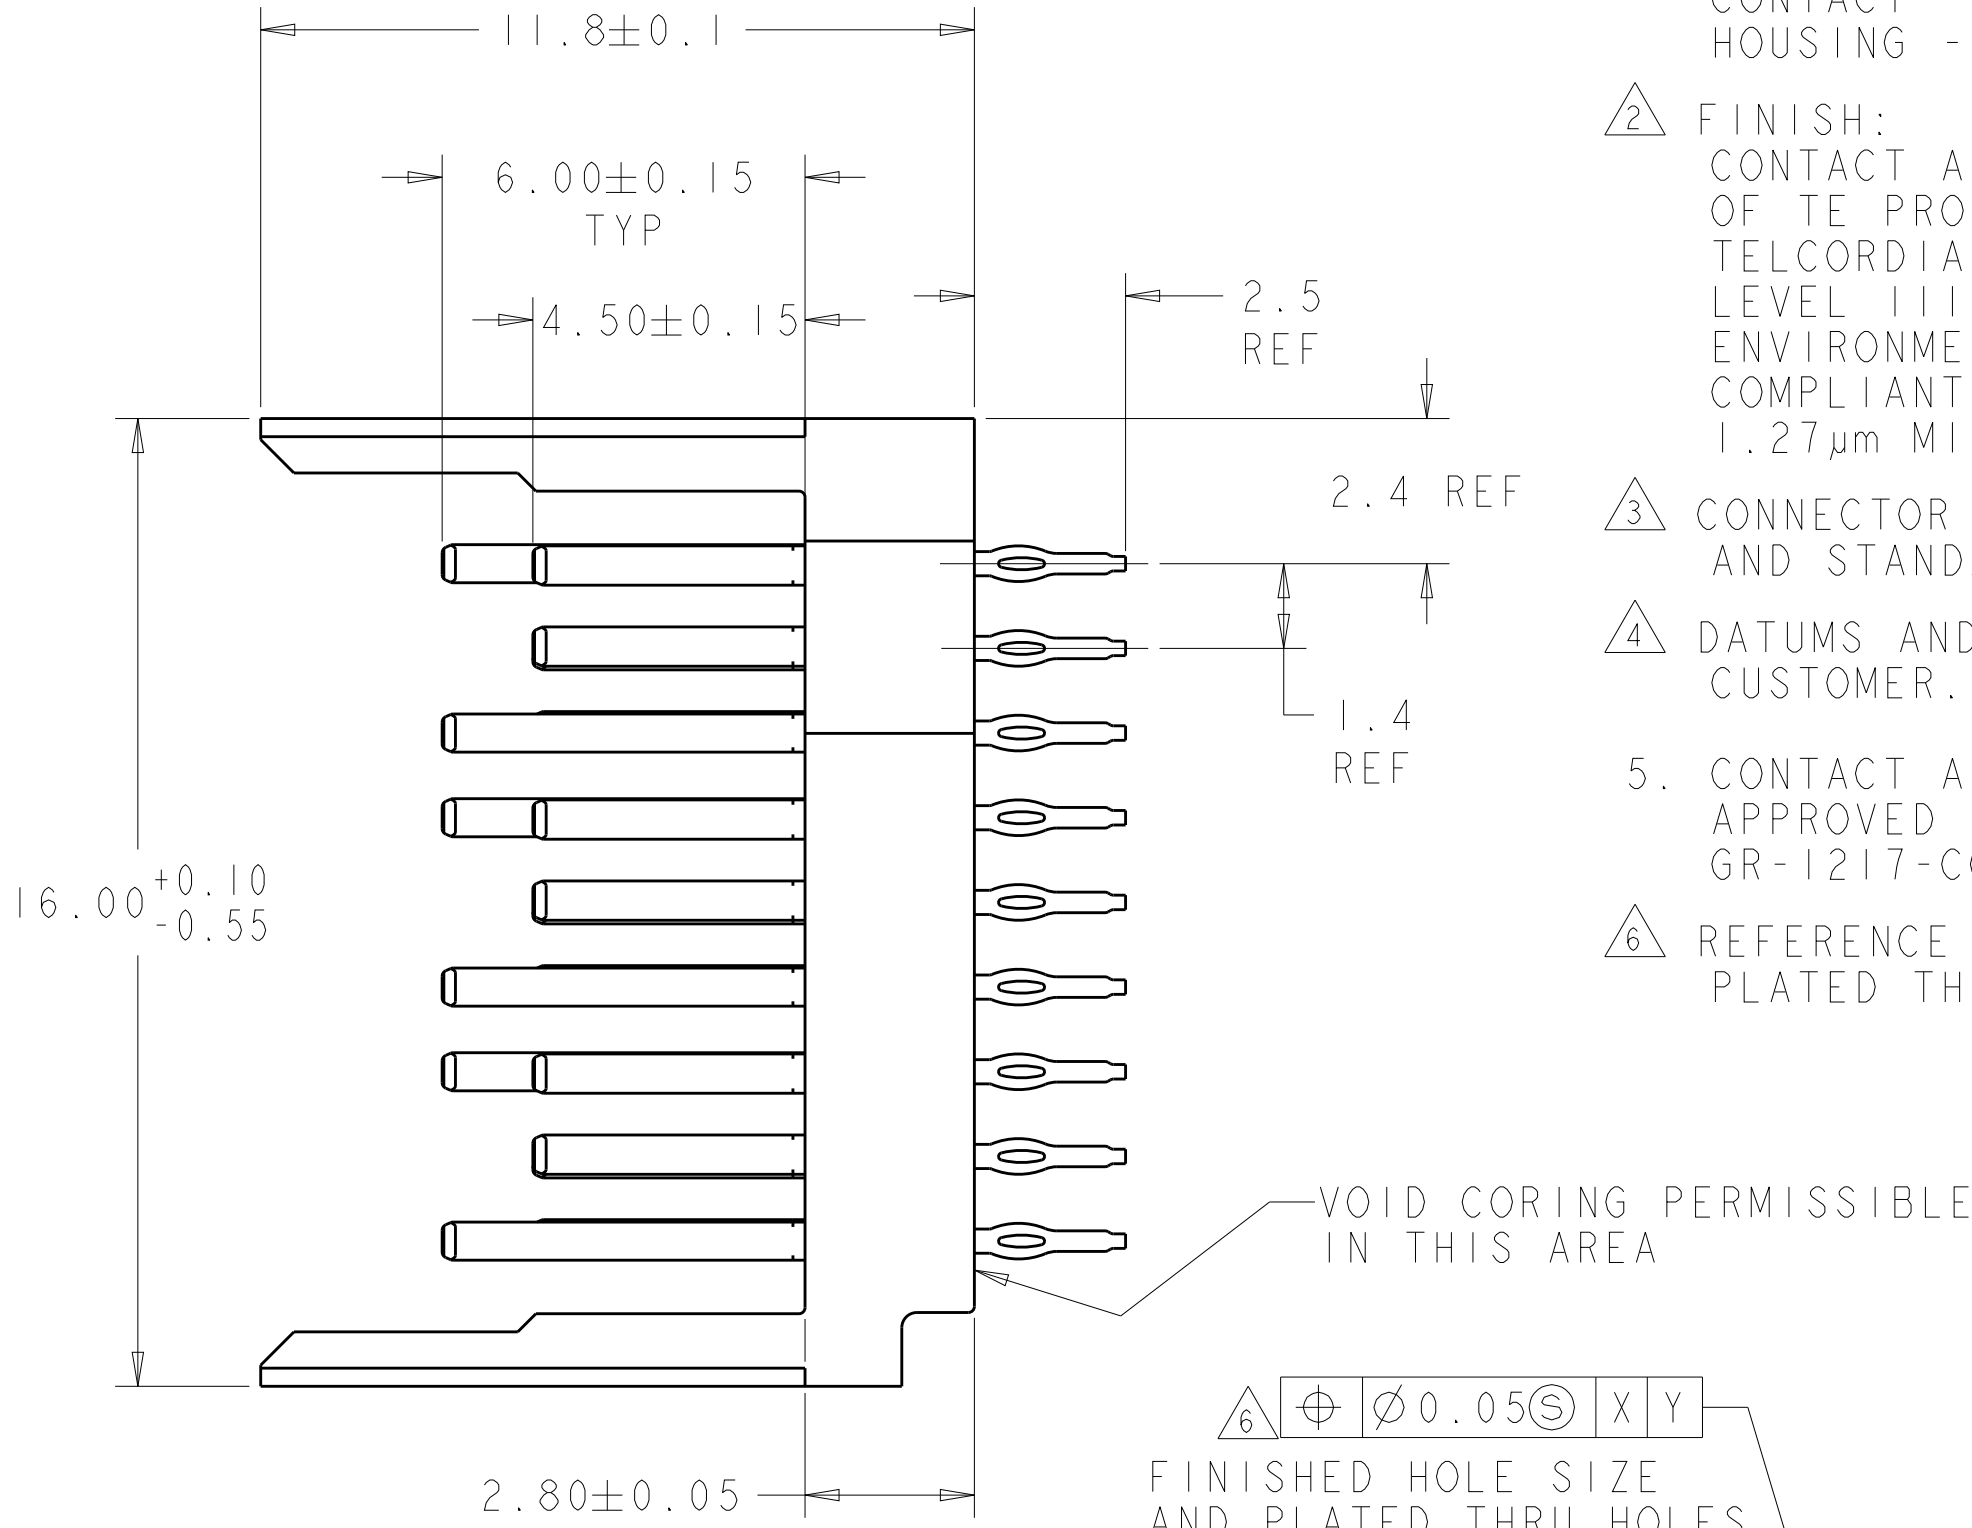
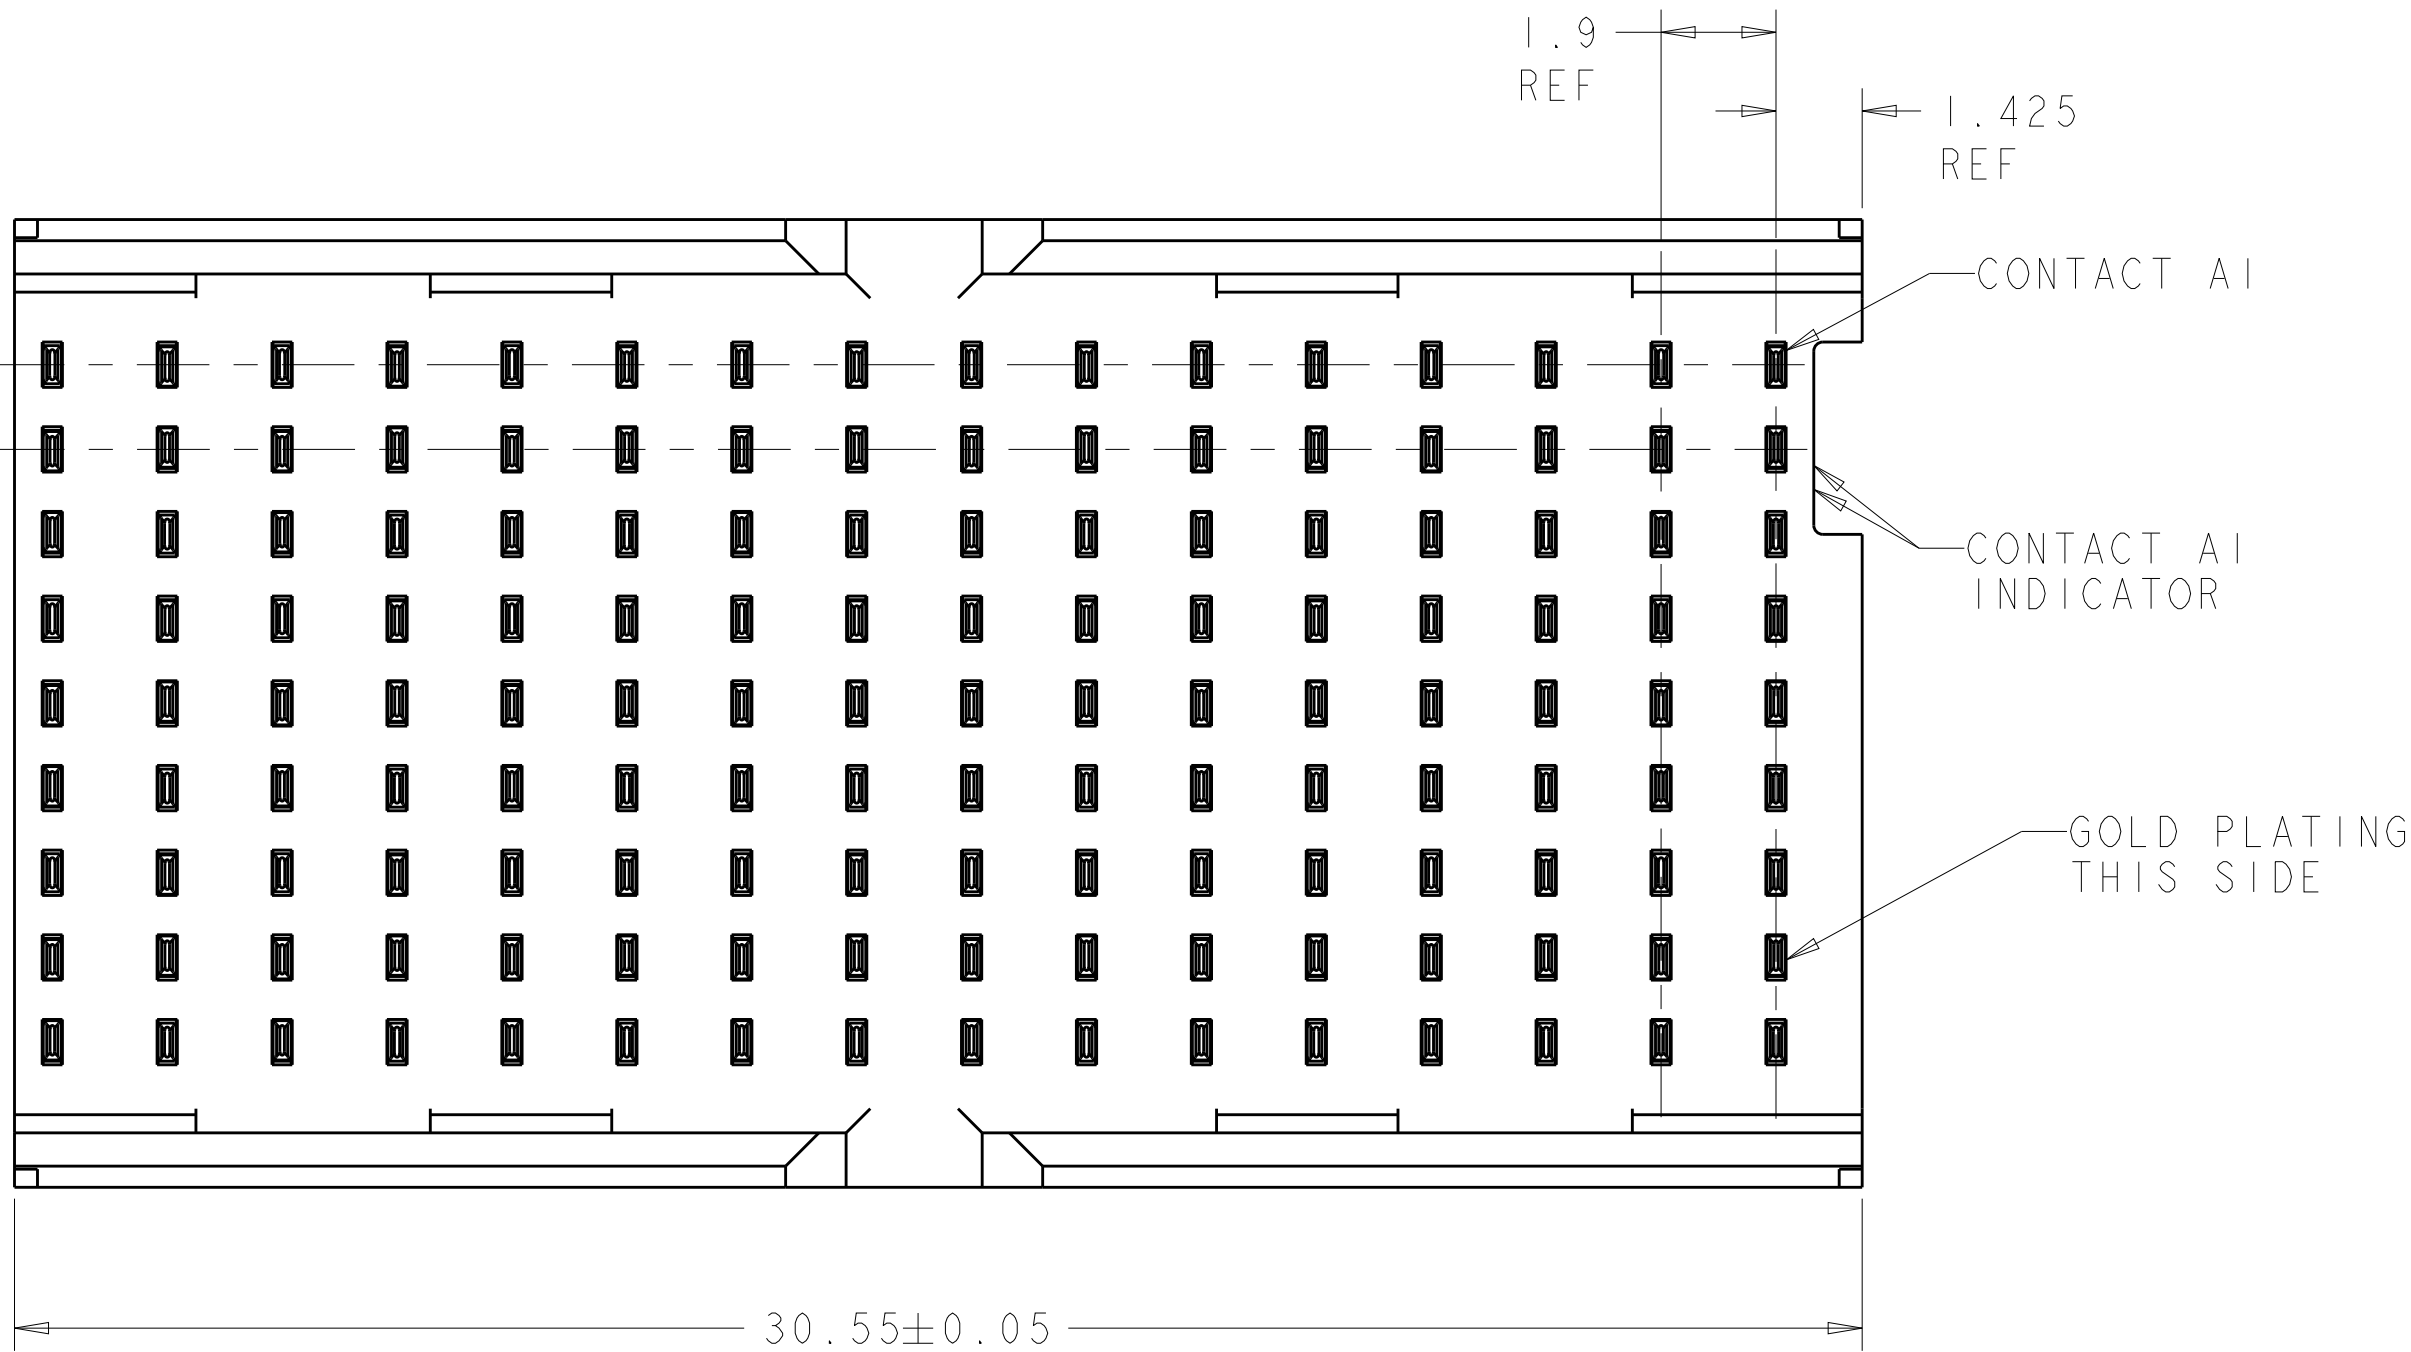


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECO-13-010626	07AUG2013	KH	RP

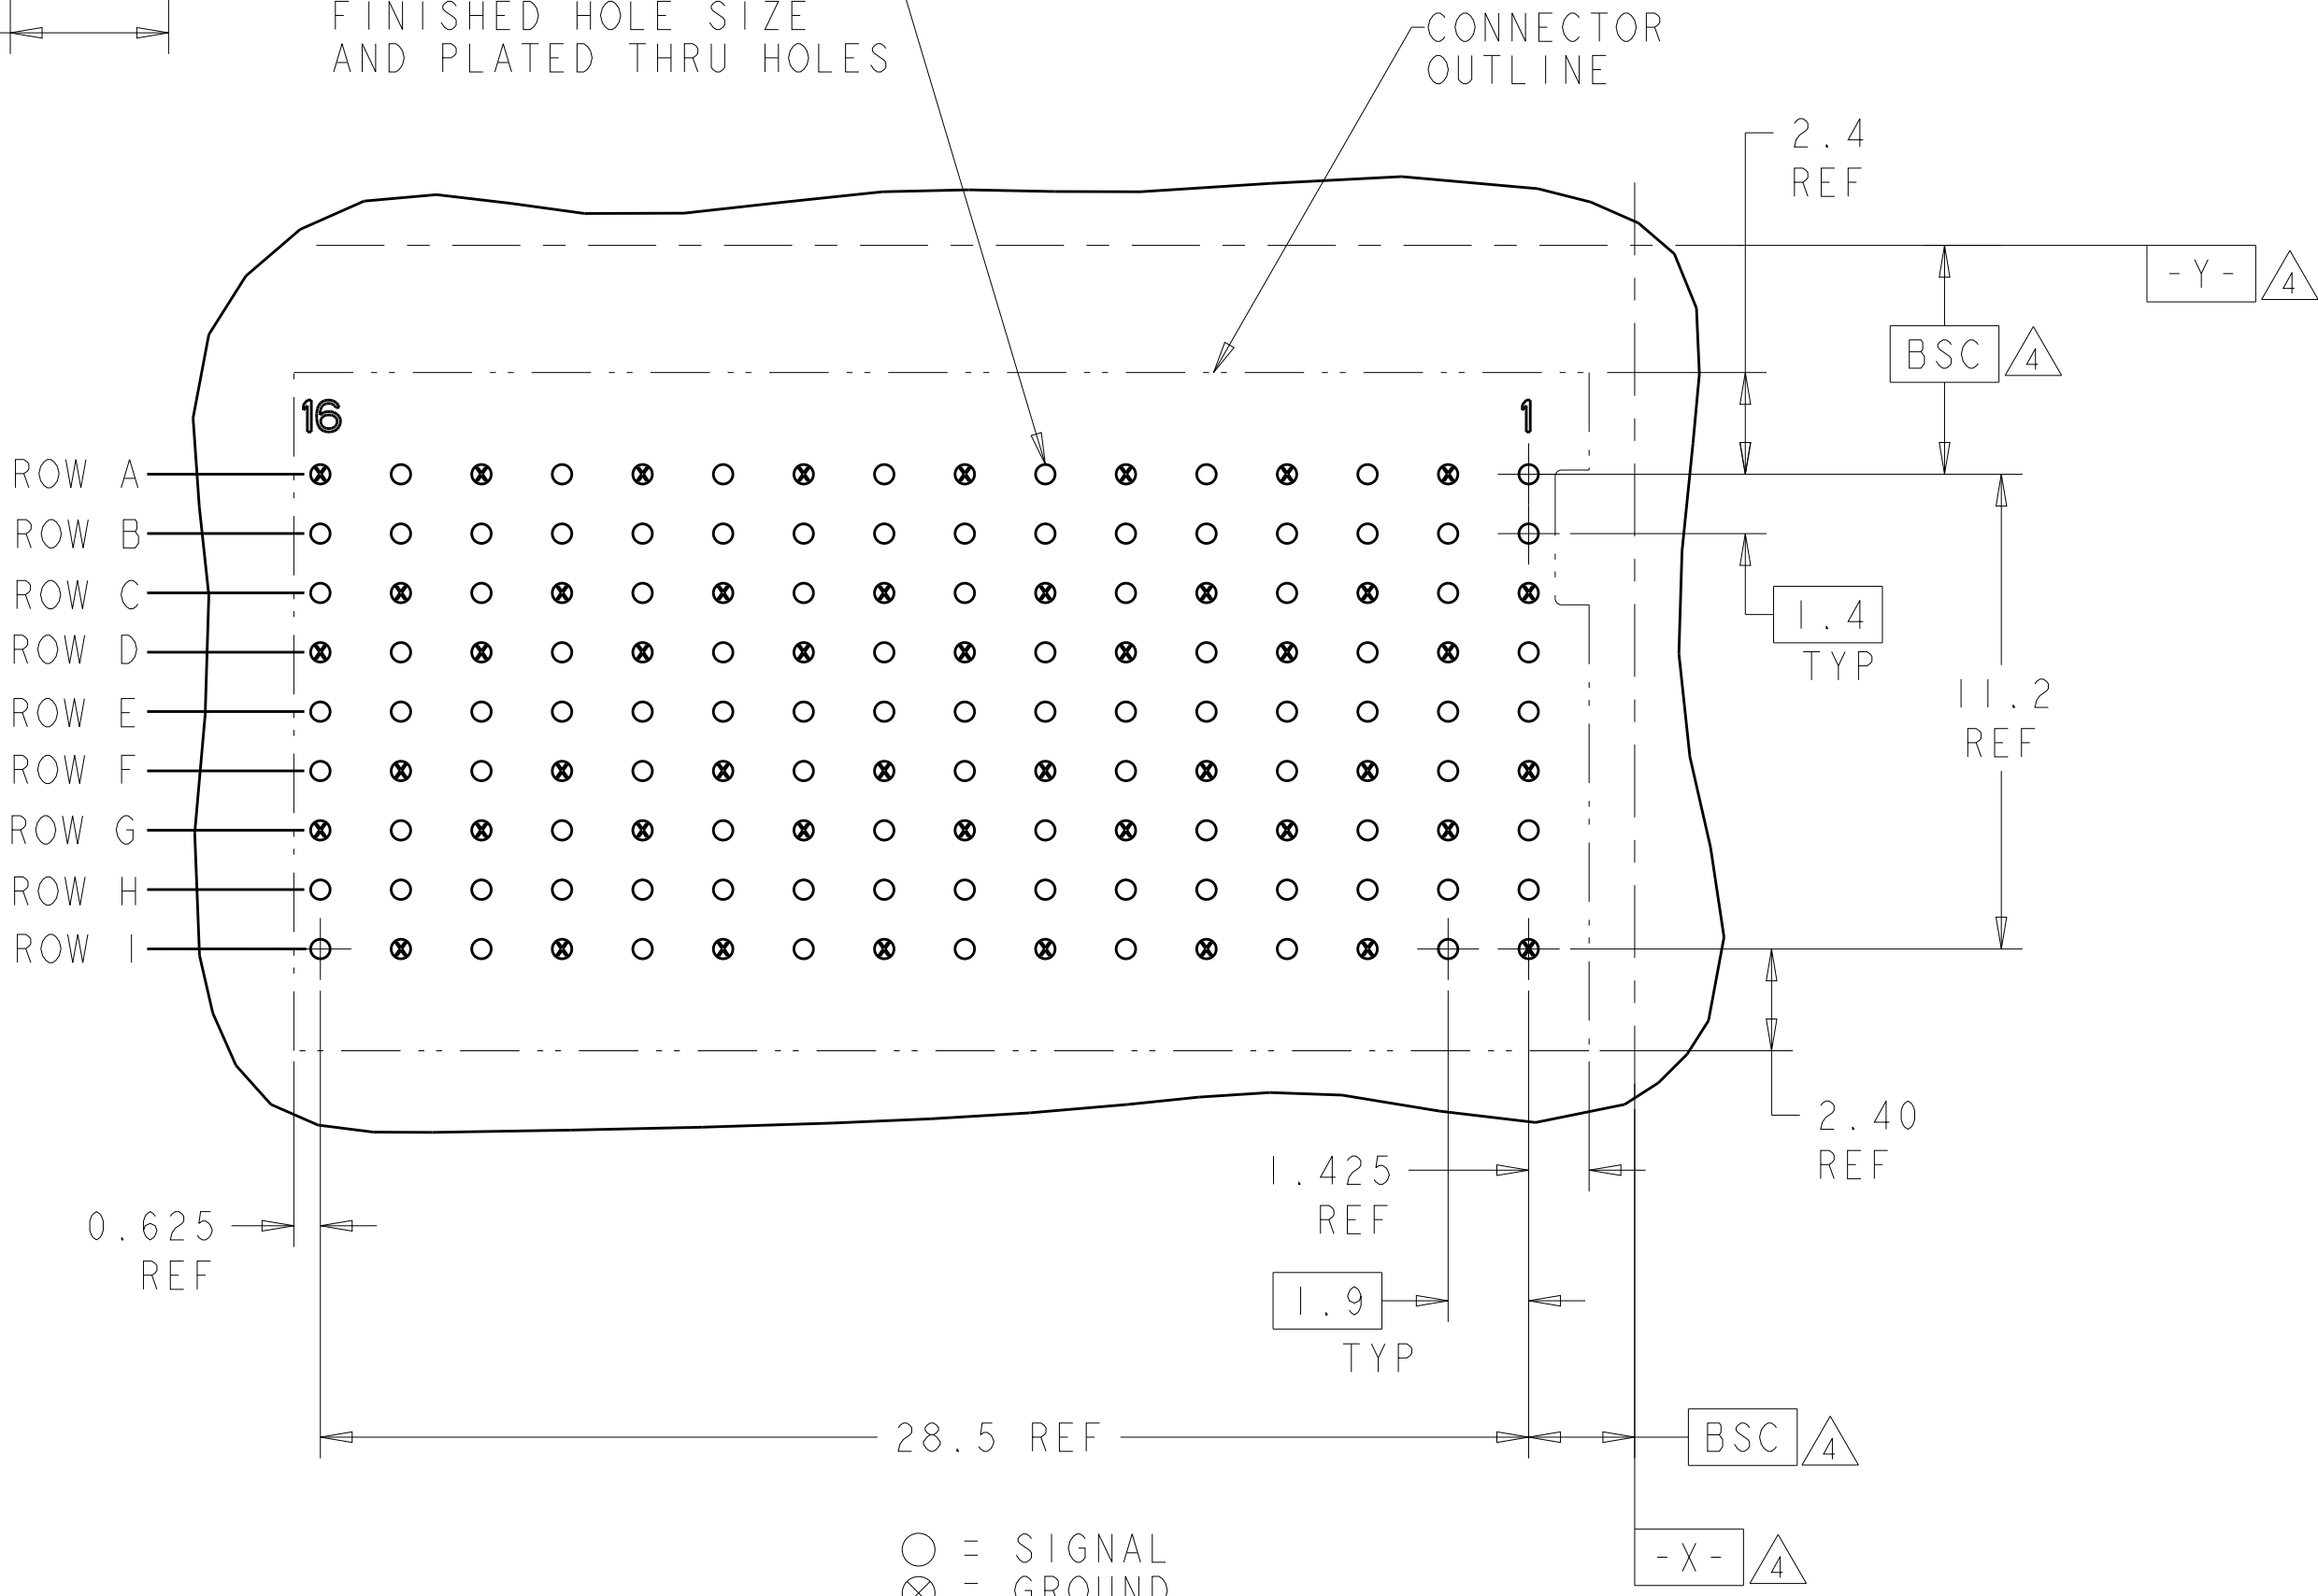

- △ MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- △ 2 FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- △ 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN
- △ 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ 6 REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

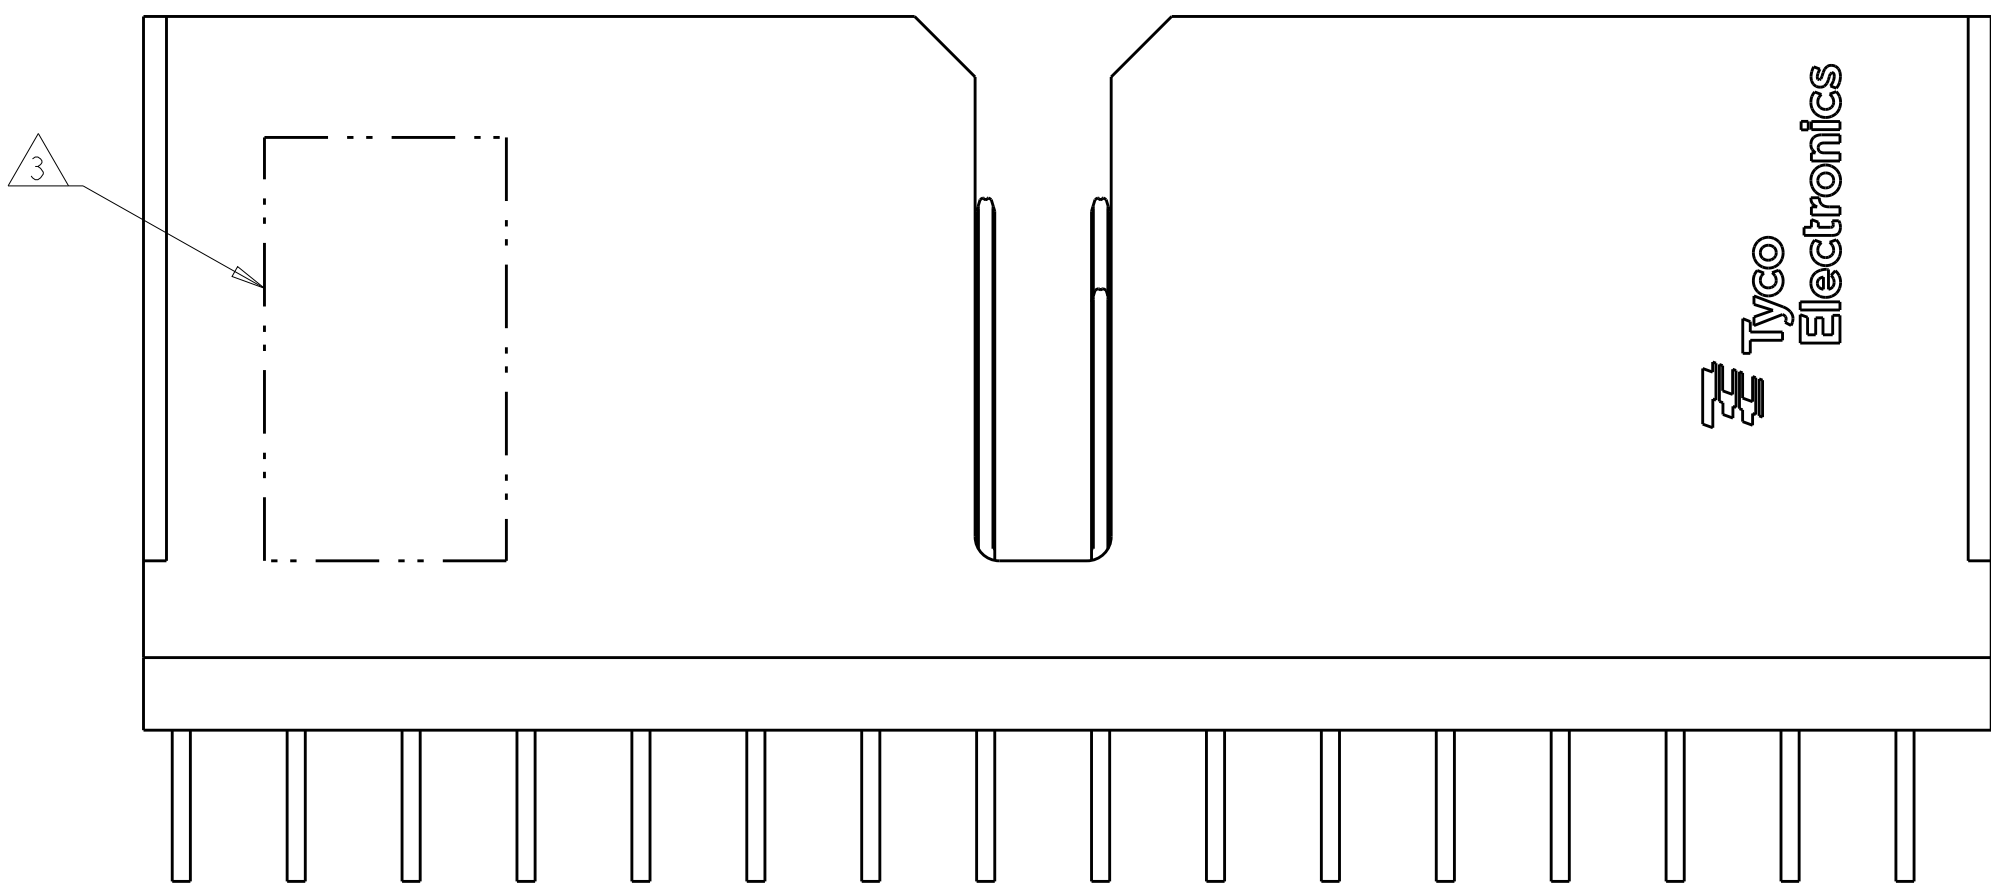

RECOMMENDED PC BOARD
LAYOUT BACKPLANE,
COMPONENT SIDE SHOWN
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN B. MCMASTER 25MAY2007	TE Connectivity	
		CHK W. DAVIS 25MAY2007		
DIMENSIONS:		APVD W. DAVIS 25MAY2007	NAME	
mm		PRODUCT SPEC	HEADER ASSEMBLY, OPEN ENDED, 3 PAIR, 16 COLUMN TinMan	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
0 PLC ±		FINISH	A100779C=1934343	
1 PLC ±		WEIGHT	RESTRICTED TO	
2 PLC ±		Customer Drawing	SCALE 8:1 SHEET 1 OF 1 REV E	
3 PLC ±				
4 PLC ±				
ANGLES				