

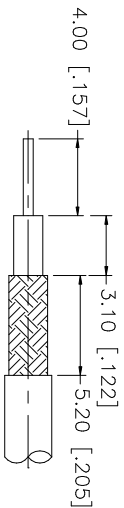




DESCRIPTION		
REV.	DATE	
NC	11/21/99	INITIAL RELEASE
A	08/17/06	UPDATE DRAWING FORMAT

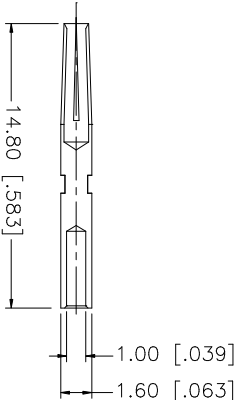

RECOMMENDED
CABLE STRIPPING DIM'S

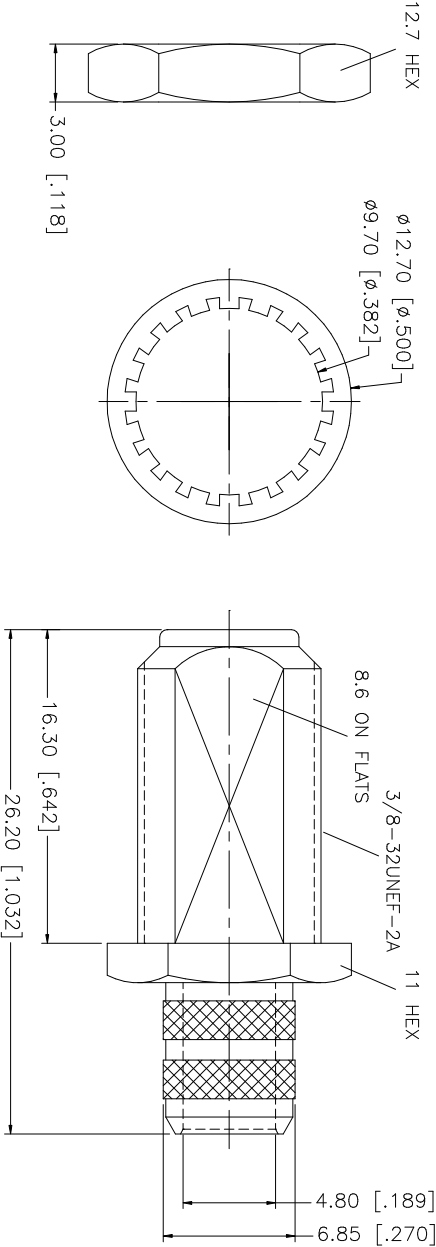

RECOMMENDED
MOUNTING HOLE



NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .320".
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .052"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION	F BULKHEAD CRIMP JACK (FOR RG-6/U CABLE – 75ohm)	222161	DWG. NO. 222161.DWG	REV. A	SIZE A	SCALE NA
8														
7														
6	FERRULE	BRASS	NICKEL	1										
5	HEX NUT	BRASS	NICKEL	1										
4	LOCK WASHER	BRASS	NICKEL	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										
					DO NOT SCALE DRAWING									
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm									
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"									
					CAD FILE C:/222/222161.DWG									