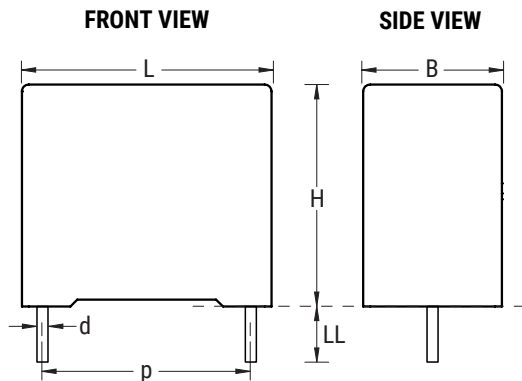


**Sample Kit Contents**

KEMET Part Number	Capacitance	Size Code	Lead Spacing	Capacitance Tolerance	dV/dt	Quantity
	$\mu\text{F}$		mm	%	V/ $\mu\text{s}$	
F863BC104K310ALW0L	0.1	BK	15	10	400	10
F863BK224K310ALW0L	0.22	BK	15	10	400	10
F863BW474K310ALW0L	0.47	BW	15	10	400	10
F863BW564K310ALW0L	0.56	BW	15	10	400	10
F863DE474K310ALW0L	0.47	DE	22.5	10	200	10
F863DS105K310ALW0L	1.0	DS	22.5	10	200	10
F863DV155K310ALW0L	1.5	DV	22.5	10	200	10
F863FL225K310ALW0L	2.2	FL	27.5	10	150	10
F863RL475M310ALW0L	4.7	RL	37.5	10	100	10

**Dimensions – Millimeters**

Size Code	p		B		H		L		d	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
BC	15.0	$\pm 0.4$	5.0	+0.2	11.0	+0.1	18.0	+0.3	0.6	$\pm 0.05$
BK	15.0	$\pm 0.4$	7.5	+0.2	13.5	+0.1	18.0	+0.5	0.6	$\pm 0.05$
BW	15.0	$\pm 0.4$	11.0	+0.2	19.0	+0.1	18.0	+0.5	0.8	$\pm 0.05$
DE	22.5	$\pm 0.4$	7.0	+0.2	16.0	+0.1	26.5	+0.3	0.8	$\pm 0.05$
DS	22.5	$\pm 0.4$	11.0	+0.2	20.0	+0.1	26.5	+0.3	0.8	$\pm 0.05$
DV	22.5	$\pm 0.4$	13.0	+0.2	22.0	+0.1	26.5	+0.3	0.8	$\pm 0.05$
FL	27.5	$\pm 0.4$	13.0	+0.2	25.0	+0.1	32.0	+0.3	0.8	$\pm 0.05$
RL	37.5	$\pm 0.4$	19.0	+0.3	32.0	+0.1	41.5	+0.3	1.0	$\pm 0.05$