



Main

| | |
|-------------------------------|-------------------------------|
| Range of product | OsiSense XU |
| Series name | Application food and beverage |
| Electronic sensor type | Photo-electric sensor |
| Sensor name | XU2 |
| Sensor design | Cylindrical M18 |
| Detection system | Thru beam |
| Material | Stainless steel |
| Line of sight type | Axial |
| Type of output signal | Discrete |
| Supply circuit type | DC |
| Wiring technique | 3-wire |
| Discrete output type | NPN |
| Discrete output function | 1 NO or 1 NC programmable |
| Electrical connection | Cable |
| Cable length | 6.56 ft (2 m) |
| Product specific application | - |
| Emission | Infrared thru beam |
| [Sn] nominal sensing distance | 49.21 ft (15 m) thru beam |

Complementary

| | |
|---------------------------|--|
| Enclosure material | Stainless steel : 304 CU |
| Lens material | PMMA |
| Maximum sensing distance | 65.62 ft (20 m) |
| Output type | Solid state |
| Add on output | Without |
| Add on input | Breaking test + programming |
| Cable composition | 4 x 0.34 mm ² |
| Wire insulation material | PvR |
| Cable outer diameter | 0.17 in (4.2 mm) |
| Status LED | 1 LED (green) supply on 1 LED (yellow) output state |
| [Us] rated supply voltage | 12...24 V DC with reverse polarity protection |
| Supply voltage limits | 10...30 V DC |
| Switching capacity in mA | <= 100 mA (overload and short-circuit protection) |
| Switching frequency | <= 500 Hz |
| Voltage drop | <= 1.5 V (closed state) |
| Current consumption | <= 50 mA (no-load) |
| Delay first up | <= 15 ms |
| Delay response | <= 1 ms |
| Delay recovery | <= 1 ms |
| Setting-up | Without sensitivity adjustment |
| Diameter | 0.71 in (18 mm) |
| Length | 2.44 in (62 mm) |
| Product weight | 0.6 lb(US) (0.27 kg) |
| Kit composition | Transmitter + receiver |

Environment

| | |
|------------------------|----|
| product certifications | CE |
|------------------------|----|

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

CSA
UL

| | |
|---------------------------------------|--|
| ambient air temperature for operation | -13...131 °F (-25...55 °C) |
| ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| vibration resistance | 25 gn, amplitude = +/- 1.5 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| shock resistance | 30 gn (duration = 11 ms) conforming to IEC 60068-2-27 |
| IP degree of protection | IP67 conforming to IEC 60529 |

Offer Sustainability


| | |
|--|--|
| Not Green Premium product | Not Green Premium product |
| Will be Compliant on 3Q2013 | Will be Compliant on 3Q2013 Will be Compliant on 3Q2013 |
| Available | Available |
| Available | Available |
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|


Dimensions

Transmitter's Dimensions

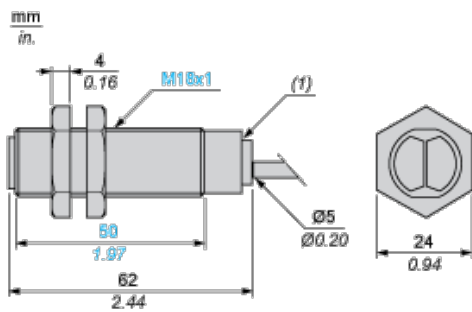

(1) LED

Receiver's Dimensions

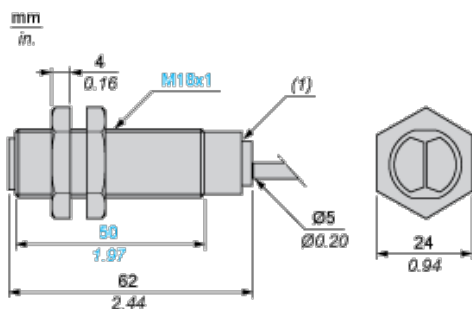

(1) LED


Mounting and Clearance

Fixing nut tightening torque: < 15 N.m

Connector tightening torque: 2 N.m


Wiring Schemes

Transmitter



BN : Brown
 VI : Violet (beam break input)
 BU : Blue

3-wire, NPN NO or NC Programmable Function

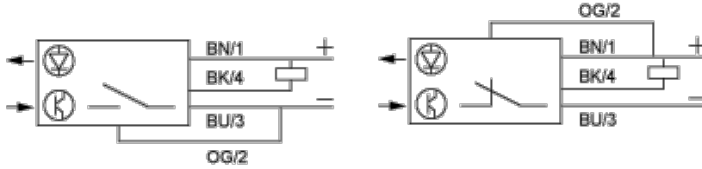


BN : Brown
 BK : Black (out / output)
 BU : Blue
 OG : Orange (program)

Wiring Schemes


Beam Break Input on Thru-beam Transmitter

Beam made

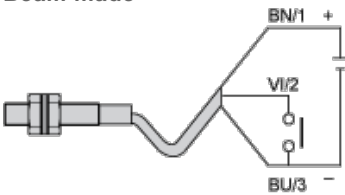

BN : Brown
 VI : Violet (beam break input)
 BU : Blue


Beam broken

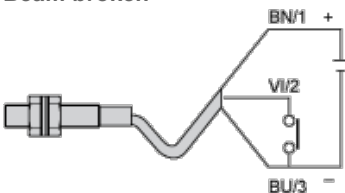

BN : Brown
 VI : Violet (beam break input)
 BU : Blue

Detection Curves


Thru-beam System

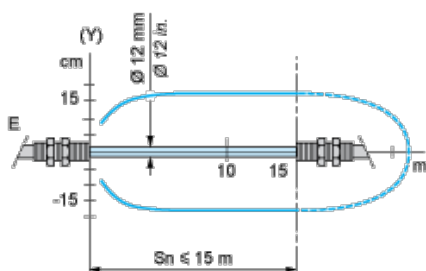

(y) Ø of beam

Excess Gain Curves (Ambient Temperature: + 25° C)

Thru-beam System

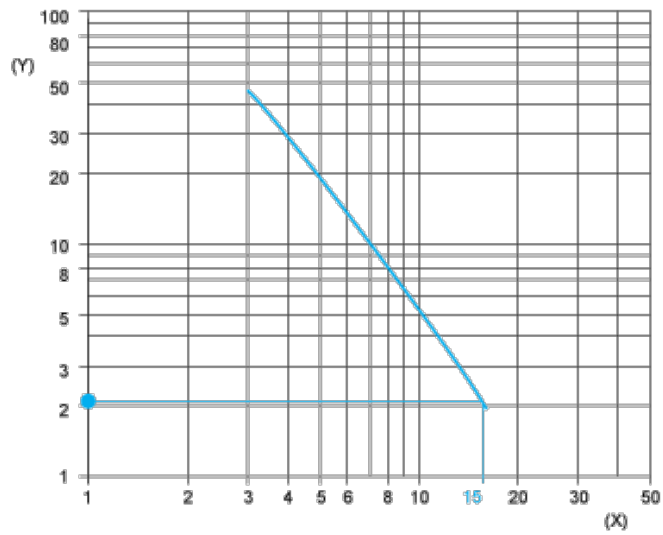

(y) Gain

(x) Distance (m)