

MALLORY

Mallory Sonalert Products, Inc.

Sales Outline Drawing

Part #: JT028-RY-CSL

Revision: C


Specifications:

Stack Number:	1	2		
LED Color:	RED	YELLOW		
Connection Wires:	Red and Brown	Yellow and Brown		
LED Current Draw:	<50 mA	<60 mA		
Rated Voltage:		24 VAC/DC		
Operating Voltage:		20-28 VAC/DC		
Sound Level Category:	Loud	Loud	Loud	Loud
Mode of Operation:	Continuous	Medium Pulse (5PPS)	Double Pulse (0.5PPS)	Continuous for 5 sec then 0.1s beep until reset
Connection:	Black and Gray Wires	Black and Gray Wires; Orange wire connected to	Black and Gray Wires; Purple wire connected to Green/Yellow wire	Black and Gray wires; Orange and Purple wires connected to Green/Yellow wire
Sound Current Draw:	40mA Max.	40mA Max.	40mA Max.	40mA Max.
Loudness @ 1m:		80-85 dB(A) Typ.		
Frequency:		2000 ± 500 Hz		
Total Max Current:		<150mA with all LED's and sound unit working		
Operating Temperature:		-25° ~ +60°C		
Lens Color:		Opaque White		
Material:		ABS FR15U		
Mounting Method:		Stainless Steel Pole		
Weight Typical (g):		685		
NEMA 12:		Approved		
Options:	Please contact factory.			

Dimensions: Inches (mm)

cUL Recognized
PATENT NUMBER 10309594

ROHS Compliant

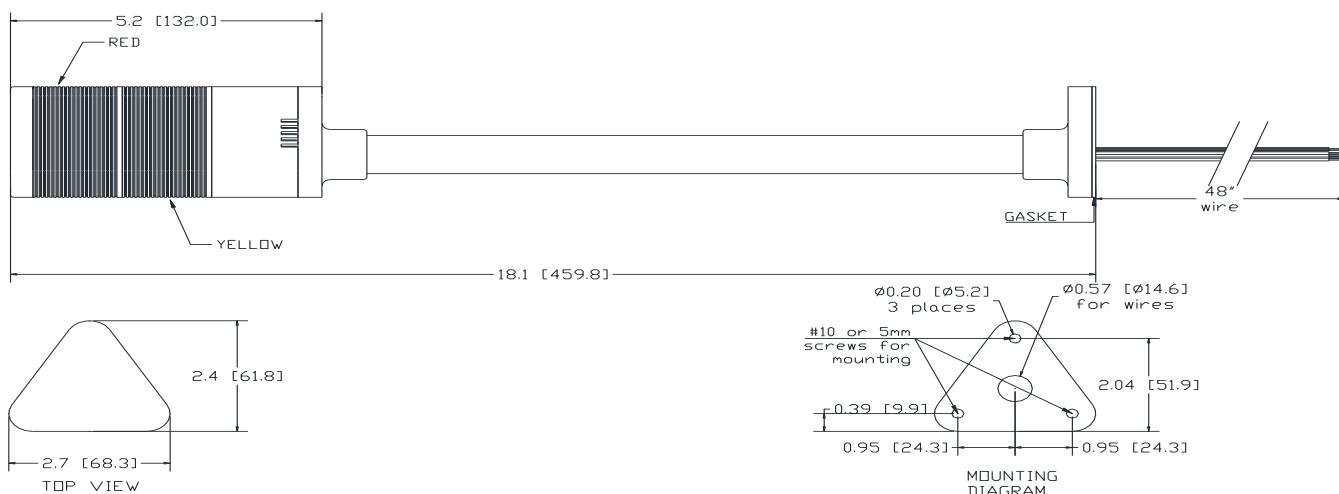

LED OPERATION: CONNECT STACK COLOR WIRE TO POWER AND BROWN WIRE TO POWER.

SOUND OPERATION: CONNECT GRAY AND BLACK WIRES TO POWER FOR CONTINUOUS SOUND.

FOR MEDIUM PULSE, CONNECT GRAY & BLACK TO POWER AND ORANGE WIRE TO GREEN/YELLOW WIRE.

FOR DOUBLE PULSE, CONNECT GRAY & BLACK TO POWER AND PURPLE WIRE TO GREEN/YELLOW WIRE.

FOR CONT/BEEP, CONNECT GRAY & BLACK TO POWER AND ORANGE & PURPLE TO GREEN/YELLOW WIRE.