


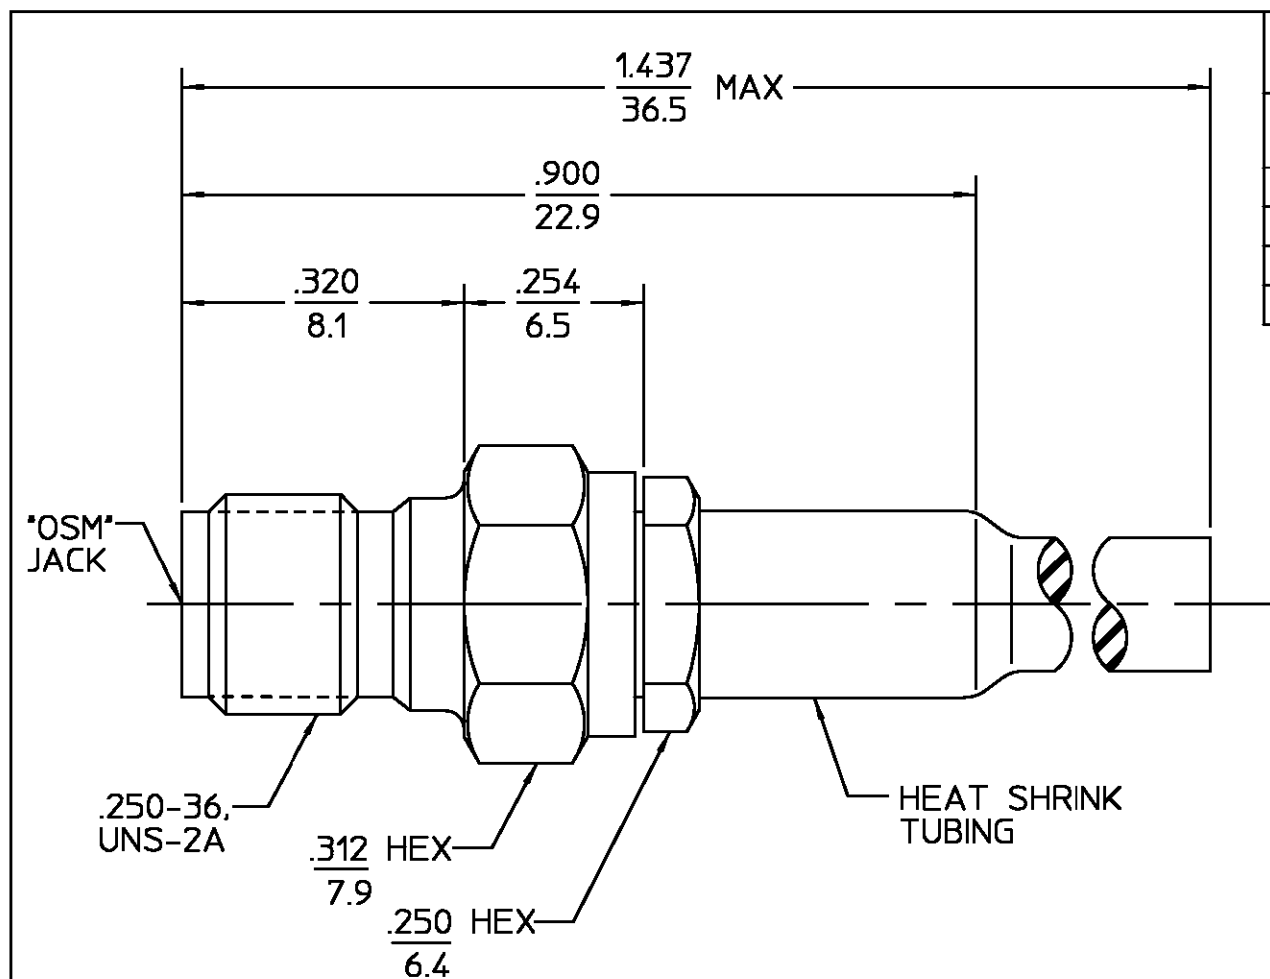

DESIGNED FOR USE WITH RG-188/U		REVISIONS			
		REV	DESCRIPTION	DATE	APPROVED
CABLE ENTRY DIAMETER MINIMUM		01 ₂	REVISED	9/13/2006	
CONTACT	.021				
DIELECTRIC	.023				
SLEEVE	.066				
FERRULE	.125				

HOUSING CLAMP NUT SLEEVE	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
O-RING	SILICONE RUBBER PER ZZ-R-765	N/A
SHRINK TUBING	HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/4	N/A
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1° These drawings and speci- fications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale o f item(s) without written permission.		
DRAWN BY FMC DATE 9/15/77 CHECKED BY KWW DATE 9/21/77 APPD BY RMF DATE 9/21/77 AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599 AMP TITLE "OSM" STRAIGHT CABLE JACK CRIMP-CLAMP ATTACHMENT NO. A.P. 408-04808 (20-057) USE ASS'Y PROCEDURE SIZE B CODE IDENT NO. 26805 2032-5003-02 REV 01₂ SCALE 5:1 SHEET 1 OF 1		

NOTES:
1. CAPTURED CENTER CONTACT

.XXX = in
XX.X = mm (REF)