THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – ,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
—	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECO–14–008835	26JUN14	AP	DM

NOTE:

1. PACKAGING ACC. TO TE SPEC.107–18032
   BUNDLE EVERY 25 ASSEMBLIES WITH A RUBBER BAND
2. ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO TE–SPEC.108–18857, SUBSECTION 3.1.1
3. ASSEMBLY COLOR: WHITE
4. KEYING: HV–4

PN	L	TOLERANCES/mm
X–2083076–1	610mm (2ft)	+/– 5
X–2083076–2	1270mm (4ft)	+/– 15
X–2083076–3	1880mm (6ft)	+/– 20
X–2083076–4	2490mm (8ft)	+/– 20
X–2083076–5	3100mm (10ft)	+/– 30
X–2083076–6	3660mm (12ft)	+/– 30
X–2083076–7	4270mm (14ft)	+/– 50
X–2083076–8	4880mm (16ft)	+/– 50

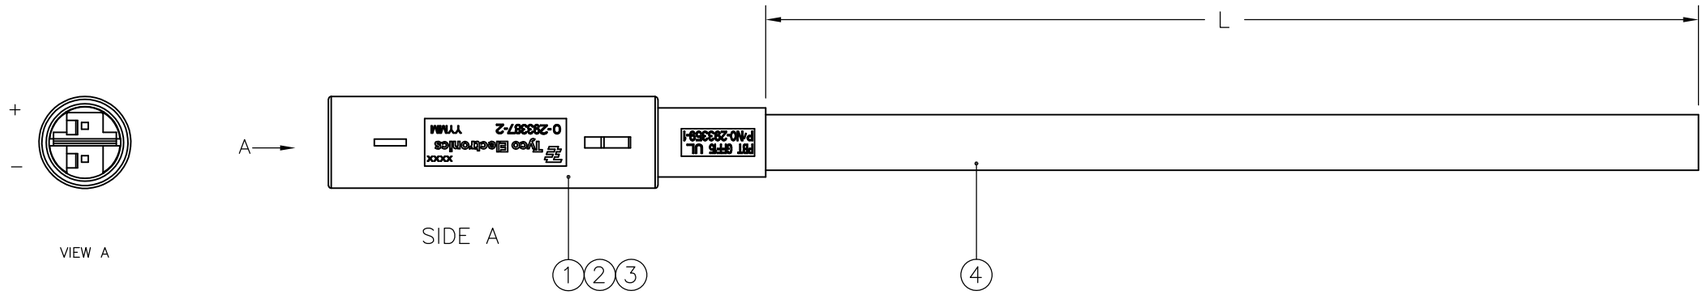

mm	AR	Cable SVT 2xAWG18 UL WH	4
PC	1	TUBE FOR SVT CABLE	3
PC	2	MICRO QUADLOK SYSTEM PIN CONTACT	2
PC	1	OUTLET, MINI HVL 7.5mm HV–4	1
UOM	QTY	DESCRIPTION	POS.
	1––X		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN SATHISH KUMAR.G 02APR11
CHK R.HOSSAINI 04APR11
APVD R.HOSSAINI 04APR11
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME CABLE ASSEMBLY NECTOR S LINE 2POS. HV–4

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–2083076	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV D