




ALL rights strictly reserved.
Reproduction
or issue to third parties in any form
whatsoever is not permitted without
written
authority from the proprietor.
Property of FCI. Copyright FCI.

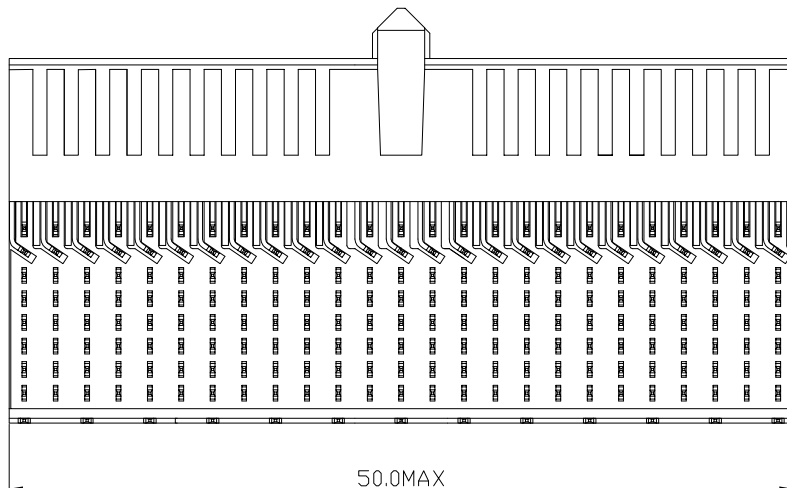

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT./CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10^4 MΩ MIN

NOTES

1.

```
graph TD
    1["1."] --> LF["LEAD FREE INDICATOR 4LF=LEAD FREE"]
    1 --> PLI["PERFORMANCE LEVEL INDICATOR  
(REF DWG NO.BSC 201844.003)"]
    PLI --> 2["2. THIS PRODUCT IS CSA APPROVED.  
THIS PRODUCT IS UL RECOGNIZED."]
    PLI --> 3["3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :  
BSA201572.001"]
    2 --> 4["4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES  
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008"]
```

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BSA201572.001

4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

		www.fciconnect.com				tolerance 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HDKLEN		projection 			
Dr	R.MOONS	14-11-00	Product family		MILLIPICS		size	A4		Scale	
Eng			Spec ref							3/1	
Chr			Material				ECN				
Appr											
title MPACS 8+2R RA RCP CONN TYPE DE/UPPER SHIELDED						dwg no BS,C ,202260,025		Rev C			
catalog no			HM2R95PA8108----			CUMSTOMER			sheet 1 of 1		