

NUMBER OF CONTACTS	"A" Inch (mm)	"B" Inch (mm)	"C" Inch (mm)	"D" Inch (mm)	"E" Inch (mm)
15	1.213 (30.80)	.984 (24.99)	.666 (16.92)	.090 (2.29)	.756 (19.20)
26	1.543 (39.20)	1.312 (33.32)	.970 (24.65)	.090 (2.29)	1.091 (27.70)
44	2.087 (53.00)	1.852 (47.04)	1.512 (38.40)	.090 (2.29)	1.618 (41.10)
62	2.732 (69.40)	2.500 (63.50)	2.157 (54.80)	.095 (2.41)	2.256 (57.30)
78	2.638 (67.00)	2.406 (61.10)	2.079 (52.81)	.095 (2.41)	2.169 (55.10)

NOTE:

MATERIAL

HOUSING:

PBT UL94V-0, BLACK
230°C PROCESS TEMP
COPPER ALLOY
STEEL

CONTACT:

SHELL:

FULL GOLD FLASH
NICKEL

FINISH

CONTACT:

SHELL:

ELECTRICAL

RATED CURRENT:

5A

DWV:

500VAC RMS FOR 1 MIN

INSULATOR RESISTANCE:

1000 MΩhms MIN.


CONTACT RESISTANCE:

15 mΩhms MAX.

ENVIRONMENT

OPERATION TEMPERATURE:




-50°C TO +100°C

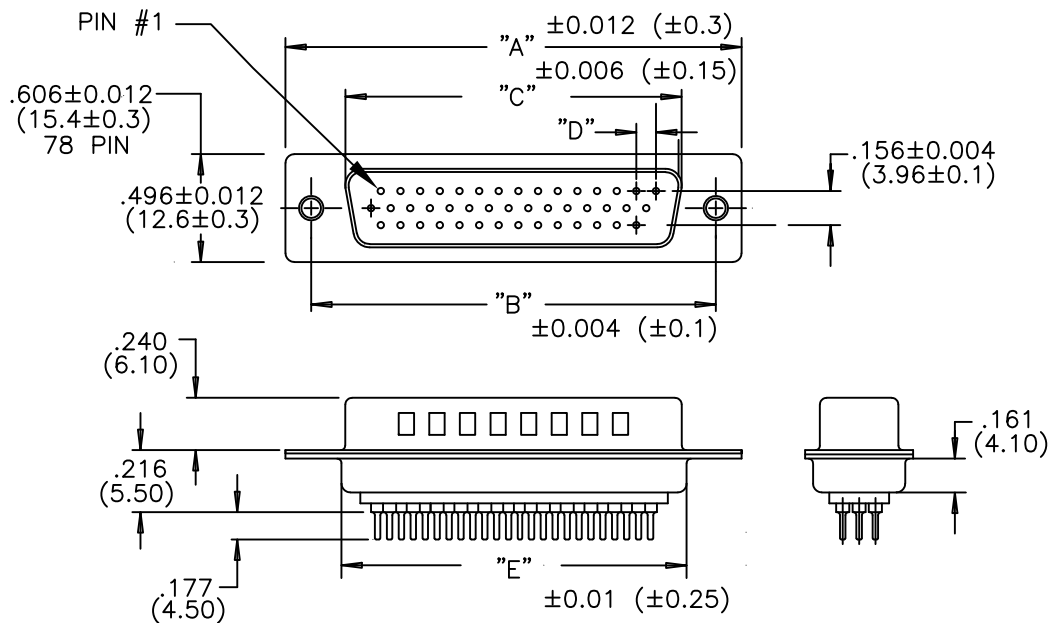

00 THRU HOLE

55 CN

03 CN // JACK SCREW



SERIES _____ 197-YYY-Y13LYY1
NUMBER OF CONTACTS _____
GENDER _____
1 = MALE
2 = FEMALE (NO GROUND INDENTS)
PC MOUNT _____
3 = NICKEL SHELL _____

HARDWARE OPTIONS:

00 = .120 MOUNTING HOLE

55 = 4-40 CLINCH NUT (CN)

03 = 4-40 CLINCH NUT (CN) && 4-40 JACK SCREW

PLATING:

1 = GOLD FLASH

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

P. JENKINS

DATE:

09/15/2005

UNITS = inch (mm)

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

1

OF

1

REV

4

DWG NO.

197-YYY-113LYY1