



Main

| | |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Jumper cable |

Complementary

| | |
|-----------------------------|--|
| Jumper cable end 1 | M12 male, :3 pins (straight), fixing: screw-on and clip-on |
| Jumper cable end 2 | M12 female, :3 pins (straight), fixing: screw-on and clip-on |
| Collar material | Metal |
| Cable composition | 3 x 0.34 mm ² |
| Cable length | 6.56 ft (2 m) |
| Cable outer diameter | 0.2 in (5 mm) |
| System Voltage | 250 V AC 300 V DC |
| Line Rated Current | 4 A |
| Insulation resistance | >= 1000 MOhm |
| Resistance across terminals | <= 5000 mOhm |
| Product weight | 0.21 lb(US) (0.095 kg) |

Environment

| | |
|---------------------------------------|-------------------------------------|
| IP degree of protection | IP69K |
| ambient air temperature for operation | -13...185 °F (-25...85 °C) (static) |

Offer Sustainability


| | |
|--|--|
| Not Green Premium product | Not Green Premium product |
| Compliant - since 0601 - Schneider Electric declaration of conformity | Compliant - since 0601 - Schneider Electric declaration of conformity |
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Dimensions

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

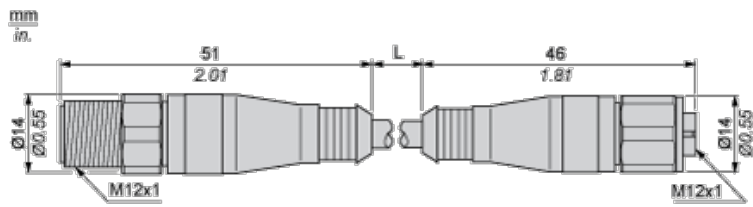

L : Length of cable

Connections and Schemes

