

#### TECHNICAL CHARACTERISTICS



MATERIAL  
INSULATOR: PBT  
FLAMMABILITY RATING: UL94-V0  
COLOR: BLACK  
CONTACT MATERIAL: COPPER ALLOY  
CONTACT TYPE: STAMPED  
CONTACT PLATING: SELECTIVE GOLD  
SHIELDING: BRASS NI PLATED  
QUALITY CLASS: 1500 MATING CYCLES

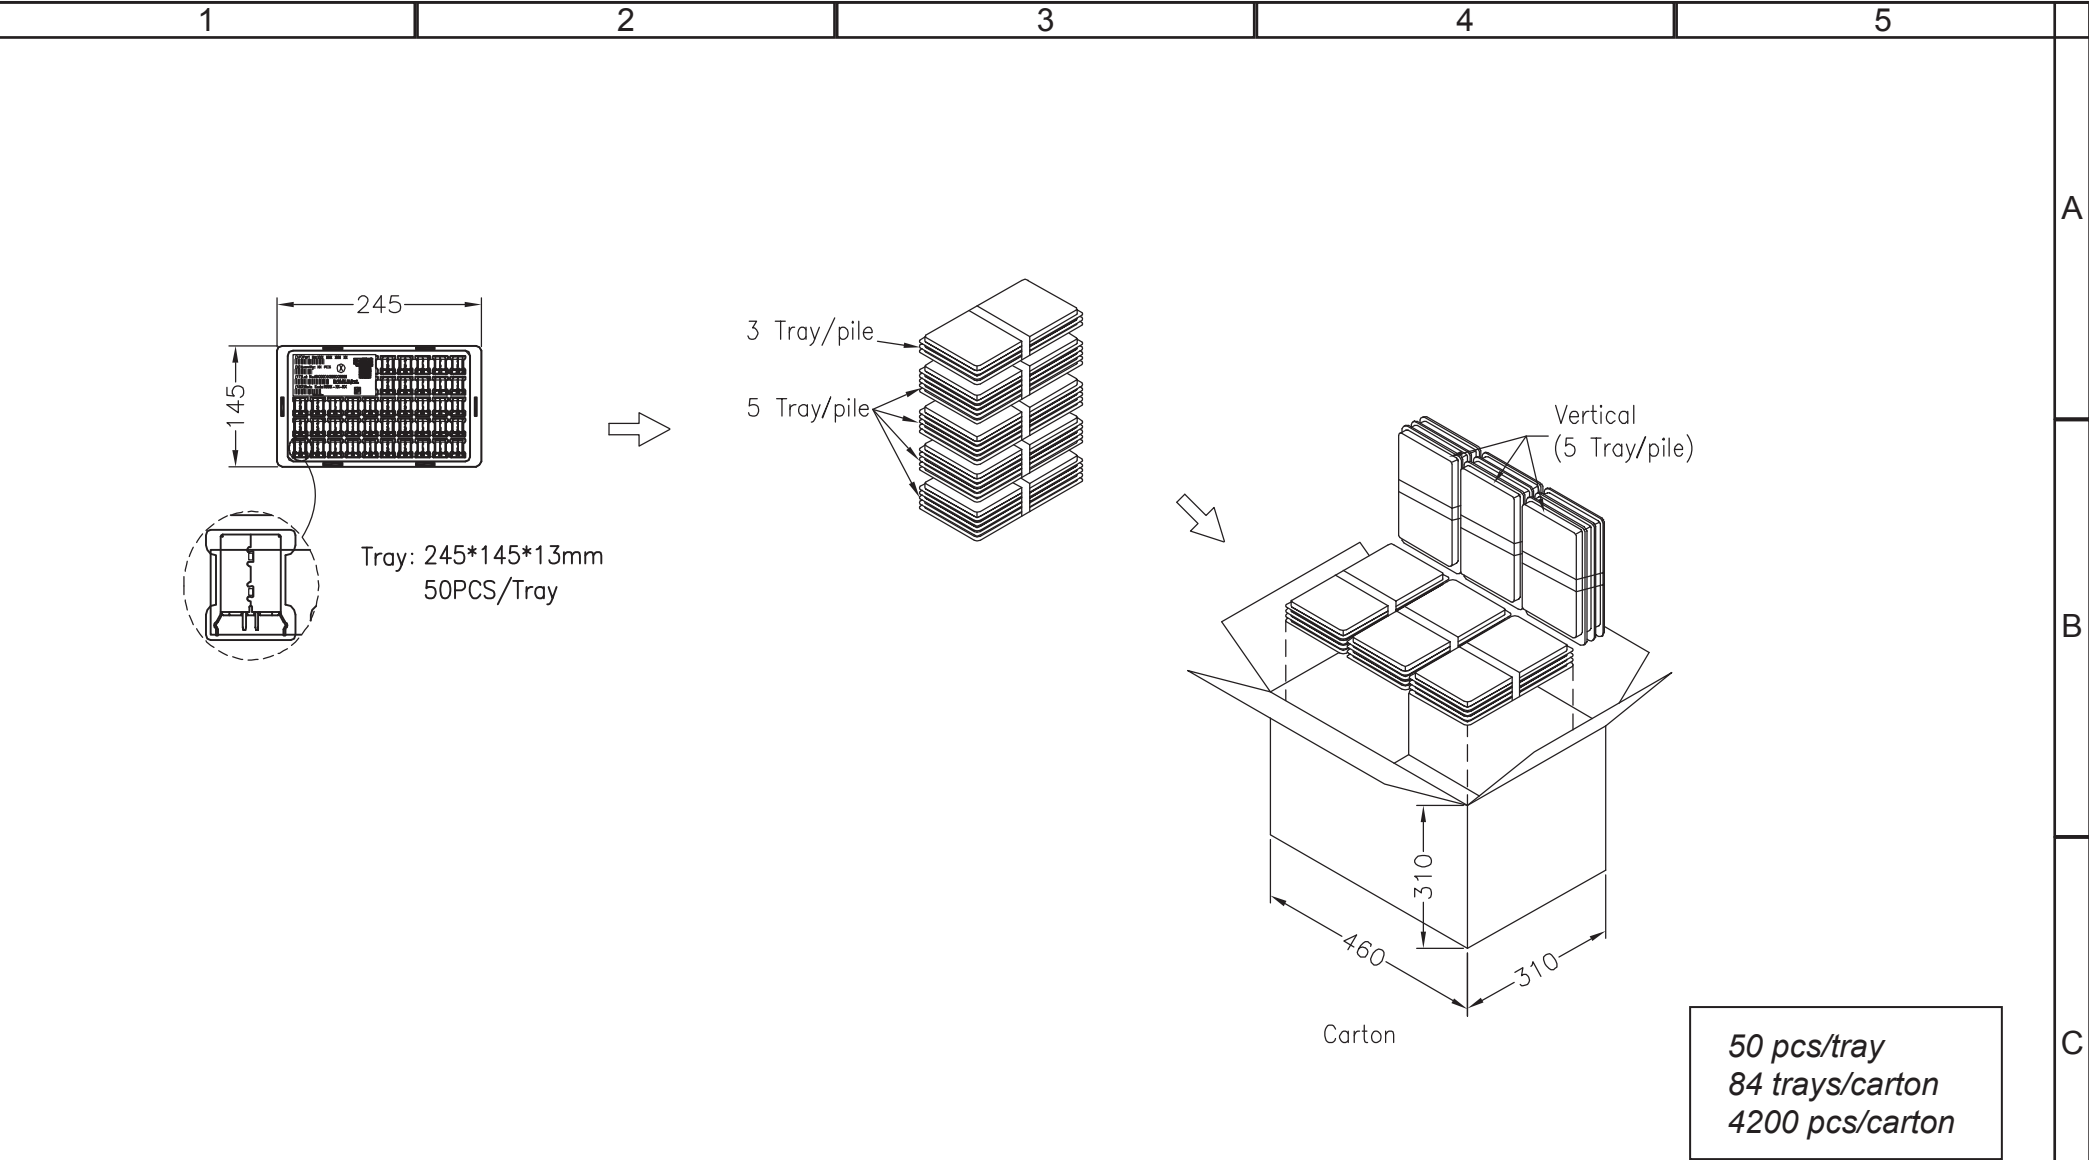
ENVIRONMENTAL  
OPERATING TEMPERATURE: -20 °C UP TO +85 °C  
COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL  
CURRENT RATING: 1.5 A  
WORKING VOLTAGE: 30 VAC  
INSULATION RESISTANCE: >1000 MΩ  
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/MIN  
CONTACT RESISTANCE: 30 mΩ MAX

SOLDERING  
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING  
TRAY

RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = <math>\pm</math> 0.2</div> <div>.XX = <math>\pm</math> 0.15</div>	<div></div>		<div>DESCRIPTION: USB 2.0 TYPE B VERTICAL BLACK</div> <div>WERI PART NO: 614 004 141 221</div> <div>SIZE</div> <div>A4</div>
G								
F								
E								
D	07-JUN-16	TPK	AK	APPROVAL: NPr	UNIT: MM			
C	27-OCT-14	REVIEW	QL		SCALE:			
B	15-FEB-13	DESIGNATION	AR		SHEET: 1/3			
A	18-MAR-08	PDF	CH		DRAW: QL			
REV	DATE	FILE	BY					



RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = <math>\pm</math> 0.2</div> <div>.XX = <math>\pm</math> 0.15</div>	<div></div>		
G								
F								
E								
D								
C				APPROVAL: NPr	UNIT: MM	DESCRIPTION: USB 2.0 TYPE B VERTICAL BLACK		SIZE <b>A4</b>
B					SCALE:			
A					SHEET: 2/3			
REV	DATE	FILE	BY		DRAW: AK	WERI PART NO: 614 004 141 221		

