



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A1		REVISED PER ECO-13-004307	08MAR2013	DD	MB
A2		REVISED PER ECO-16-017603	06DEC2016	DD	AH


CODINGS
2:1

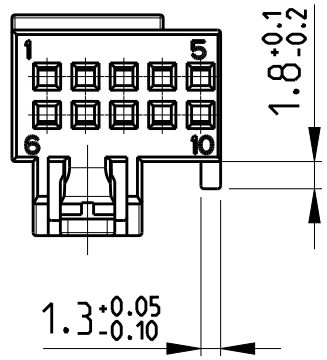


COD. A

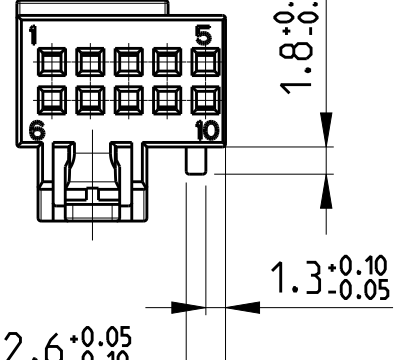


COD. B

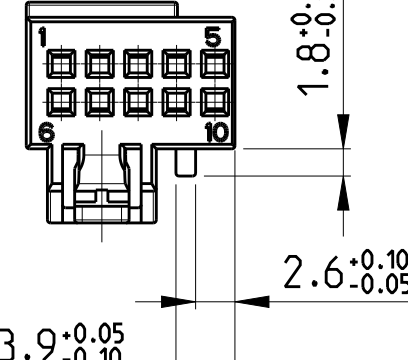


COD. C

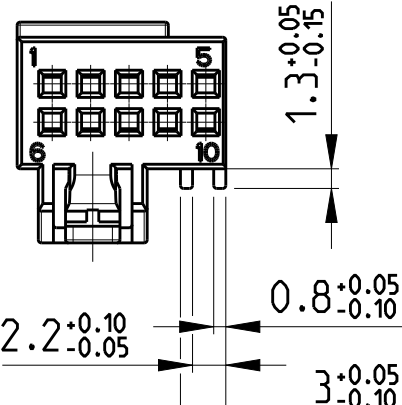


COD. D

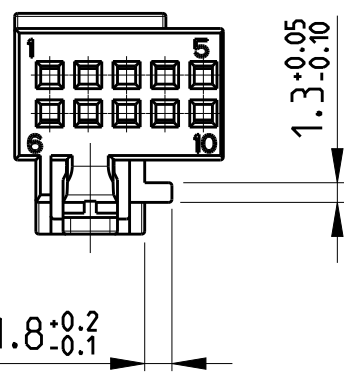

COD. E




COD. Z






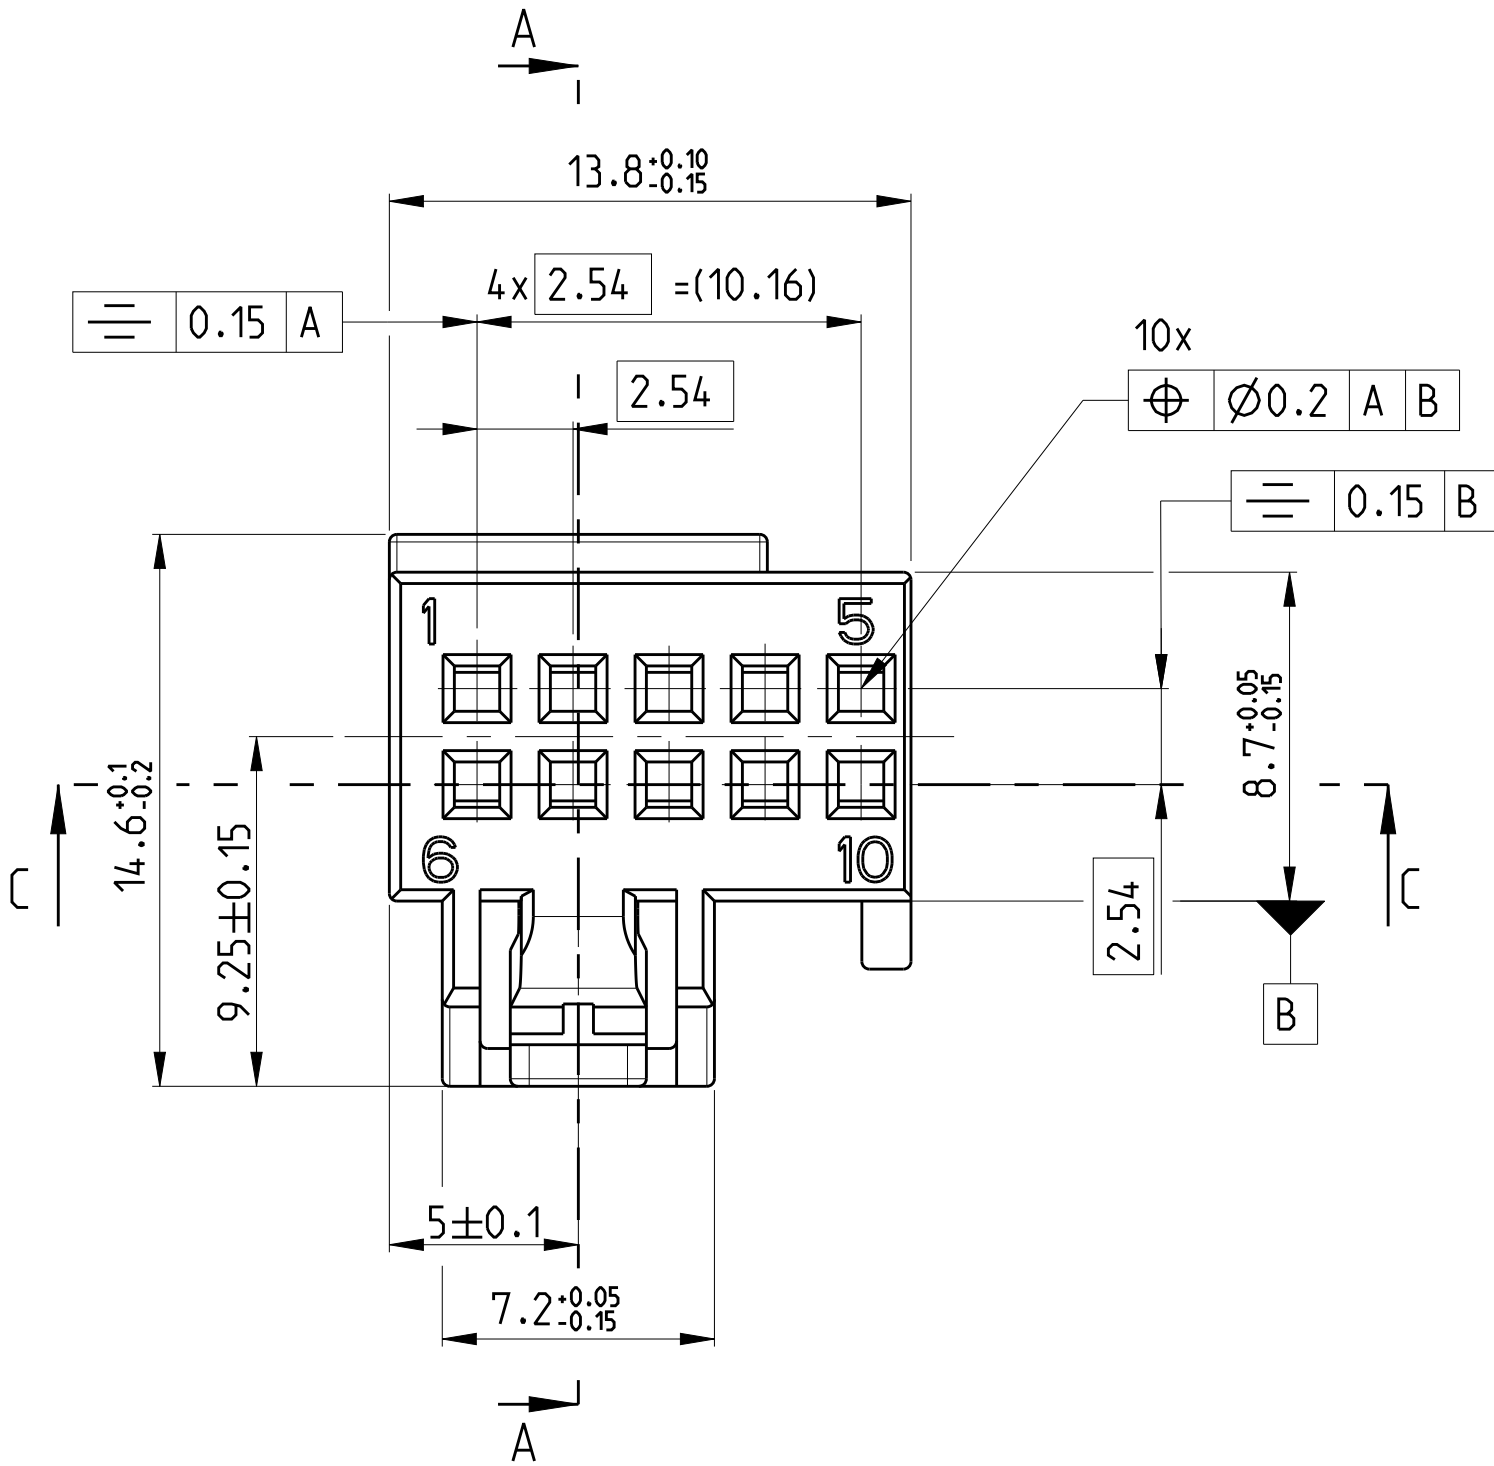


NOTES:


- 1 CODING 1- -1 AS SHOWN
- 2 MOULD CAVITY MARKING
- 3 SUPPLIER MARK
- 4 MATERIAL IDENTIFICATION
- 5 DATE CLOCK
- 6 CAVITIES SUITABLE FOR TE MQS SOCKET HOUSING PN 968562
- 7 FOR COUNTERPART INTERFACE DRAWING SEE SHEET 2 OF 2
- 8 THROUGH HOLE NOT RELEVANT FOR FUNCTION OF CONNECTOR. TOOL RETENTION
- 9 PRESSURE SENSOR NOT RELEVANT FOR FUNCTION OF CONNECTOR

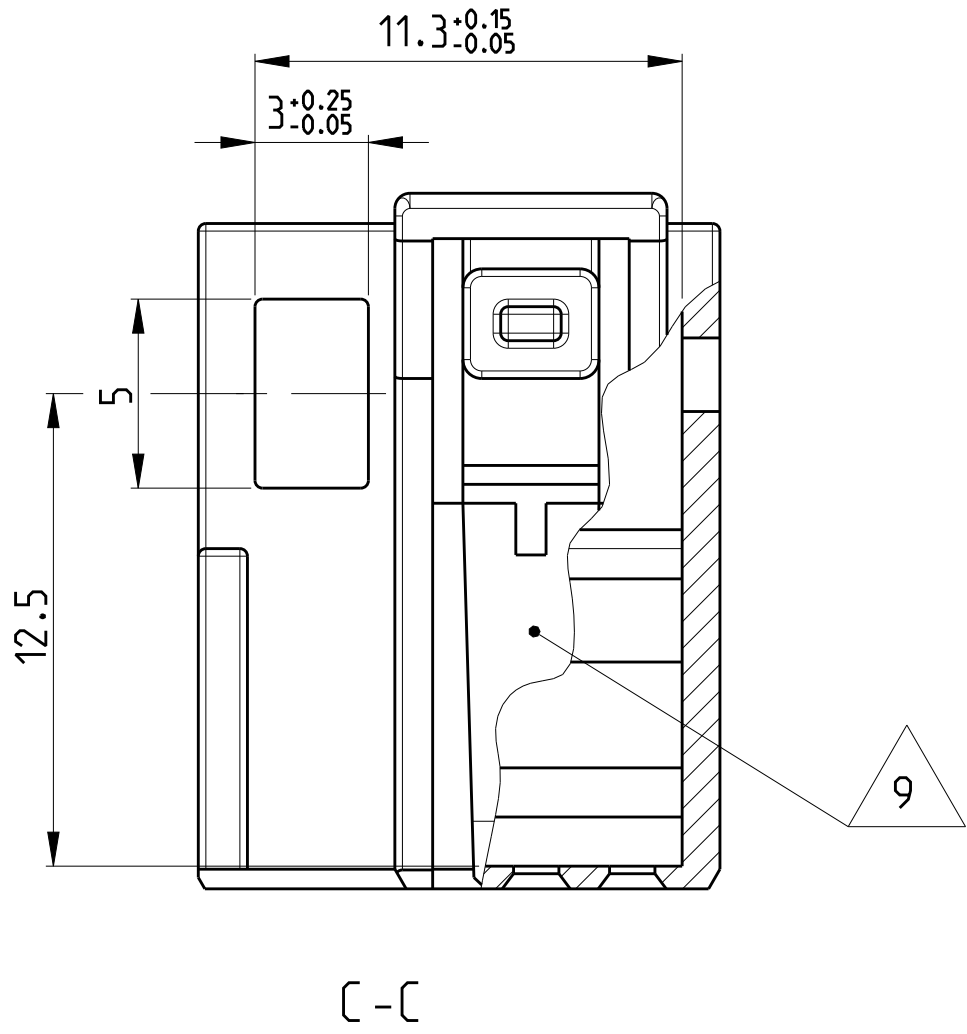

C - C

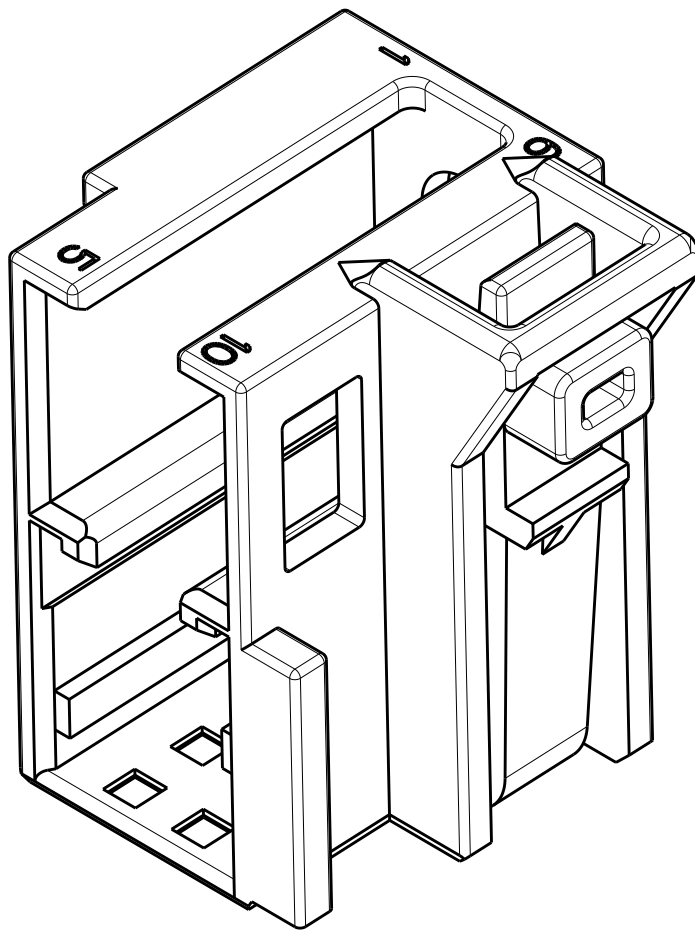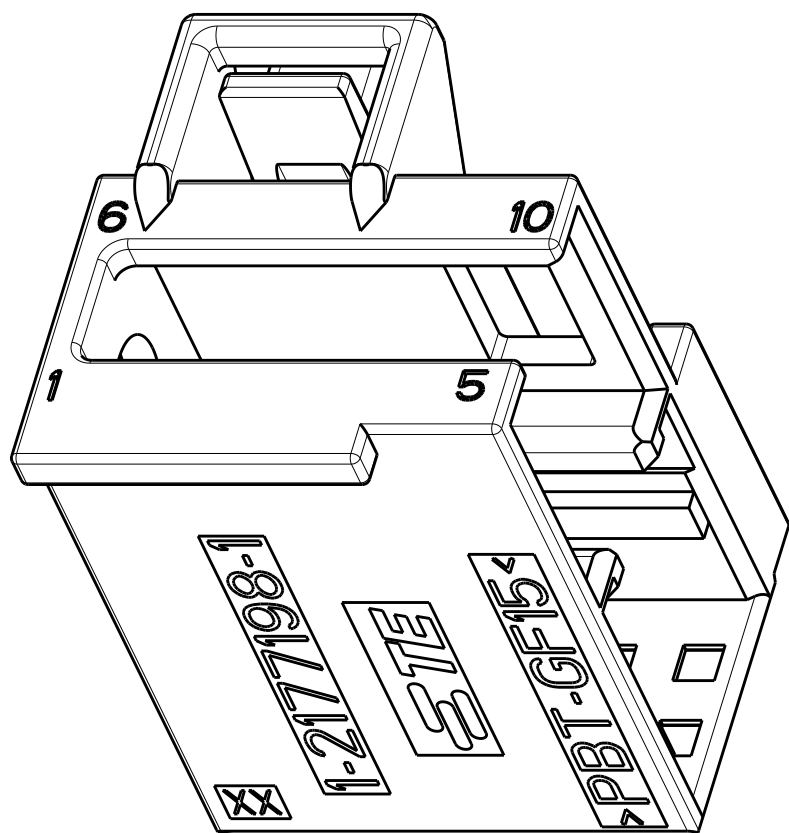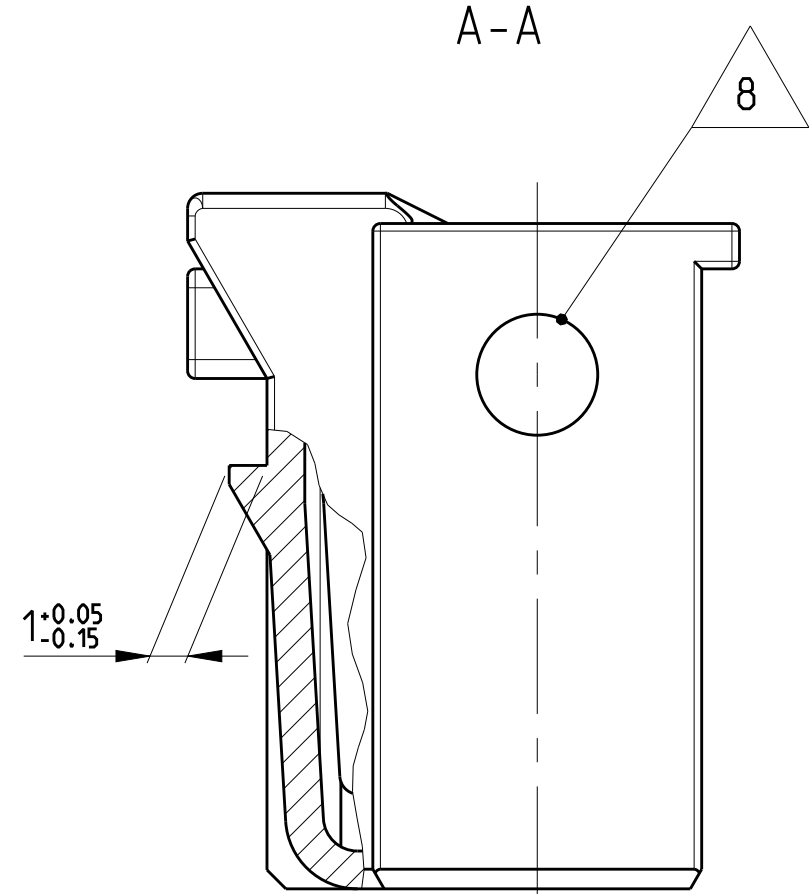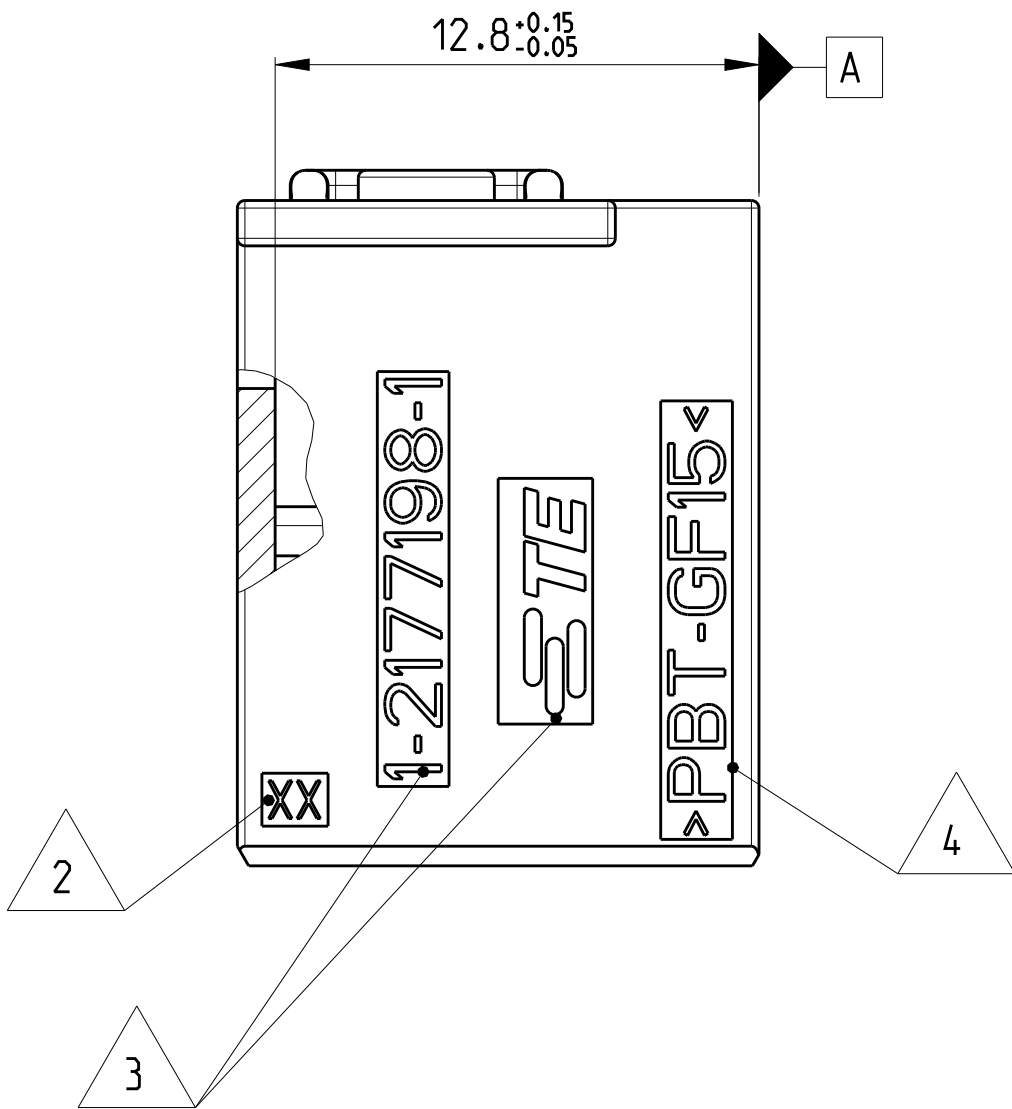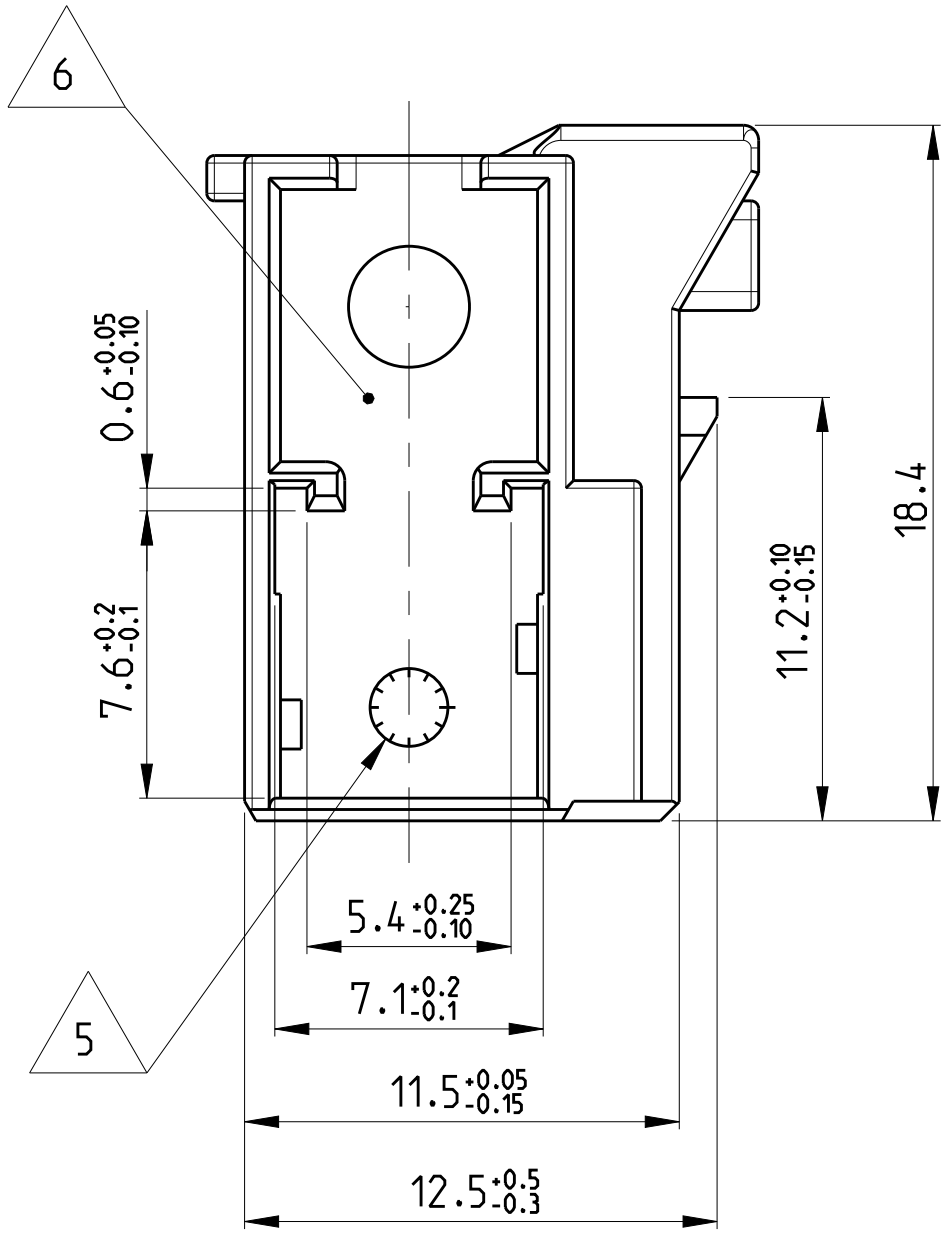







2:1



COVER, 10POS.	0.00119	Z	9-2177198-1	1	PBT-GF15	WATER BLUE SIMILAR RAL 5021
COVER, 10POS.	0.00121	E	5-2177198-1	1	PBT-GF15	GREEN SIMILAR RAL 6017
COVER, 10POS.	0.00122	D	4-2177198-1	1	PBT-GF15	VIOLET SIMILAR RAL 4004
COVER, 10POS.	0.00121	C	3-2177198-1	1	PBT-GF15	BLUE SIMILAR RAL 5012
COVER, 10POS.	0.00121	B	2-2177198-1	1	PBT-GF15	NATURE
COVER, 10POS.	0.00121	A	1-2177198-2	1	PBT-GF15	CURRY SIMILAR RAL 1027
COVER, 10POS.	0.00121	A	1-2177198-1	1	PBT-GF15	BLACK RAL 9011
DESCRIPTION	MASS [kg]	COD	TE ORDER NO.	REV.	MATERIAL	SURFACE/COLOUR


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. POLIZZI CHK M. BANAS APVD M. BANAS	05MAY2011 05FEB2013 14FEB2013	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ±0.15 1 PLC ±0.10 2 PLC ±0.10 3 PLC ±0.10 4 PLC ±0.10 ANGLES ±2°		PRODUCT SPEC 108-20319 APPLICATION SPEC		COVER, 10 POSITION MICRO QUADLOCK SYSTEM	
MATERIAL SEE TABLE		WEIGHT SEE TABLE		SIZE A1	
SEE TABLE		SEE TABLE		CAGE CODE 00779	
-		CUSTOMER DRAWING		DRAWING NO. C=2177198	
-		SCALE 5:1		SHEET 1 OF 2	
-		REV A2		RESTRICTED TO -	

CODINGS
3:1

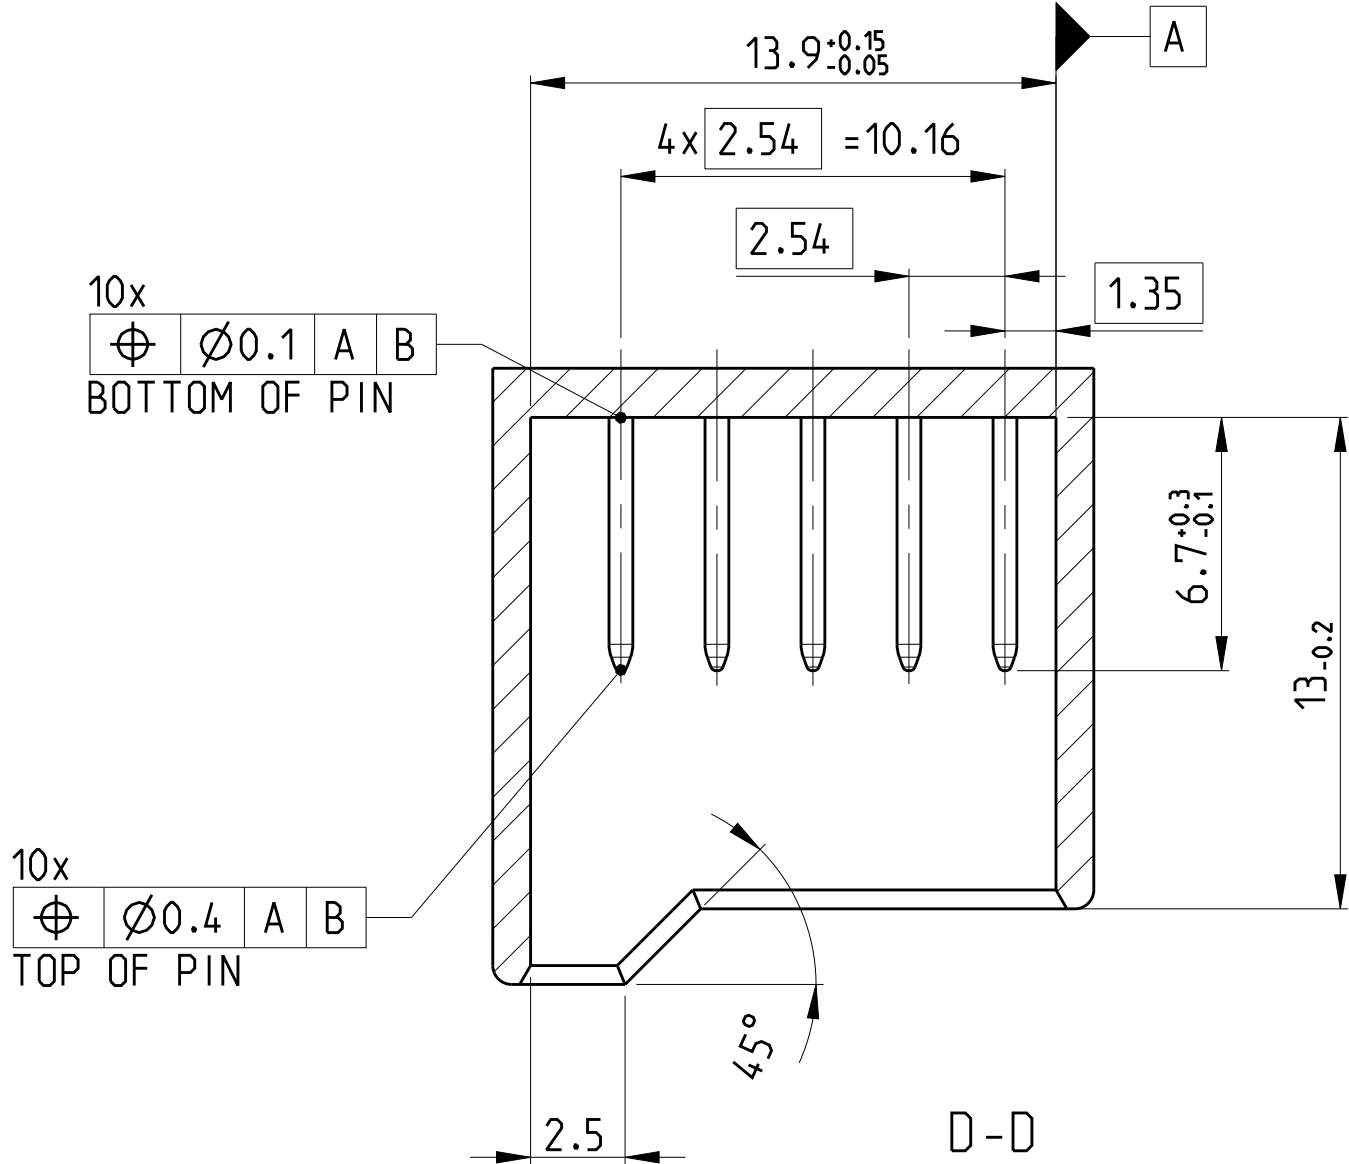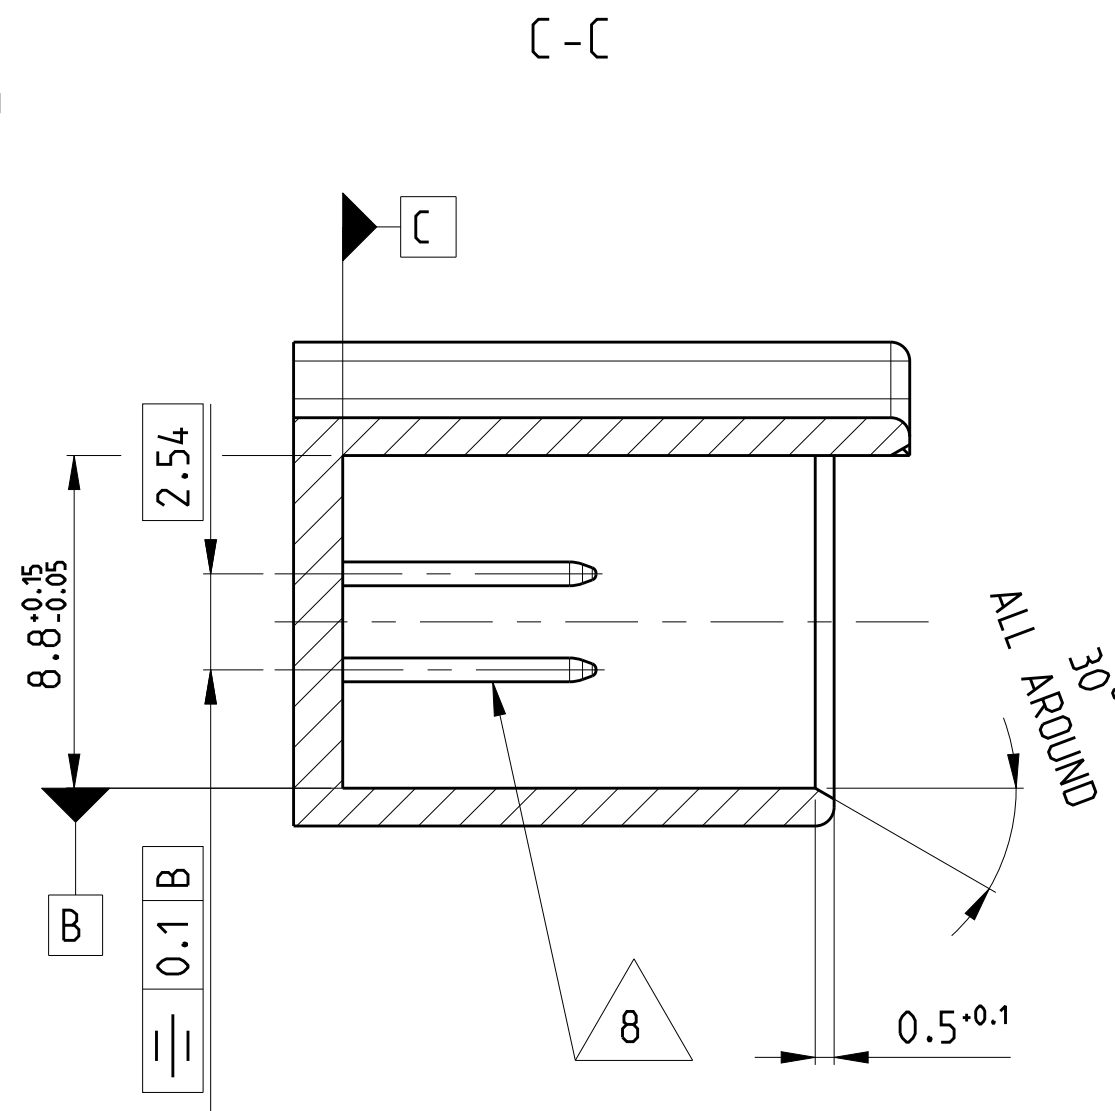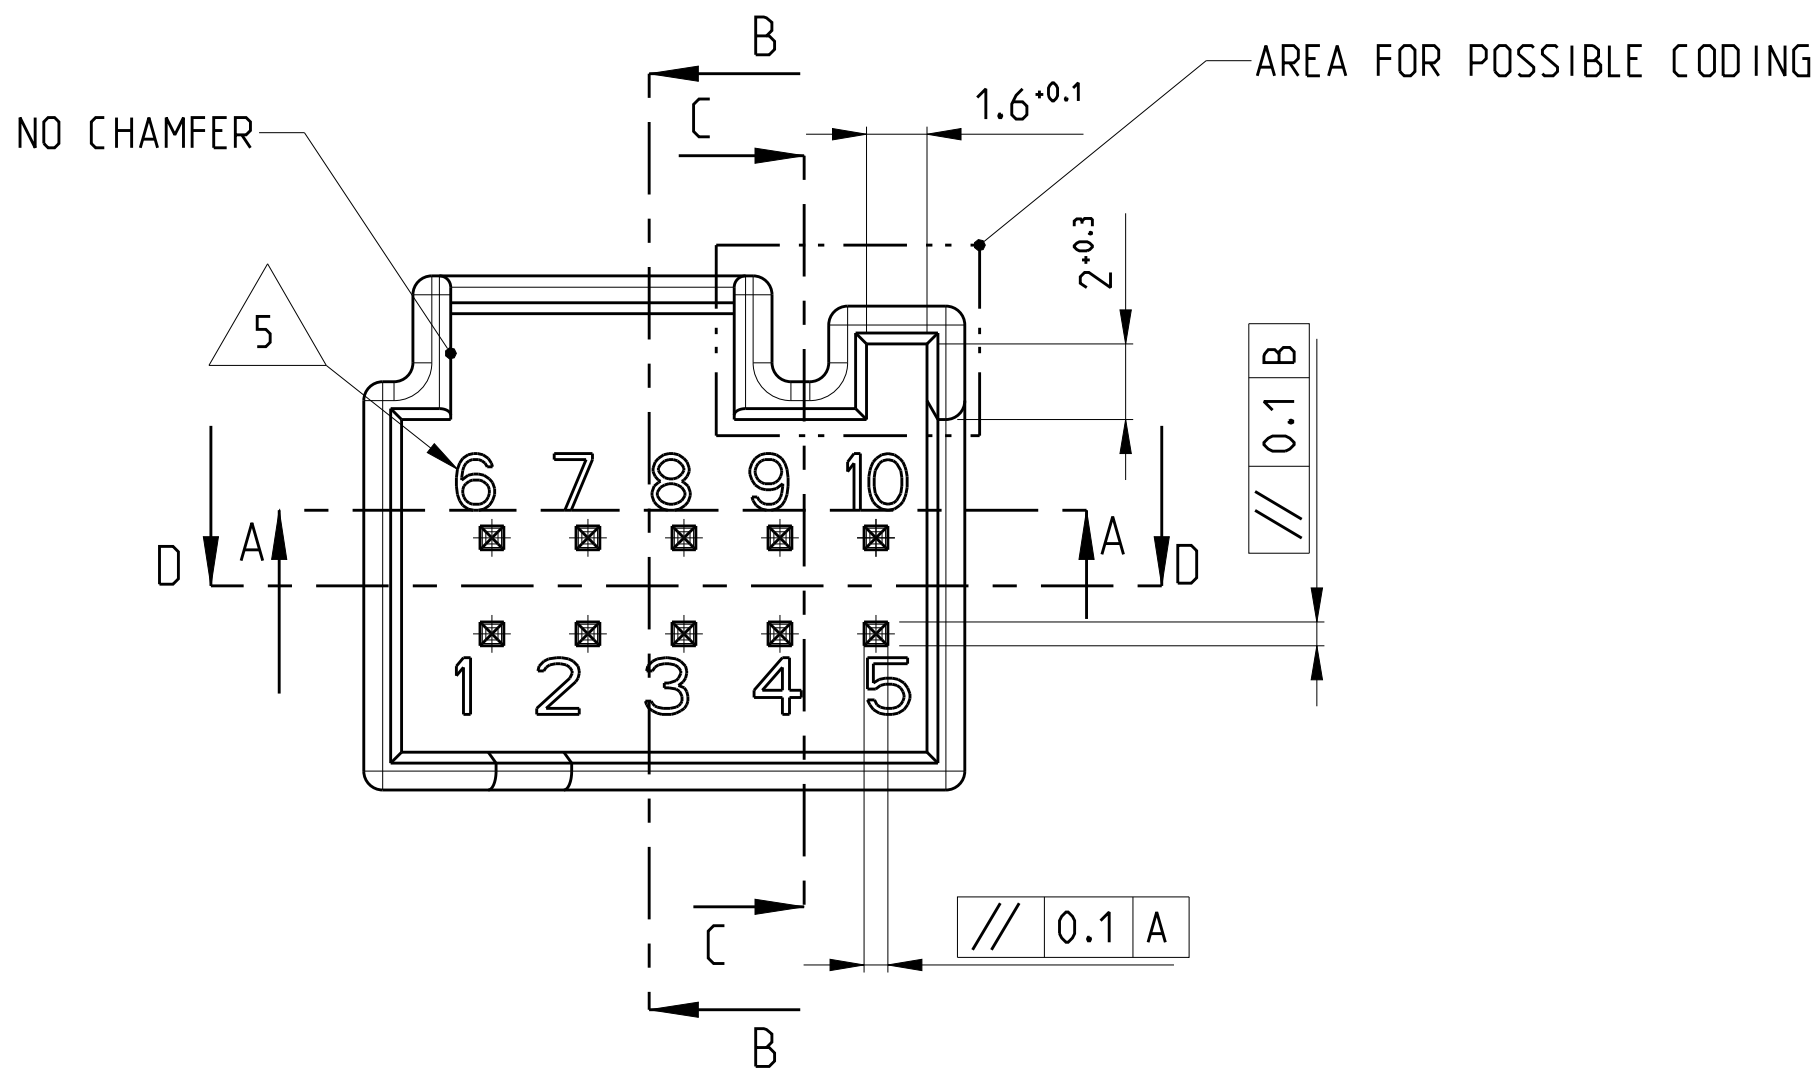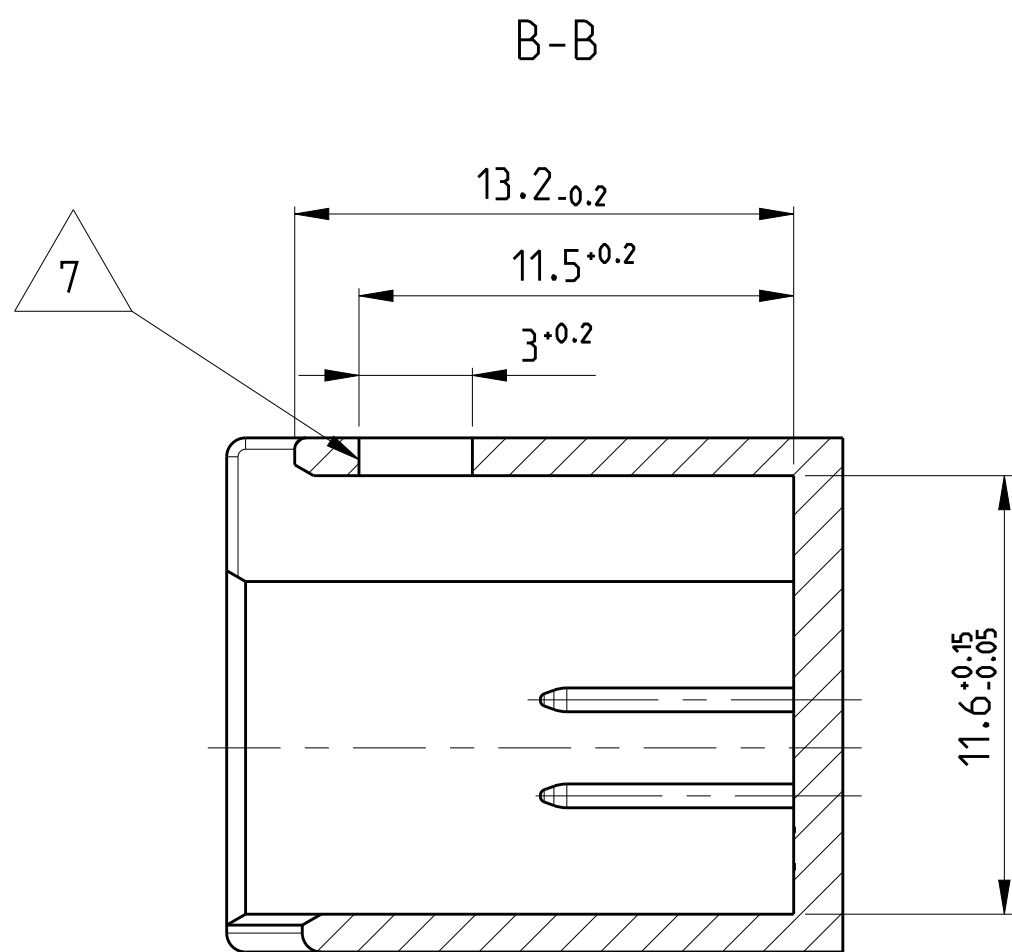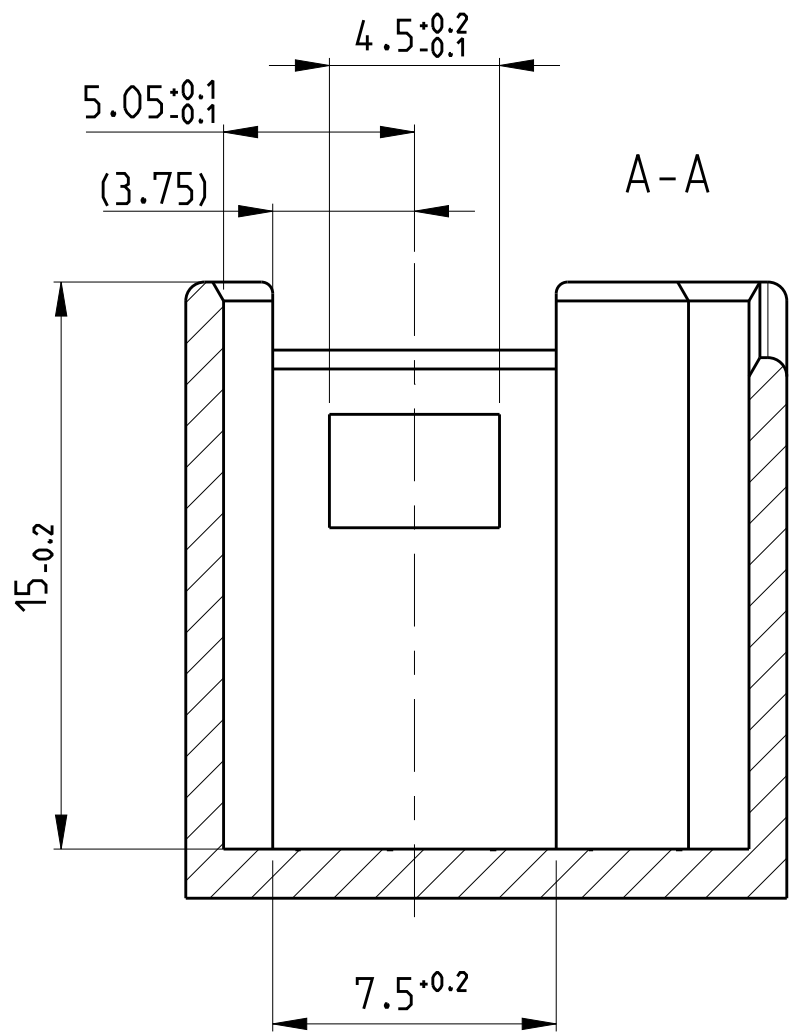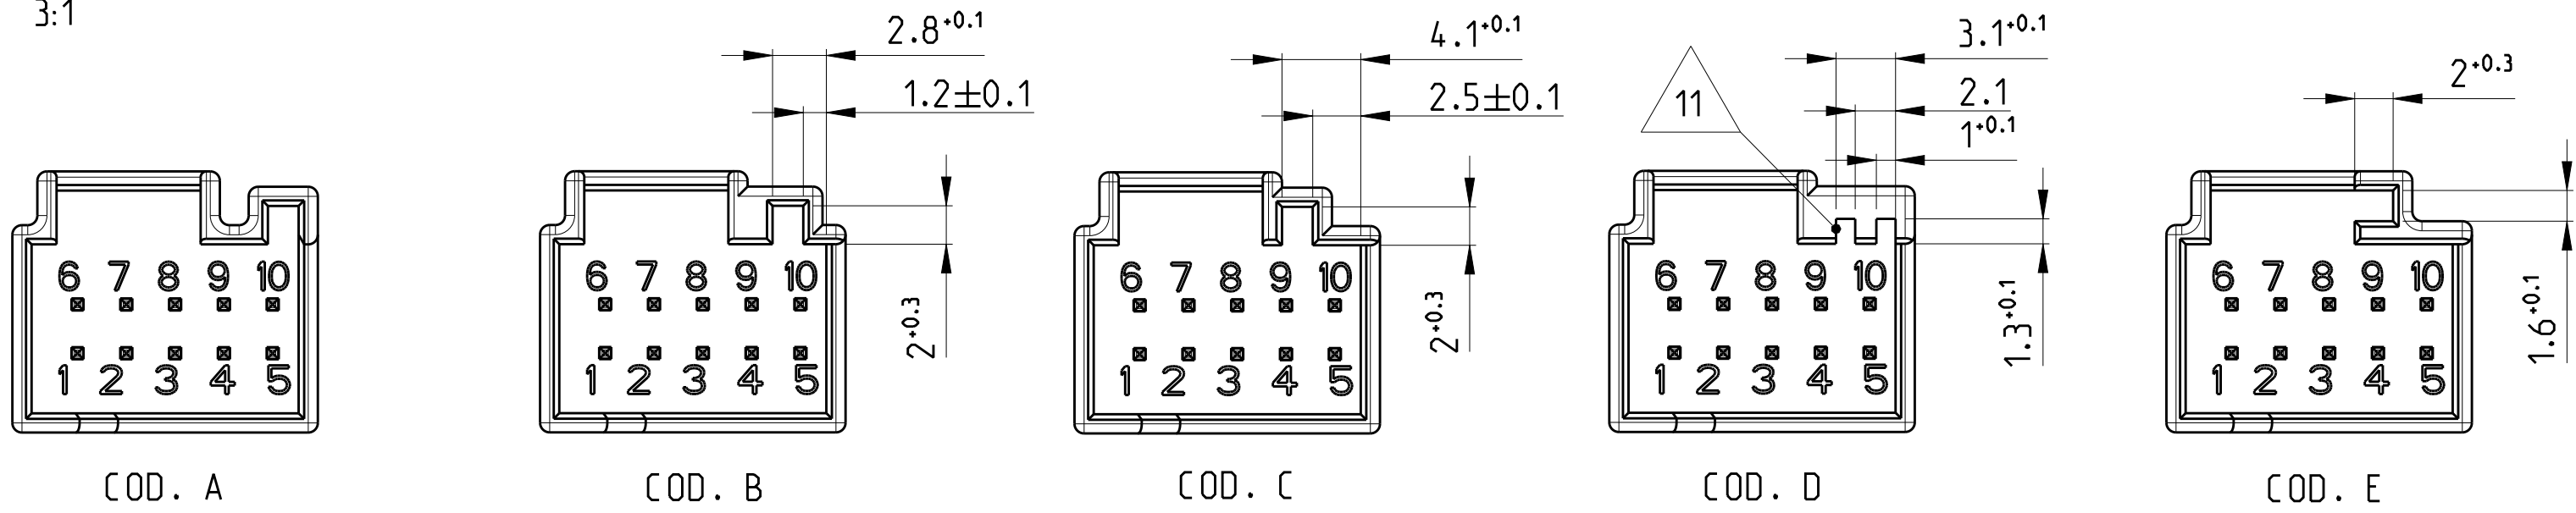

NOTES:

- CODING A AS SHOWN
- REFERENCES **A**, **B**, FOR CENTERLINE DEFINITION
1 mm ABOVE REFERENCE **C**
- ALL SYMMETRIC DIMENSIONS $\equiv 0.05 \text{ } \phi$
- NO SPECIFIED RADII R0.5 mm
- CAVITY MARKING, CHARACTERS DEEP
- NO SPECIFIED WALL THICKNESS MIN. 1 mm
- IN THIS AREA MAX. 0.03 mm BURRS PERMITTED
- SPECIFICATION OF CONTACT PIN No 114-18063
- HEADER MATERIAL: PBT-GF10
- COUNTERPART SUITABLE FOR 10 POSITIONS MQS SOCKET HOUSING TE PN 2177198
- CODING AREA WITHOUT CHAMFER

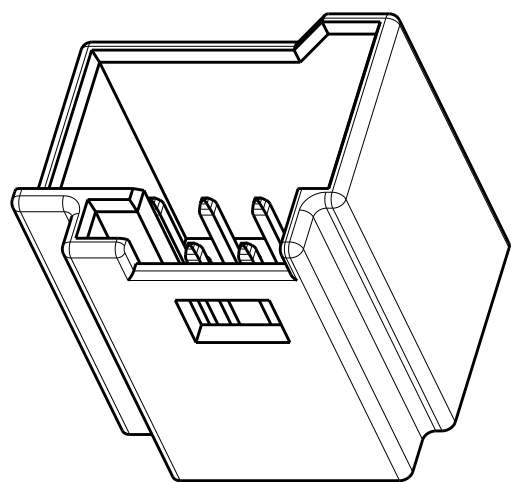

3:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN M. POLIZZI CHK M. BANAS APVD M. BANAS	05MAY2011 05FEB2013 14FEB2013	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ±0.15 1 PLC ±0.10 2 PLC ±0.10 3 PLC ±0.10 4 PLC ±0.10 ANGLES ±2°		PRODUCT SPEC 108-20319 APPLICATION SPEC		COVER, 10 POSITION MICRO QUADLOCK SYSTEM	
MATERIAL 8 9		SEE TABLE		SIZE A1	
CUSTOMER DRAWING		WEIGHT SEE TABLE		SCALE 5:1	
		SHEET 2		OF 2	
				REV A2	