









Heyco® Snap-In Cordgrip Strain Reliefs – Pigtail™



The Ultimate in Snap-In Strain Relief Protection

For Panels from .062" (1,6 mm) to .125" (3,2 mm) Thick

WILL FIT THESE CABLES				PART NO.	DESCRIPTION	 or 	PANEL DIMENSIONS				C Max O.A. Length		Mounting Hole Plug
Minimum Diameter		Maximum Diameter					A Mounting Hole	B To Prevent Rotation					
in.	mm.	in.	mm.	Black				in.	mm.	in.	mm.	in.	mm.
.065	1,7	.220	5,6	M4902	RSCG 500-7		.500	12,7	.450	11,4	2.50	63,5	2491
.115	2,9	.250	6,4	M4900	SCG 500-7								
.065	1,7	.187	4,8	M4908	RSCG 625-7		.625	15,9	.550	14,0	2.83	71,9	2497
.105	2,7	.312	7,9	M4906	SCG 625-7								
.069	1,8	.250	6,4	M4914	RSCG 750-7		.750	19,1	.660	16,8	3.46	87,9	2503
.230	5,8	.395	10,0	M4912	SCG 750-7								
.095	2,4	.260	6,6	M4920	RSCG 875-7		.875	22,2	.770	19,6	3.86	98,0	2509
.170	4,3	.450	11,4	M4918	SCG 875-7								
.180	4,6	.440	11,2	M4926	RSCG 1000-7		1.000	25,4	.875	22,2	4.31	109,5	2713*
.260	6,6	.546	13,9	M4924	SCG 1000-7								
.250	6,4	.485	12,3	M4932	RSCG 1093-7		1.093	27,8	.970	24,6	4.90	124,5	2727
.485	12,3	.709	18,0	M4930	SCG 1093-7								

Standard color black.

*For round Mounting Hole only. For DD Mounting Hole Plug, consult Heyco.

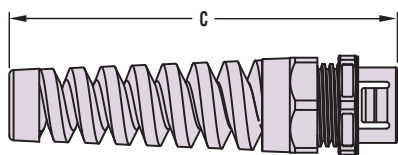

SUGGESTED CLEARANCE HOLE FOR NONTHEADED MOUNTING



- **Integral nylon spring eases the cable into a lazy bend; prevents kinking and assures longest cable and product life.**
- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Smooth, rounded interior edges for ease of installation.
- Limited intrusion into enclosure where access is tight.
- Rotation prevented when used in Double D mounting holes.
- Easy to install—no tools required.
- Ratchet design of sealing nut assembly provides superior anti-vibration and ensures a firm grip on the cable.
- Available in multiple sizes for cable diameters ranging from .065" (1,7 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Meet UL strain relief requirements without kinking the cable.
- For Foam Washers, see page 2-15.
- Though similar in appearance and function to Heyco-Tite Liquid Tight Cordgrips, Snap-in Cordgrip Strain Reliefs may not be liquid tight at the panel interface. For our complete range of **Liquid Tight** Cordgrips with Integral Sealing Ring, see Section 3.
- Use Heyco **Mounting Hole Plugs** for DD Mounting Holes, or **Heyco Dome Plugs** for round Mounting Holes, to fill blank/unused Mounting Holes and thus allow for a single panel design across multiple applications. See section 6.

Material
Certifications

Nylon 6/6 w/Buna N Sealing Gland
 Recognized under Underwriters' Laboratories File E51579
 Certified by Canadian Standards Association File 093876
 94V-2
 -22°F (-30°C) to 212°F (100°C)

Flammability Rating
Temperature Rating

Quick Specs