
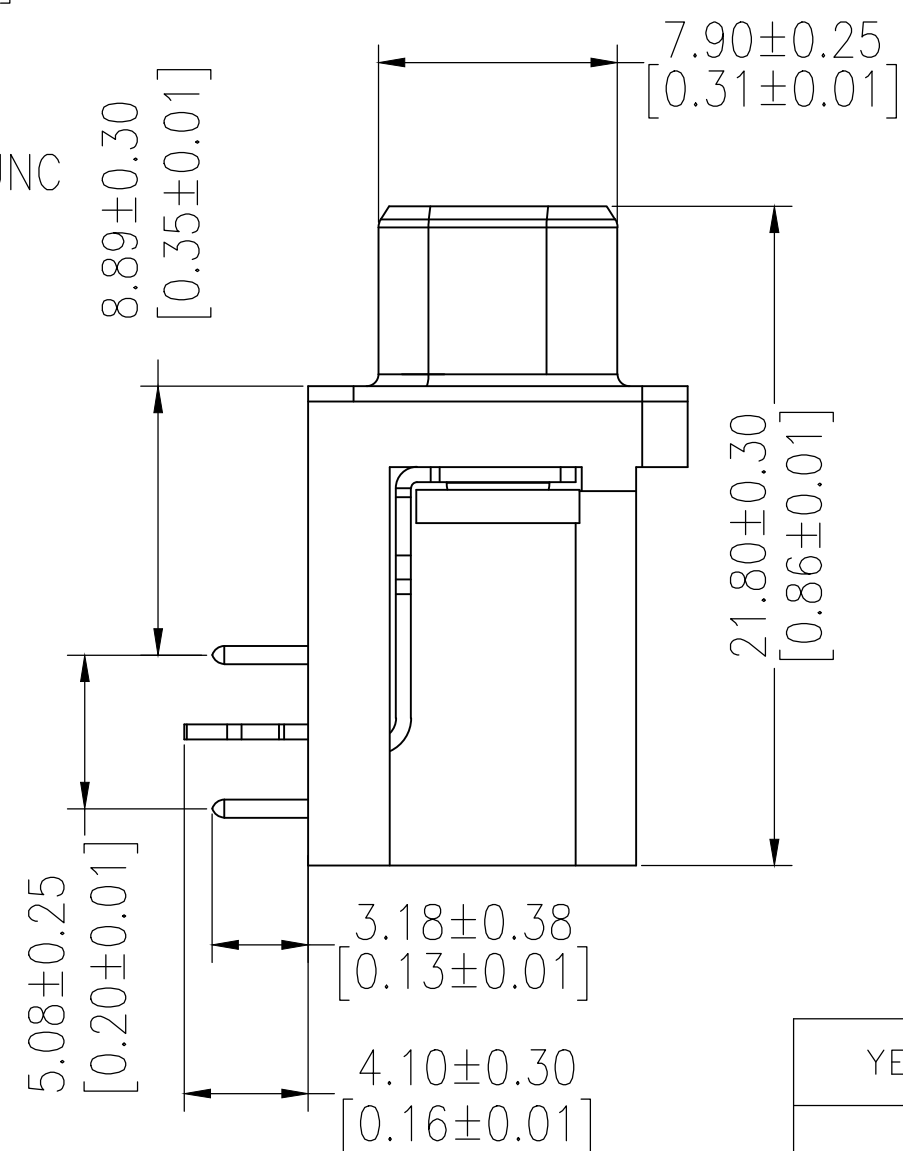
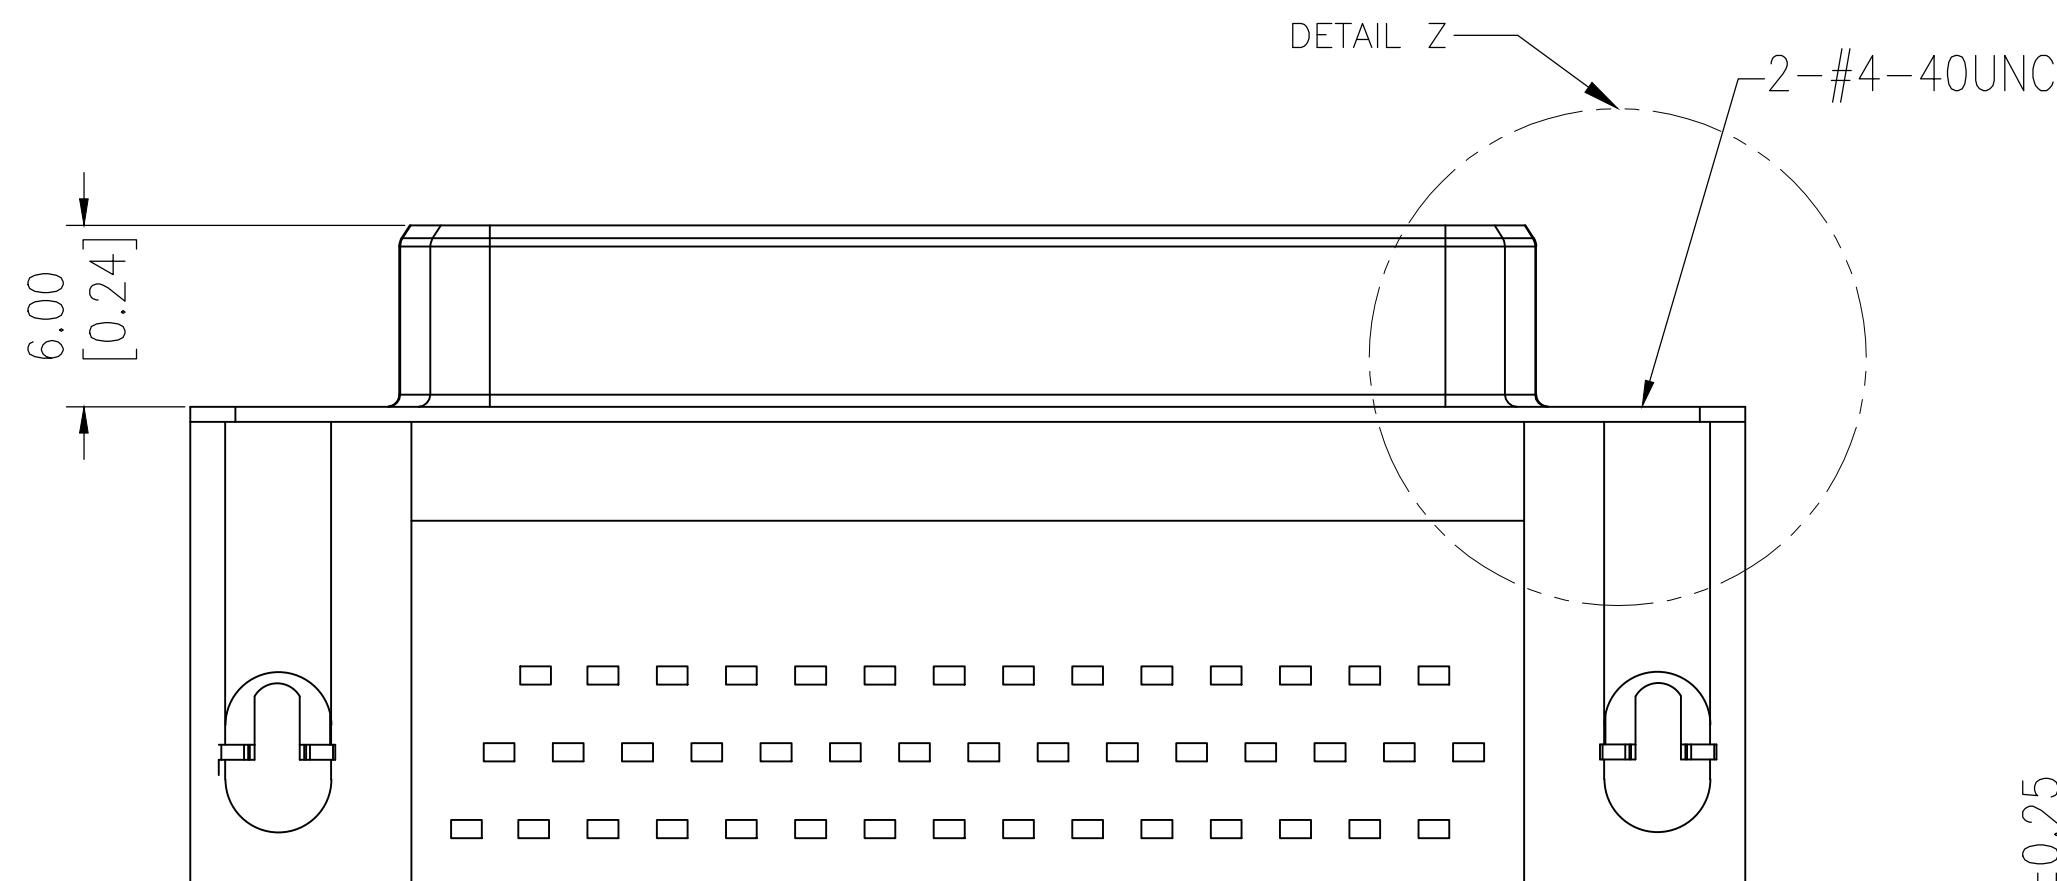


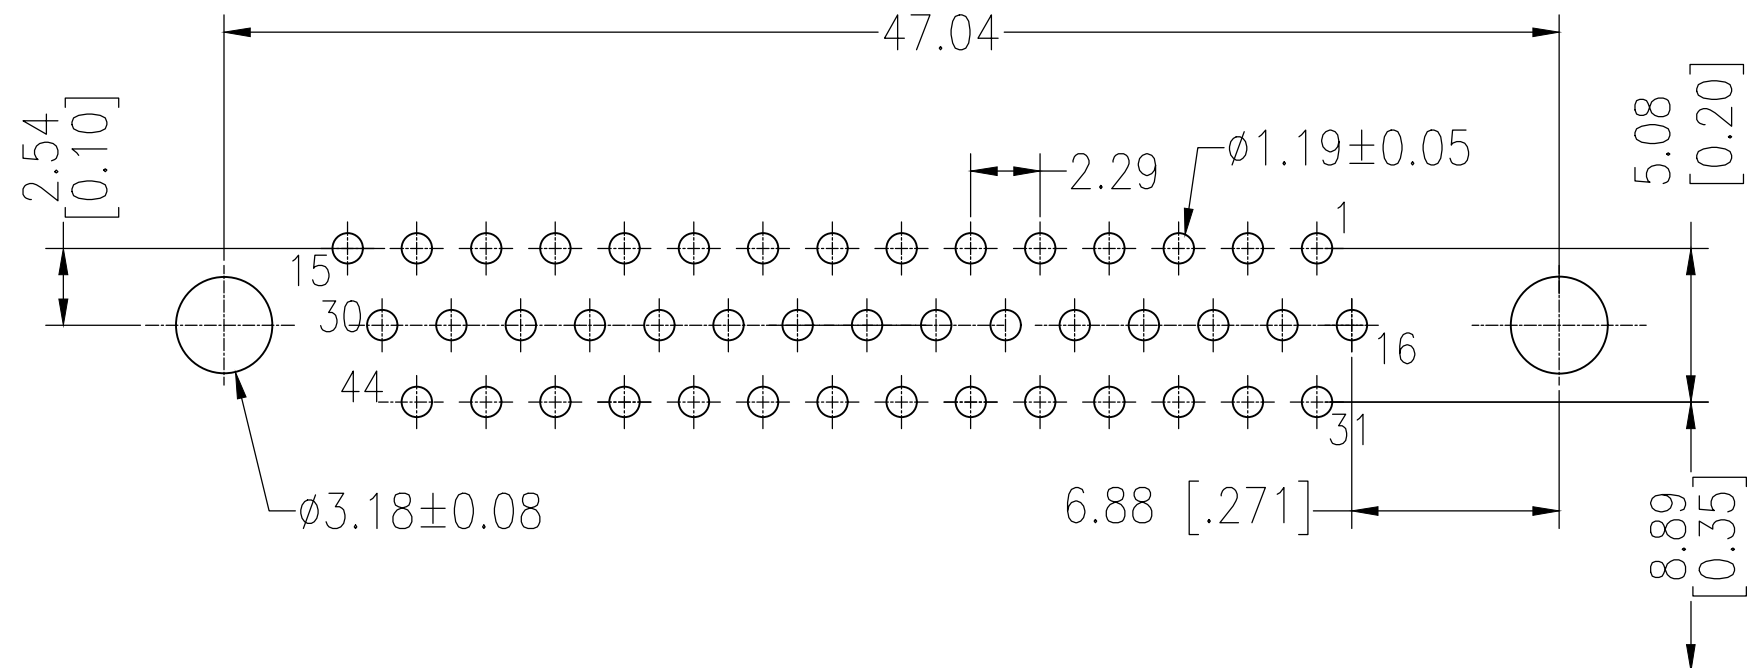

NOTES:

Insulator:PBI+G.F UL94V-O BLACK
Contact:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATED OVERALL
HOLD DOWNS:Brass,100u" TIN OVER 50u" NICKEL
Sheet: Cold Roller Steel, Ni Plated
Rivetlock:Brass,Nickel Plated

LOT NUMBER "XXXX"

└┐ Stands For Calendar Year
└┐ Stands For Week Number

YES SEE DETAIL Z	15μ"Au	2311770-2
THREADED	30μ"Au	2311770-1
SCREW LOCK	Contact Area	P/N
	Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 13MAR2017 AJITH PAI CHK 13MAR2017 DANIEL GORENC APVD 13MAR2017 DANIEL GORENC		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME AMPLIMITE RECEPTACLE, HD22, RIGHT ANGLE, 44P			
		PRODUCT SPEC 108-130023 APPLICATION SPEC -		SIZE A2		CAGE CODE 00779	
MATERIAL -		FINISH -		DRAWING NO G-2311770		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 1:1		SHEET 1 OF 1	
						REV E	

2-#4-40UNC

6.00
[0.24]

DETAIL Z