


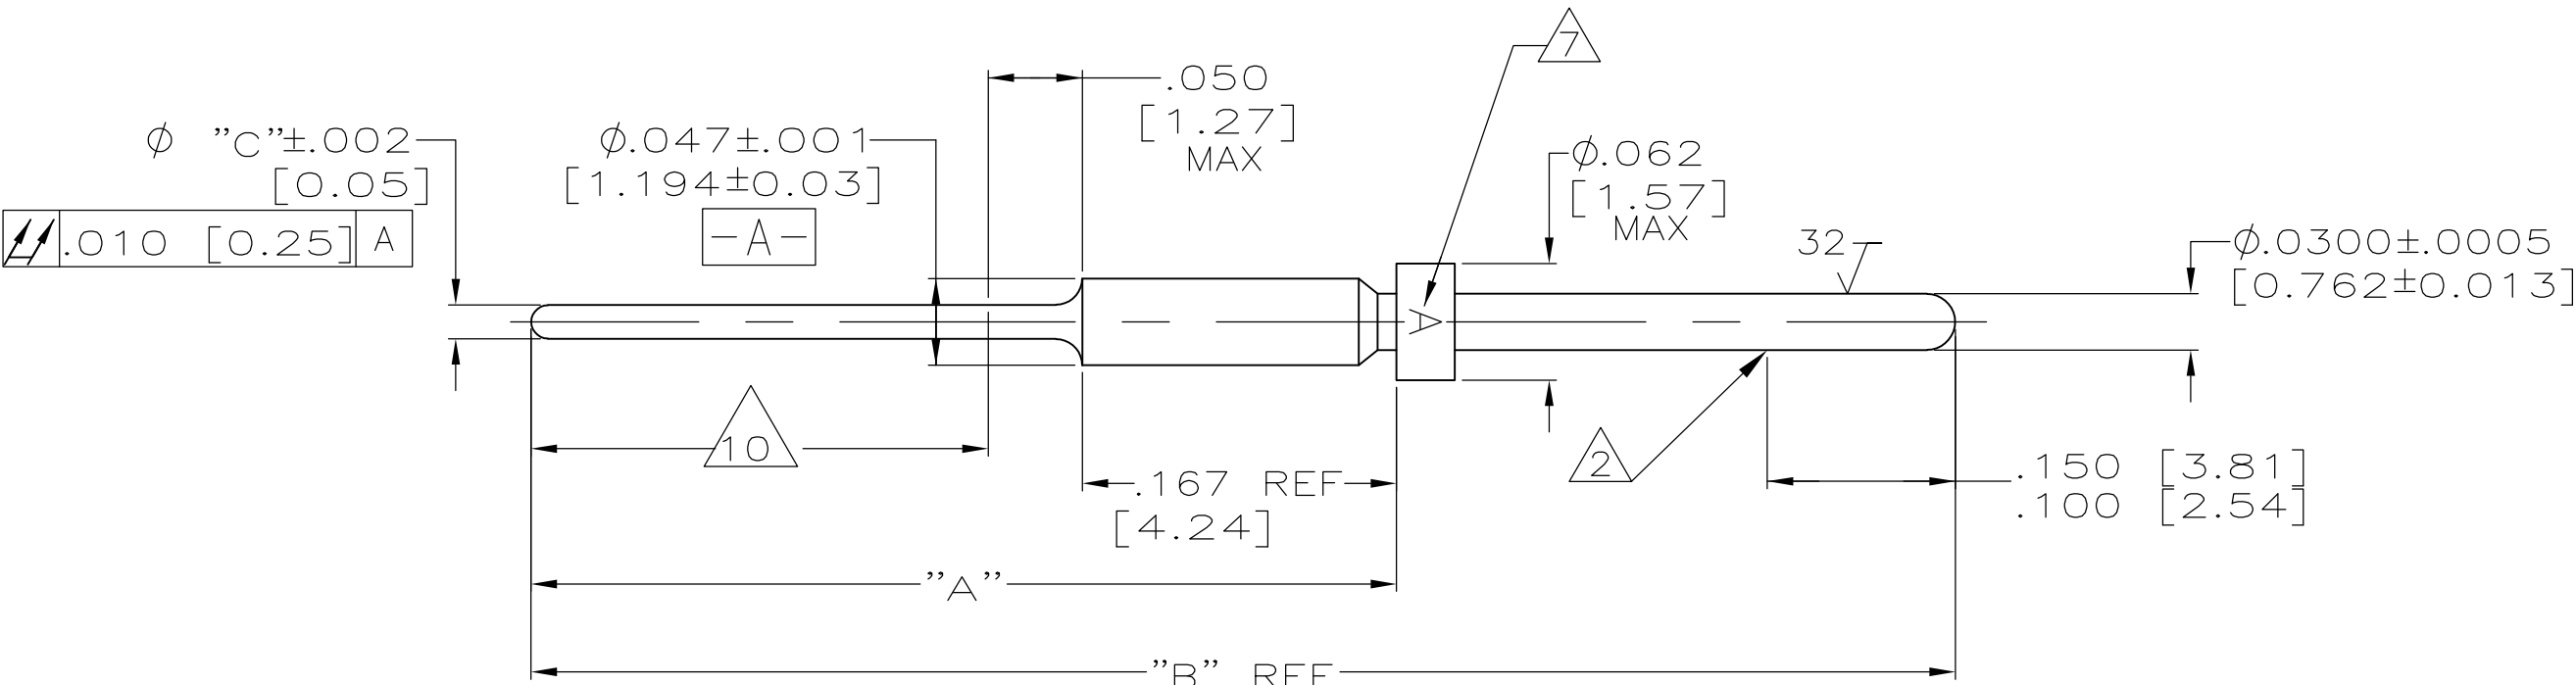

1. INSERTION/EXTRACTION TOOL AMP P/N 91067-1.
2. POINT OF PLATING THICKNESS MEASUREMENT.
3. FINISH: .000050 [0.00127] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000100 [0.00254] TO .000150 [0.00381] THK COPPER PER MIL-C-14550, CLASS IV.
4. FINISH: .000050 [0.00127] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000050 [0.00127] TO .000150 [0.00381] THK NICKEL PER QQ-N-290.
5. FINISH: .000050 [0.00127] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000200 [0.00508] TO .000250 [0.00635] THK NICKEL PER QQ-N-290.
6. CONTACTS MEET ALL APPLICABLE PERFORMANCE REQUIREMENTS OF MIL-C-39029.
7. GOTHIC "A" LOCATED APPROX AS SHOWN.
8. CONTACT BODY MAT'L: LEADED NICKEL COPPER (PROPRIETARY) EQUIVALENT ALTERNATE MAT'L: COPPER ALLOY PER ASTM-B-197
9. FINISH: .000100 [0.00254] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000050 [0.00127] TO .000150 [0.00381] THK NICKEL PER QQ-N-290.
10. SOLDER DIP WITH 63/73 TIN-LEAD. MUST MEET SOLDERABILITY REQUIREMENT OF MIL-STD-202, METHOD 208.

PRELIMINARY NOT RELEASED FOR PROD.	3	.018 [0.46]	.735 [18.67]	.435 [11.05]	2-207683-7
	4	.018 [0.46]	.642 [16.31]	.345 [8.76]	2-207683-3
	9	.018 [0.46]	.707 [17.96]	.410 [10.41]	2-207683-1
	3	.018 [0.46]	.707 [17.96]	.410 [10.41]	2-207683-0
PRELIMINARY NOT RELEASED FOR PROD.	3	.018 [0.46]	.665 [16.89]	.368 [9.35]	1-207683-8
	3 10	.018 [0.46]	.760 [19.30]	.460 [11.68]	1-207683-4
	3 10	.018 [0.46]	.860 [21.84]	.560 [14.22]	1-207683-3
	3	.025 [0.64]	.860 [21.84]	.560 [14.22]	1-207683-2
	5	.018 [0.46]	.760 [19.30]	.460 [11.68]	1-207683-1
	4	.018 [0.46]	1.107 [28.12]	.810 [20.57]	207683-9
	4	.025 [0.64]	.860 [21.84]	.560 [14.22]	207683-8
	3	.018 [0.46]	.760 [19.30]	.460 [11.68]	207683-6
	3	.018 [0.46]	1.107 [28.12]	.810 [20.57]	207683-4
	3	.018 [0.46]	.860 [21.84]	.560 [14.22]	207683-2
	FINISH	ϕ "C"	"B"	"A"	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES [mm]

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005 [0.13]
4 PLC ± -
ANGLES ± -
FINISH -

DWN
T. ALEXANDER
CHK
F. KINSEY
APVD
F. KINSEY
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

11-11-91
11-19-91
11-19-91

NAME
PIN CONTACT, POSTED
SIZE 22D
-

SIZE
A2
CAGE CODE
00779
DRAWING NO
C=207683
SCALE
10:1
SHEET
1 of 1
REV
Z

RESTRICTED TO
-

TE Connectivity

TE Connectivity

1471-9 (3/11)