## Miscellaneous Suppression Cores (2643167851)



Part Number: 2643167851

43 FULL FLAT CABLE CORE

## **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade


Fair- Rite has tooled several special core geometries in the 43 & 77 material for suppression of conducted EMI.

☐ For any non- catalog suppression core design feel free to contact our customer service or application group for feasibility and availability.

The "C" dimension, the core length, can be modified to suit specific applications.

## Weight: 85 (g)

Dim	mm	mm tol	nominal inch	inch misc.		
A	38.85	±0.75	1.53			
В	26.15	±0.75	1.03	_		
C	28.6	±0.70	1.125			
D	26	±0.60	1.025			
Е	12.95	±0.25	0.51			




## **Chart Legend**

- + Test frequency
- •Figures 3 & 4 tested in pairs

Typical Impedance	$(\Omega)$
10 MHz	60
25 MHz <sup>+</sup>	94
100 MHz <sup>+</sup>	169
250 MHz	250

These suppression cores are controlled for impedance only. The minimum impedance is typically the listed impedance less 20%. Single turns tests are performed on the 4193A Vector Impedance Analyzer with the shortest practical wire length.

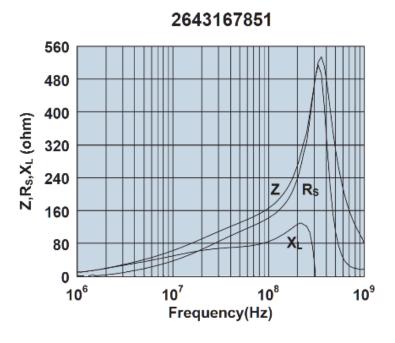

Impedance, reactance, and resistance vs. frequency.

Fair- Rite Products Corp. One Commercial Row, Wallkill, New York 12589-0288

888-324-7748

845-895-2055

Fax: 845-895-2629 • ferrites@fair- rite.com

www.fair- rite.com