Alle Rechte vorbehalten/ *All rights reserved*

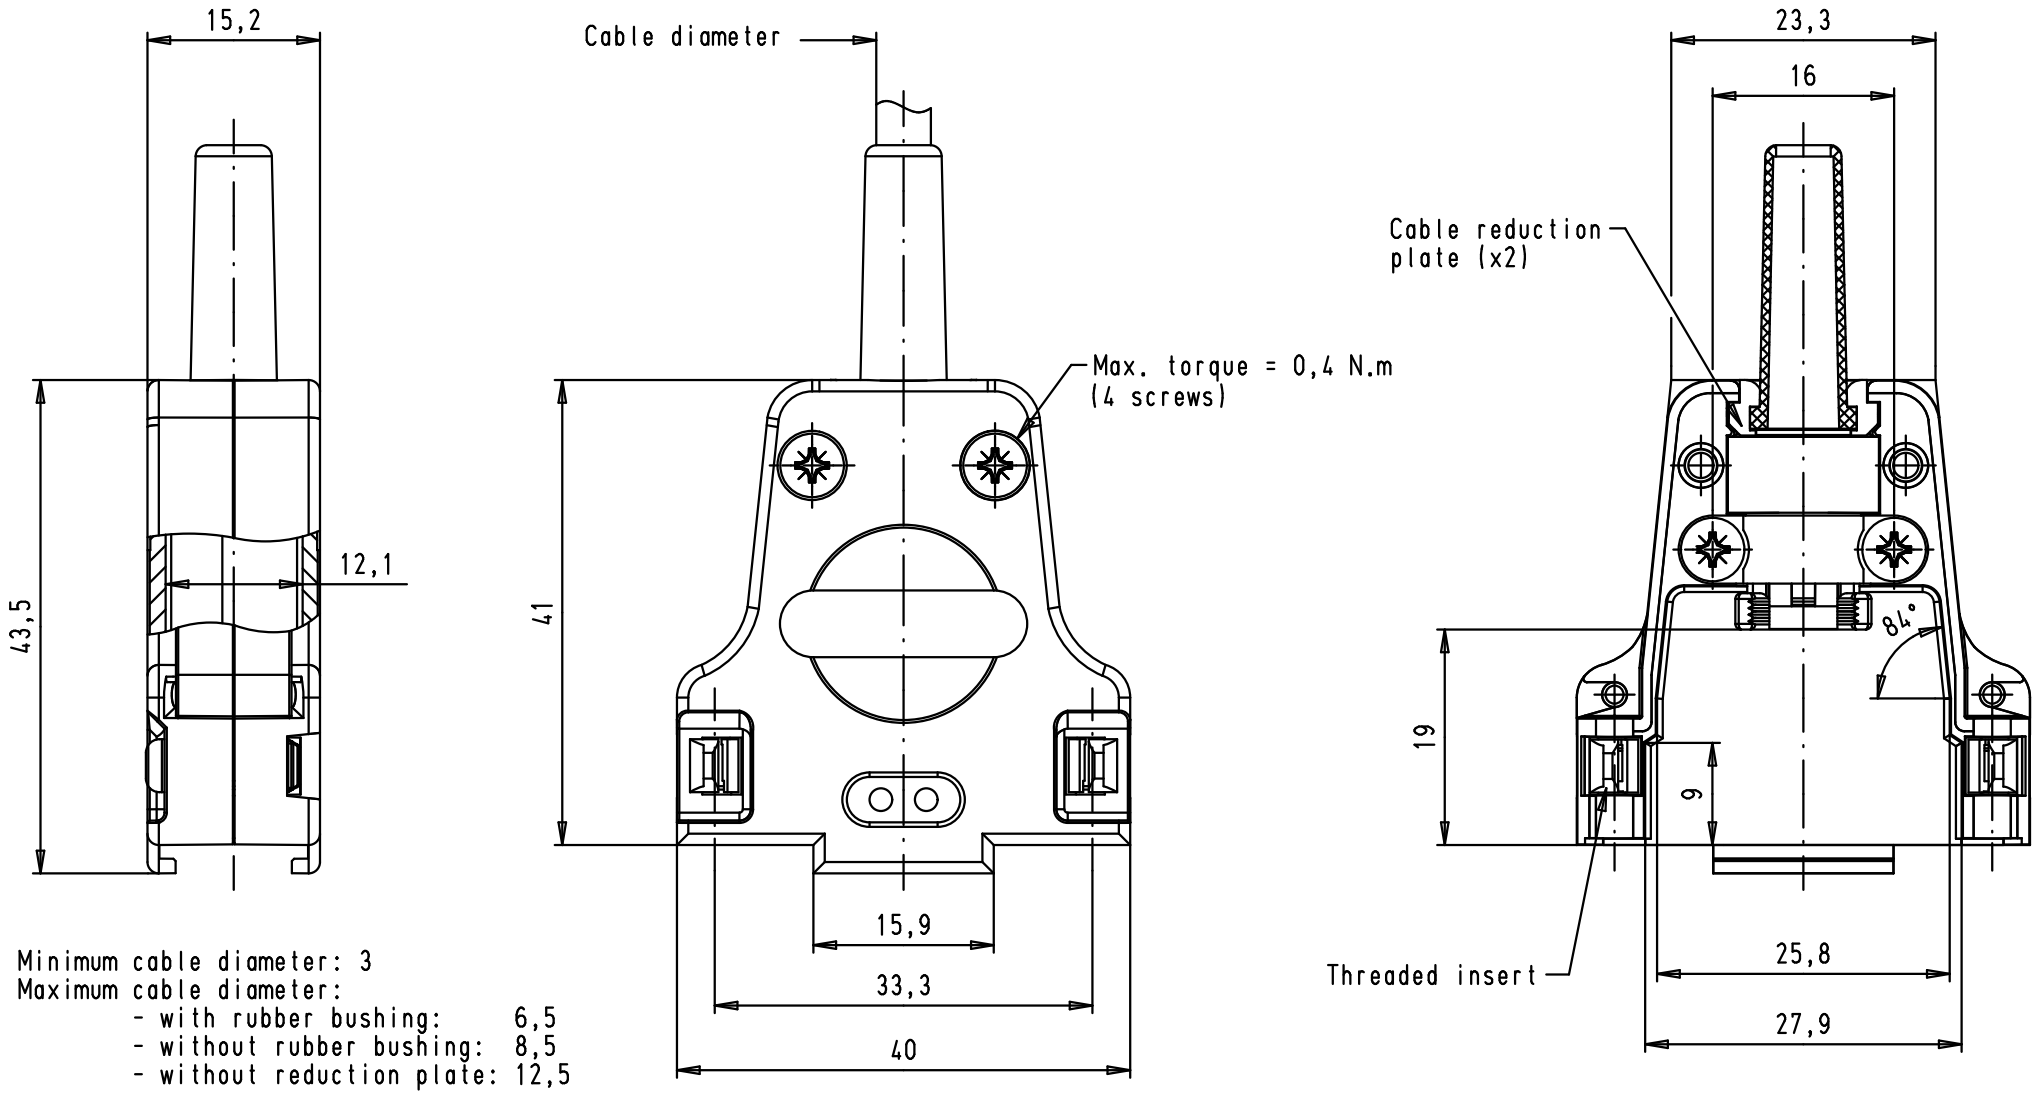

Minimum cable diameter: 3
Maximum cable diameter:
- with rubber bushing: 6,5
- without rubber bushing: 8,5
- without reduction plate: 12,5

				Dat.	Name
			Detail.	27/06/08	PK
			Insp.		
			Stand.		

All Dim. in mm
Orig. Size DIN A 4

D-Sub, 15 poles, top entry, straight metal hood with threaded inserts, for cable to cable application with latching

Maßstab/ *Scale* 1,5:1

Mod.	Dat.	Name
EC00368	07/07/09	PK
35063	27/06/08	PK

HARTING EURL
F-95972 Paris

TB 09 67 015 032X

Sub.

Blatt/ *Page* 1/1

Part number	Threaded insert
09 67 015 0322	4-40 UNC
09 67 015 0323	M3