
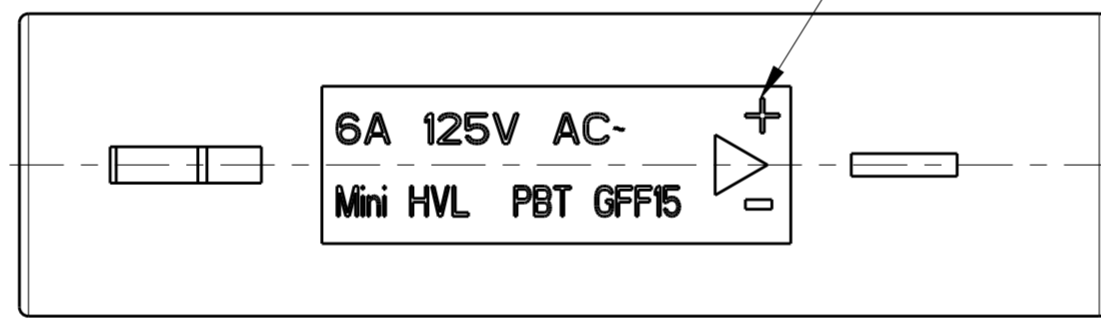
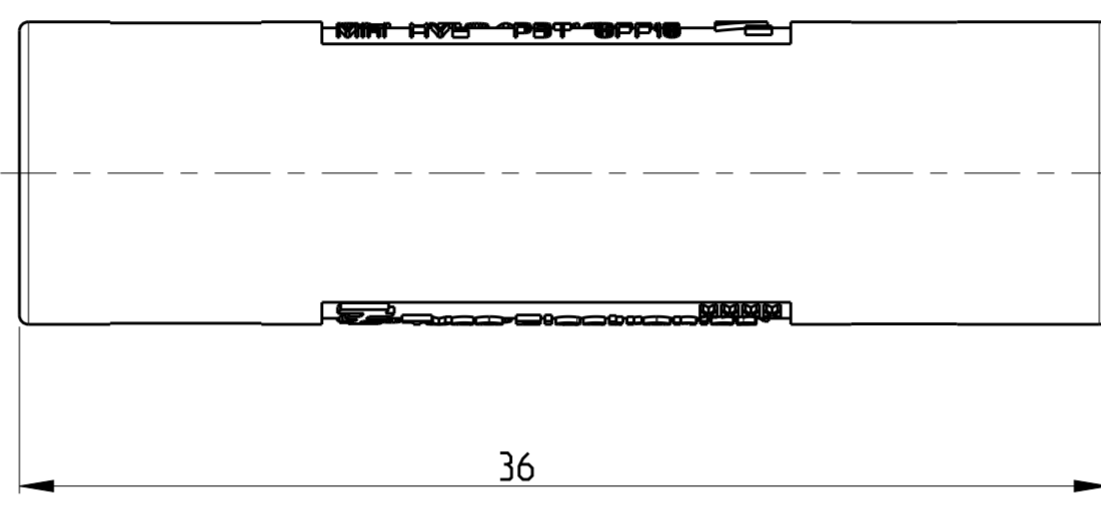
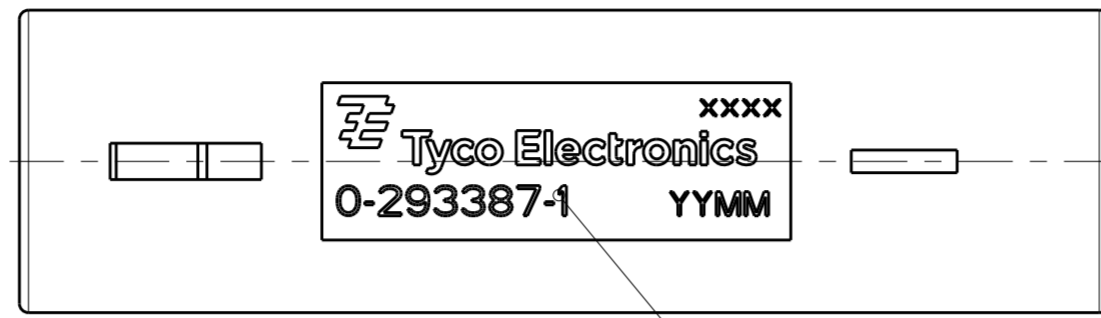



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECR-13-003447	11MAR2013	RS	DD
	E	REVISED PER ECR-16-005692	02JUN2016	RS	JL
	F	REVISED PER ECR-16-017348	24FEB2017	RK	JL

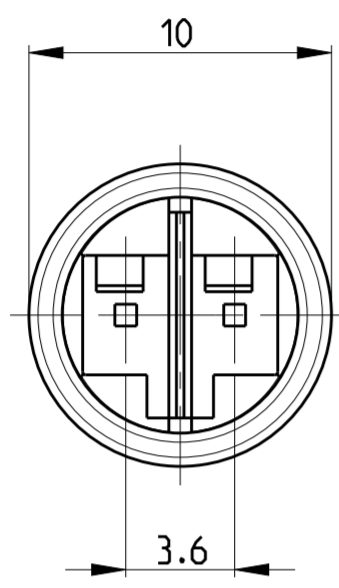

- Remarks:
1. cavities designed for MQS pin contact PN 1740335-x
 2. Counterpart is Plug PN 293388-x
- 3 Polarity marking +/- permanent / usable for DC version
 - 4 PN specific marking
 - 5 PBT 15GF, UL 94 V0 WHITE COLOR

P/N 293387-1 AS SHOWN

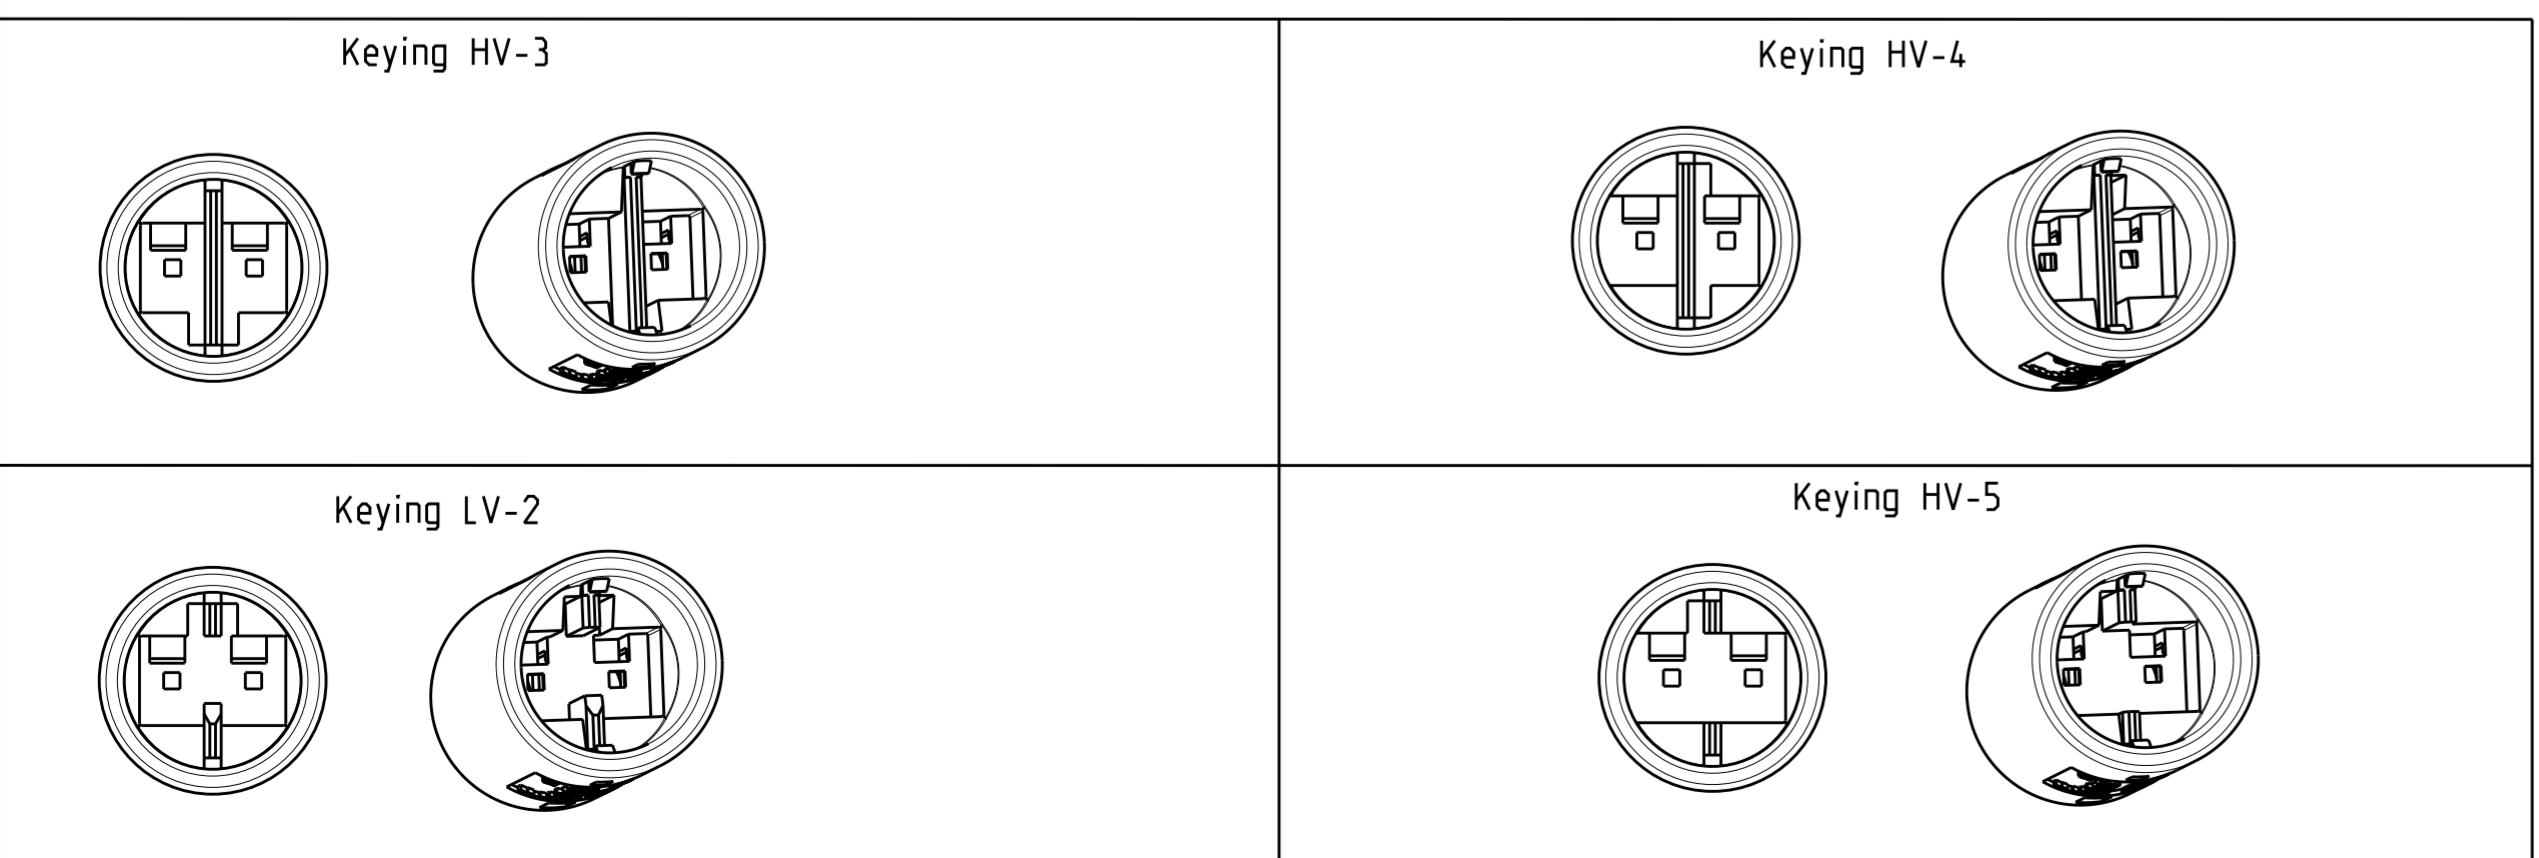

	LV-2	WHITE	5	LOW-VOLTAGE 125VAC/VDC	7A/125VAC/VDC =	293387-4
	HV-5	WHITE	5	HIGH-VOLTAGE 125V AC	6A/125V AC~	293387-3
	HV-4	WHITE	5	HIGH-VOLTAGE 125V AC	6A/125V AC~	293387-2
	HV-3	WHITE	5	HIGH-VOLTAGE 125V AC	6A/125V AC~	293387-1
Note	Keying	COLOR/MATERIAL	REMARKS	Marking 4	PN	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN A. Vecchia 12FEB2009	<p>TE Connectivity</p> <p>NECTOR S Lighting System Outlet</p>
MATERIAL	FINISH	CHK G. Turco 12FEB2009	
		APVD G. Turco 12FEB2009	
<p>0 PLC ±</p> <p>1 PLC ±0.2</p> <p>2 PLC ±0.13</p> <p>3 PLC ±0.013</p> <p>4 PLC ±0.0001</p> <p>ANGLES ±</p>		PRODUCT SPEC	NAME
<p>5</p>		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		WEIGHT 2.2g	A2 00779 C-293387
		CUSTOMER DRAWING	SCALE 3:1 SHEET 1 OF 1 REV F