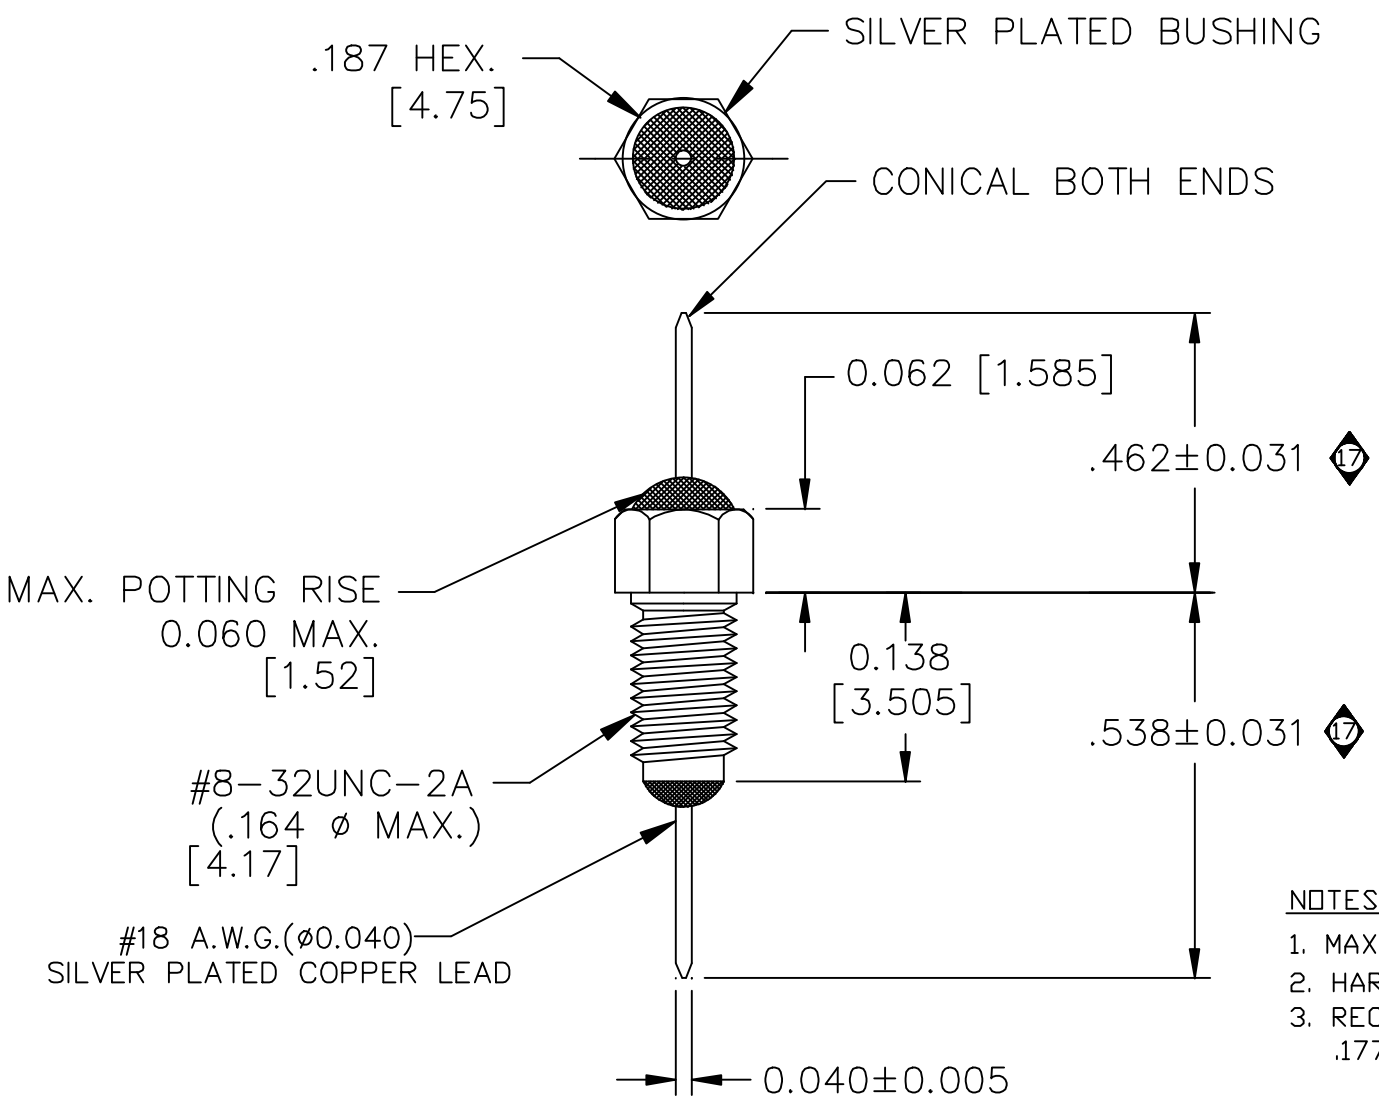


| | |
|---|---|
| CAPACITANCE | 1000pF +200% |
| TEMP. RANGE | -25°C TO +85°C |
| CURRENT | 15 AMP MAX. |
| WORKING VOLTAGE | 85°C 100 VDC |
| DC RESISTANCE | .01 Ohms MAX. |
| I.L.= NO LOAD | |
| 25MHz | 10dB |
| 100MHz | 20dB |
| 500MHz | 50dB |
| 1GHz | 55dB |

SCHEMATIC

MARKING:

PART: S619-1
BAG:
PACK: SCI 859619-1
DATE CODE
LOT No.
QTY/BAG
(200/BAG MAX.)

NOTES:

1. MAX. INSTALLATION TORQUE = 4in-lbs.
2. HARDWARE IS NOT INCLUDED.
3. RECOMMENDED MOUNTING:
   .177±.002 [4.50±1.05] DIA HOLE

| REV. NO. | CHANGE NOTICE |
|---|---|
| 17 | CN 201159 |
| 16 | CN 200774 REDRAWN |
| 15 | CN 199654 |
| 14 | CN 196800 |
| 13 | CN 196424 |
| 12 | CN 194321 REDRAWN |
| 0 | CN 193458 |

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx± .010
Angles ±0° 30′
CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.

ERIE, FAIRVIEW PENNSYLVANIA

Dwn. KRDZALIC
Ckd. 4/18/01
Apvd.
Scale NONE

Description
FLTR, SING, Pi, BSHG

859619-1