



## Main

|                               |                                                                                            |
|-------------------------------|--------------------------------------------------------------------------------------------|
| Range of product              | OsiSense XC                                                                                |
| Series name                   | Standard format                                                                            |
| Product or component type     | Limit switch                                                                               |
| Device short name             | XCKN                                                                                       |
| Sensor design                 | Compact                                                                                    |
| Body type                     | Fixed                                                                                      |
| Head type                     | Plunger head                                                                               |
| Material                      | Plastic                                                                                    |
| Body material                 | Plastic                                                                                    |
| Head material                 | Plastic                                                                                    |
| Fixing mode                   | By the body                                                                                |
| Movement of operating head    | Linear                                                                                     |
| Type of operator              | Spring return plunger metal                                                                |
| Type of approach              | Vertical approach 1 direction                                                              |
| Cable entry                   | 1 entry tapped for M20 x 1.5 cable gland, cable outer diameter: 0.28...0.51 in (7...13 mm) |
| Number of poles               | 2                                                                                          |
| Contacts type and composition | 2 NC                                                                                       |
| Contact operation             | Slow-break, simultaneous                                                                   |
| Sale per indivisible quantity | 20                                                                                         |

## Complementary

|                                        |                                                                                                                                                                                                                                         |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch actuation                       | On end                                                                                                                                                                                                                                  |
| Electrical connection                  | Screw-clamp terminals, clamping capacity: 1 x 0.34...2 x 1.5 mm <sup>2</sup>                                                                                                                                                            |
| Contacts insulation form               | Zb                                                                                                                                                                                                                                      |
| Positive opening                       | With                                                                                                                                                                                                                                    |
| Positive opening minimum force         | 30 N                                                                                                                                                                                                                                    |
| Minimum force for tripping             | 15 N                                                                                                                                                                                                                                    |
| Maximum actuation speed                | 1.64 ft/s (0.5 m/s)                                                                                                                                                                                                                     |
| Contact code designation               | R300, DC-13 (U <sub>e</sub> = 250 V, I <sub>e</sub> = 0.1 A) conforming to EN/IEC 60947-5-1 appendix A<br>A300, AC-15 (U <sub>e</sub> = 240 V, I <sub>e</sub> = 3 A), I <sub>the</sub> = 10 A conforming to EN/IEC 60947-5-1 appendix A |
| [Ui] rated insulation voltage          | 500 V degree of pollution 3 conforming to IEC 60947-1<br>300 V conforming to UL 508<br>300 V conforming to CSA C22.2 No 14                                                                                                              |
| [Uimp] rated impulse withstand voltage | 6 kV conforming to IEC 60664<br>6 kV conforming to IEC 60947-1                                                                                                                                                                          |
| Short-circuit protection               | 10 A cartridge fuse type gG                                                                                                                                                                                                             |
| Mechanical durability                  | 10000000 cycles                                                                                                                                                                                                                         |
| Width                                  | 1.18 in (30 mm)                                                                                                                                                                                                                         |
| Height                                 | 2.95 in (75 mm)                                                                                                                                                                                                                         |
| Depth                                  | 1.18 in (30 mm)                                                                                                                                                                                                                         |
| Product weight                         | 0.14 lb(US) (0.065 kg)                                                                                                                                                                                                                  |
| Terminals description ISO n°1          | (11-12)NC<br>(21-22)NC                                                                                                                                                                                                                  |

## Environment

|                  |                                                       |
|------------------|-------------------------------------------------------|
| shock resistance | 50 gn (duration = 11 ms) conforming to IEC 60068-2-27 |
|------------------|-------------------------------------------------------|

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                                       |                                                                        |
|---------------------------------------|------------------------------------------------------------------------|
| vibration resistance                  | 25 gn (f = 10...500 Hz) conforming to IEC 60068-2-6                    |
| IP degree of protection               | IP65 conforming to IEC 60529                                           |
| IK degree of protection               | IK04 conforming to EN 50102                                            |
| overvoltage category                  | Class II conforming to IEC 61140<br>Class II conforming to NF C 20-030 |
| ambient air temperature for operation | -13...158 °F (-25...70 °C)                                             |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                             |
| protective treatment                  | TC                                                                     |
| product certifications                | CCC<br>CSA<br>UL                                                       |
| standards                             | EN/IEC 60204-1<br>EN/IEC 60947-5-1<br>UL 508<br>CSA C22.2 No 14        |


## Offer Sustainability

|                                                                                                                            |                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Green Premium product                                                                                                      | Green Premium product                                                                                                      |
| Compliant - since 1038 - Schneider Electric declaration of conformity                                                      | Compliant - since 1038 - Schneider Electric declaration of conformity                                                      |
| Reference not containing SVHC above the threshold                                                                          | Reference not containing SVHC above the threshold                                                                          |
| Available                                                                                                                  | Available                                                                                                                  |
| Need no specific recycling operations                                                                                      | Need no specific recycling operations                                                                                      |
| WARNING: This product can expose you to chemicals including:                                                               | WARNING: This product can expose you to chemicals including:                                                               |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|


## Dimensions

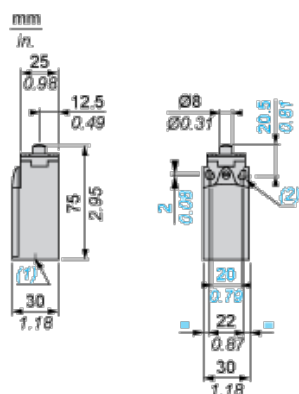

- (1) 1 tapped entry for M20 x 1.5
- (2)  $\varnothing$ : 2 elongated holes  $\varnothing$  4.3 x 6.3 on 22 mm centres, 2 holes  $\varnothing$  4.3 on 20 mm centres.

## Mounting with Cable Entry


### Position of Cable Gland

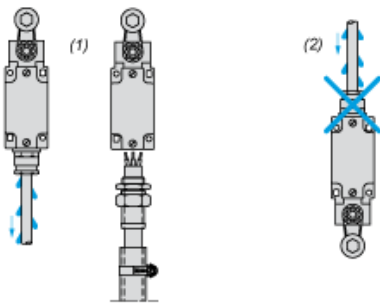

- (1) Recommended
- (2) To be avoided


## Wiring Diagram

2-pole NC + NC Simultaneous, Slow Break



## Characteristics of Actuation

Switch Actuation on End



## Functionnal Diagram

