


REVISIONS				
P	LTR	DESCRIPTION	DATE	APPV
J2	REVISED PER	ECO-16-004000	28SEP2016	NK MZ

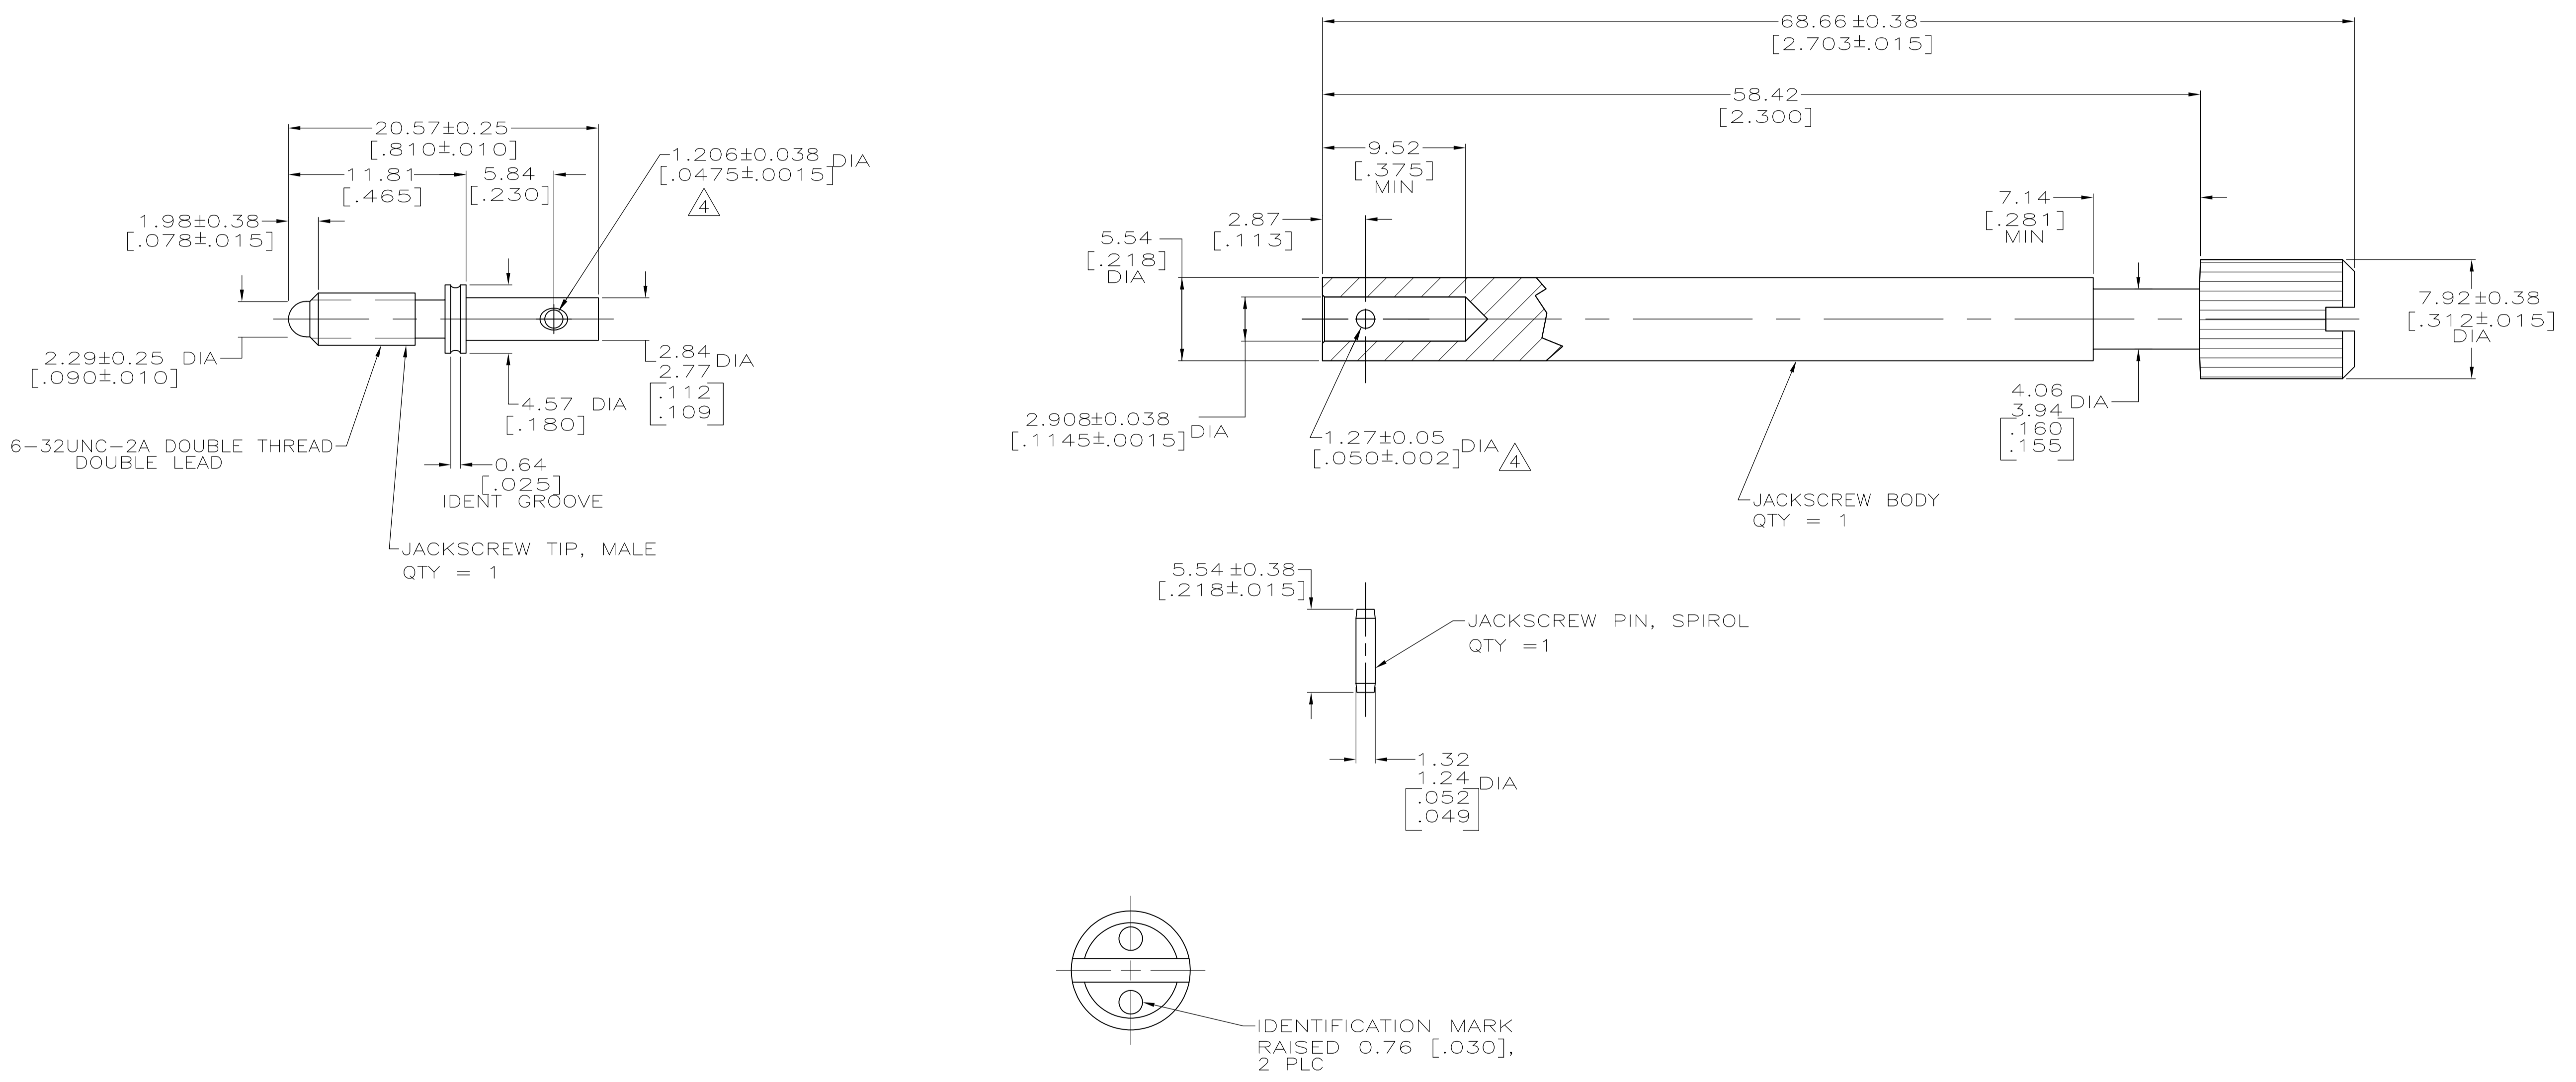

- ⚠ ZINC.
- ⚠ STAINLESS STEEL.
- 3. TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- ⚠ HOLE CENTRALLY LOCATED WITHIN  $\pm 0.07$  [.003] OF THE 5.54 [.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- ⚠ CHROMATE CONVERSION, CLEAR WITH HEXAVALENT CHROMATE.
- ⚠ CHROMATE CONVERSION, CLEAR W/O HEXAVALENT CHROMATE.

OBSOLETE	⚠	—201911—5—
	⚠	201911-1
	NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	K.FOLTZ	05/26/94
		CHK	R.STONE	06/16/94
		APPV		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		
mm [INCHES]		0 PLC	±	-
		1 PLC	±	-
		2 PLC	±	0.13 [.005]
		3 PLC	±	-
		4 PLC	±	-
		ANGLES	±	-
MATERIAL:		FINISH:		
JACKSCREW BODY: ⚠		JACKSCREW BODY: SEE NOTES		
JACKSCREW TIP: ⚠		JACKSCREW PIN: PASSIVATED		
JACKSCREW PIN: ⚠				
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A1	00779	201911	—	
WEIGHT		CUSTOMER DRAWING		
SCALE		SHEET 1 OF 1 REV J2		