




REV.	ECN NO.	DATE	SIGN	DESCRIPTION




(5) Sealing Nut




(4) Clamp Ring



(3) Seals B2







(2) Seals B1



(1) Connector

With Liquid Glue
點防水膠

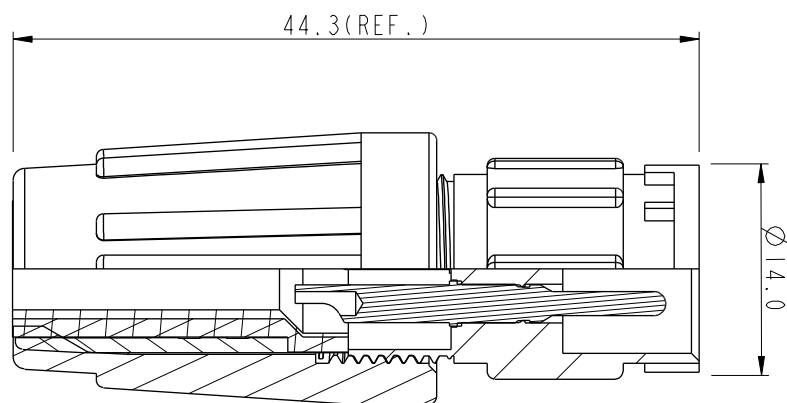

Pin Assignments
Front View 前視圖

Note:

- * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
- * Important Dimension.
- * Waterproof Rate : IP66
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Seals: Black, EPDM
- * Clamping Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * PE Bag: 90mm*85mm
- * Liquid Glue: Clear

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard, Assy Lock 3Pin M Conn M Pin		BB-03BMMA-LL6001		SamChang		2012-03-14	
.XXX ±0.05		ANGLES ±1°		SCALE	SIZE	SHEET	OF	CHECKED BY		DATE	
REV. A		WC-REV. A.3		1:1	A4	1	1	Jeffrey		2012-03-19	
				QC: Inspection item		CUSTOMER		APPROVED BY		DATE	
						ALTW		Kevin		2012-03-19	

Amphenol LTW
安費諾亮泰企業股份有限公司