
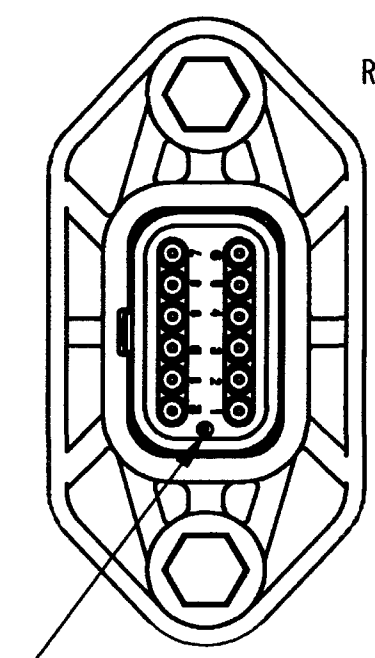



CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE REF ONLY 
16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.0-0.5]

REV
A DT04-12PA-BL10

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P18488	2/19/04	R.D.R.
A	REVISED PER E.O. P18563	5-19-04	RDR

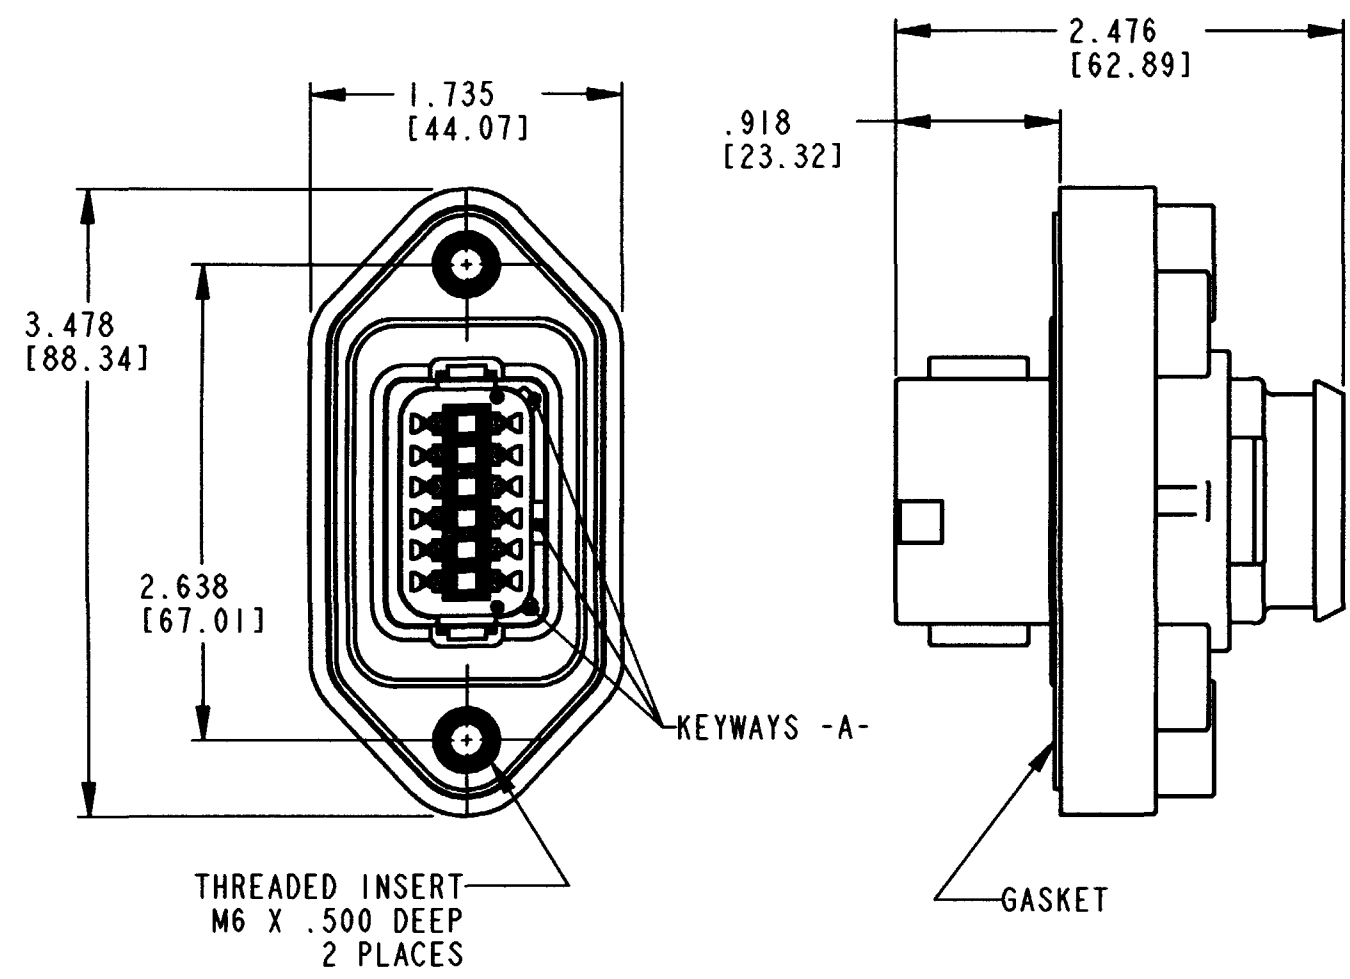

-E- SYMBOL DESIGNATES REDUCED DIAMETER WIRE SEAL

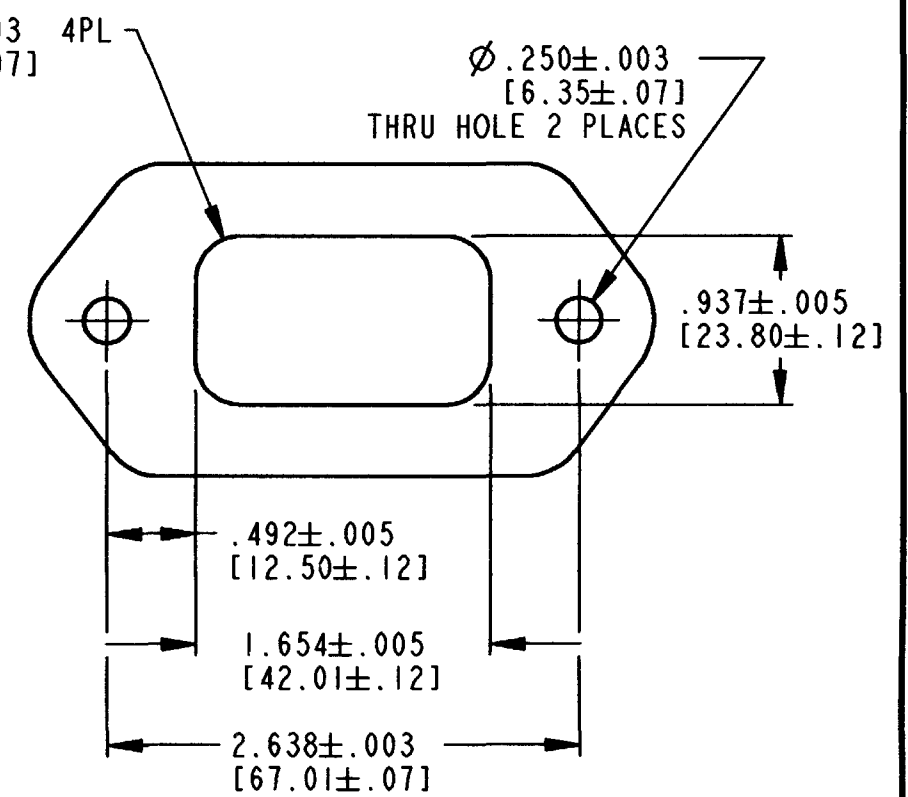

RECOMMENDED PANEL-CUTOUT

- MATERIAL: SHELL: PLASTIC; SEAL & GASKET: RUBBER; INSERT: STAINLESS STEEL.
- THIS RECEPTACLE MATES WITH DT06-12SA-**** PLUG. (**** = ALL MODIFICATIONS) CONSULT FACTORY FOR MODIFICATIONS.

 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWINGS 0425-015-0000 AND 0425-017-0000.

- DIMENSIONS ARE ±.025 [0.64] UNLESS OTHERWISE SPECIFIED.

NOTES: 1. DIMENSIONS ARE IN INCHES [MILLIMETER].

SIGNATURE & DATE	
DR	X. SANCHEZ 12FEB04
CHK	B. Byford 5/13/04
PE	Tech. Yehon 5/13/04
APPD	SPend 5-13-04
SCALE	NONE
WT	

12 WAY RECEPTACLE
WITH ENHANCED KEY,
& SHRINK BOOT
-BL10 MOD.
KEY ARR. -A-
COLOR: GRAY
D.T. SERIES

ENVELOPE

CP	MATL. CODE
The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
B	DT04-12PA-BL10
DWG SIZE	CODE 11139 SHEET 1 OF 1