



**NO O-RING
REQUIRED!**



Heyco® -Tite Liquid Tight Cordgrips

Pigtail™, NPT Hubs with Integral Sealing Ring



The Ultimate in Liquid Tight Strain Relief Protection

- Flexible Pigtail extender prevents sharp bends and extends cable life.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .705" (17,9 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Locknuts not included.** For nylon locknut specifications or to order locknuts separately, see page 3-45.
- For Heyco Liquid Tight Threaded Plugs, see page 3-49.
- Consult Heyco for cordgrips molded in other colors.

| CABLE DIA. RANGE | | | | PART NO. Locknuts Not Included* | | DESCRIPTION | UL or RA | PART DIMENSIONS | | | | | | | | | |
|------------------|------|---------|------|---------------------------------|--------------|------------------|----------|-----------------------|------|--------------------|-------|-----------------|------|------------------|-----|-----------------|------|
| Minimum | | Maximum | | Black | Gray | | | A Clearance Hole Dia. | | B Max. O.A. Length | | C Thread Length | | D Wrenching Thk. | | E Nut Flat Size | |
| in. | mm. | in. | mm. | | | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | |
| .065 | 1,7 | .210 | 5,3 | M4536 | M4537 | Flex RLTCG 1/4 | RA | .540 | 13,7 | 2.57 | 65,3 | .45 | 11,4 | .21 | 5,3 | .63 | 16,0 |
| .115 | 2,9 | .250 | 6,4 | M4538 | M4539 | Flex LTCG 1/4 | | | | | | | | | | | |
| .065 | 1,7 | .230 | 5,8 | M3474 | M3475 | Flex RLTCG 3/8 | RA | .680 | 17,3 | 2.94 | 74,7 | .49 | 12,4 | .21 | 5,3 | .82 | 20,8 |
| .105 | 2,7 | .315 | 8,0 | M3254 | M3255 | Flex LTCG 3/8 | | | | | | | | | | | |
| .095 | 2,4 | .290 | 7,4 | M4540 | M4541 | Flex RLTCG 1/2 | UL | .875 | 22,2 | 4.09 | 103,9 | .61 | 15,5 | .21 | 5,3 | .98 | 24,9 |
| .170 | 4,3 | .450 | 11,4 | M3251 | M3252 | Flex LTCG 1/2 | | | | | | | | | | | |
| .260 | 6,6 | .546 | 13,9 | M3266 | M3267 | Flex LTCG LL 1/2 | UL | .875 | 22,2 | 4.37 | 111,0 | .44 | 11,2 | .25 | 6,4 | 1.06 | 26,9 |
| .250 | 6,4 | .490 | 12,4 | M3462 | M3463 | Flex RLTCG 3/4 | UL | 1.040 | 26,4 | 5.15 | 130,8 | .62 | 15,7 | .25 | 6,4 | 1.30 | 33,0 |
| .435 | 11,0 | .705 | 17,9 | M3239 | M3242 | Flex LTCG 3/4 | | | | | | | | | | | |

Standard colors black and gray.

*To order Nylon or Metal Locknuts separately, see pages 3-45 and 3-46.

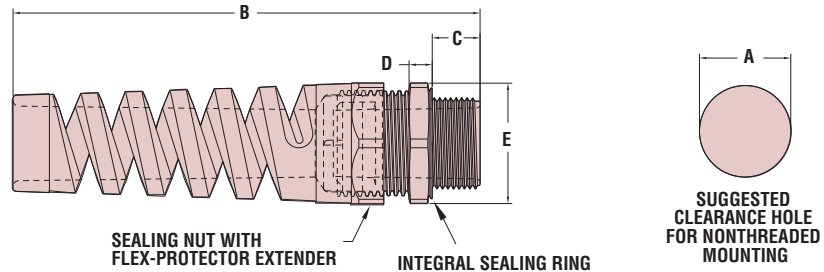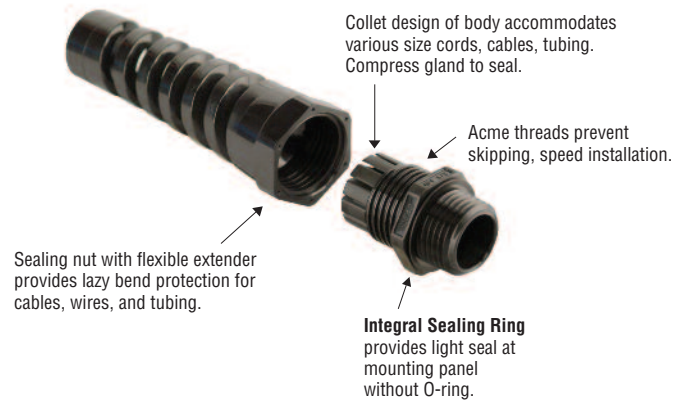

*Quick
Specs*

| | |
|---------------------|--|
| Material | Nylon 6/6 w/Buna N or TPE Sealing Gland |
| Certifications | <ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E51579 RA Recognized under the Component Program of Underwriters' Laboratories File E51579 SP Certified by Canadian Standard Association File 93876C |
| Flammability Rating | 94V-2 |
| Temperature Range | Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C) |
| IP Rating | IP 68 (70 PSI, 5 BAR) |