
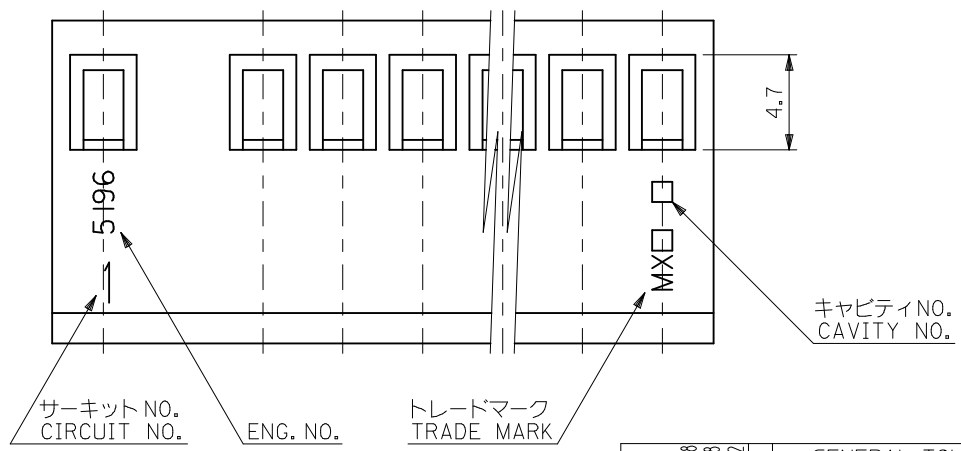
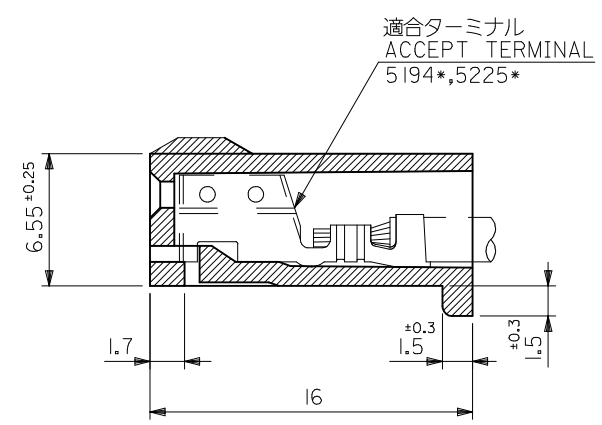


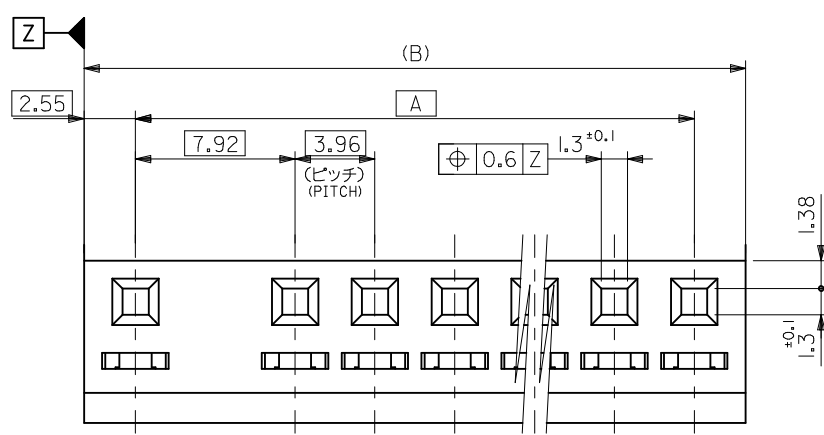

- 注記
NOTES
1. 各部の反りは0.5最大。
WARPING : 0.5 MAX.
 2. サークキットNO.はNO.*I "のみ表示。
CIRCUIT NO. : I ONLY.

44.7	39.6	09-50-1104	5196-102	10
36.78	31.68	09-50-1084	5196-082	8
B	A	EDP. NO.	MATERIAL NO. NO. OF CXTS.	極致
			MODEL NO.	5196-N2
			THIRD ANGLE PROJECTION	

材料
MATERIAL
ナイロン66, UL94V-2
NYLON66, UL94V-2

REVISED
EC NO: J2009-0871
DRWN: NAKAMURA
CHKD: T. HARUYAMA
APPR: NUKITA

DESCRIPTION
10 UNDER ±0.2
10 OVER 30 UNDER ±0.25
30 OVER ±0.3
ANGULAR ±3 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)

DIMENSION STYLE
DRAWN BY T. YASUI
DATE '96/4/9
CHECKED BY S. A
DATE '96/4/10
APPROVED BY M. FUKUSHIMA
DATE '96/4/10
MATERIAL NO.

SCALE
4:1

DESIGN UNITS

THIRD ANGLE PROJECTION

SPOX 7.92/3.96 PITCH
RECEPTACLE HOUSING

MOLEX INCORPORATED

DOCUMENT NO. SD-5196-002

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION