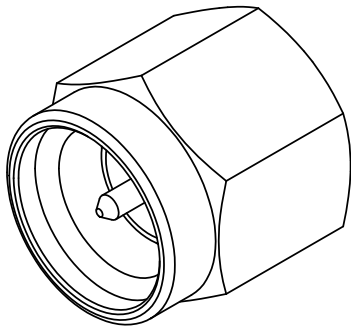
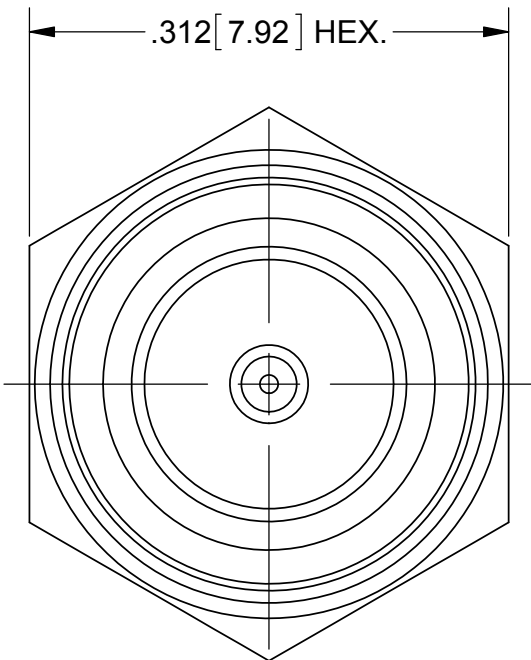
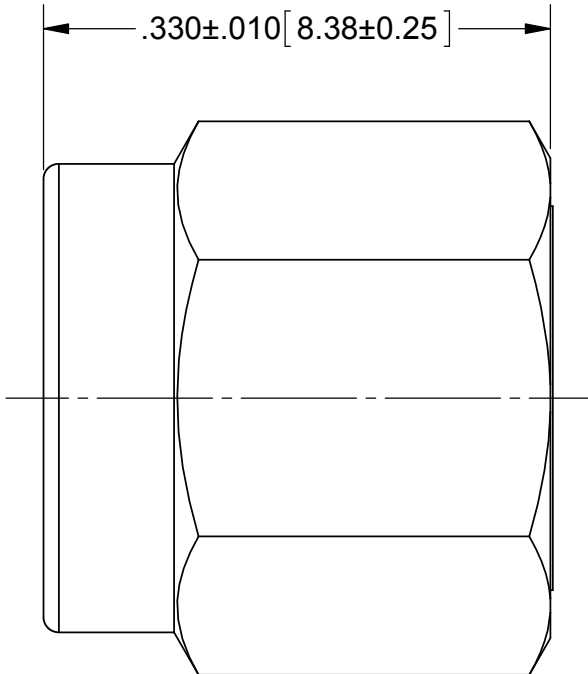


ROHS COMPLIANT		PRODUCT DATA DRAWING		REVISION HISTORY			
REV	DESCRIPTION			DATE	APPROVED		
A	DCN 41827			11/15	DAL		
							
MATERIAL:							
BODY & COUPLING NUT:	STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1						
LOCK RING & CONTACT:	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04						
INSULATOR:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B						
GASKET:	SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 60/70						
RESISTOR ELEMENT:	ALUMINA SUBSTRATE WITH NICHROME RESISTOR						
FINISH:							
BODY:	GOLD PER ASTM B488, TYPE I, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.						
CONTACT:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.						
COUPLING NUT:	GOLD PER MIL-DTL-45204, TYPE I, GRADE C, CLASS 1.27, OVER NICKEL PER SAE-AMS-2404, CLASS 1, .00005" MIN.						
PERFORMANCE:							
IMPEDANCE:	50 OHMS						
FREQ. RANGE:	DC TO 18.0 GHz.						