REV.	ECN NO.	DATE	SIGN	DESCRIPTION

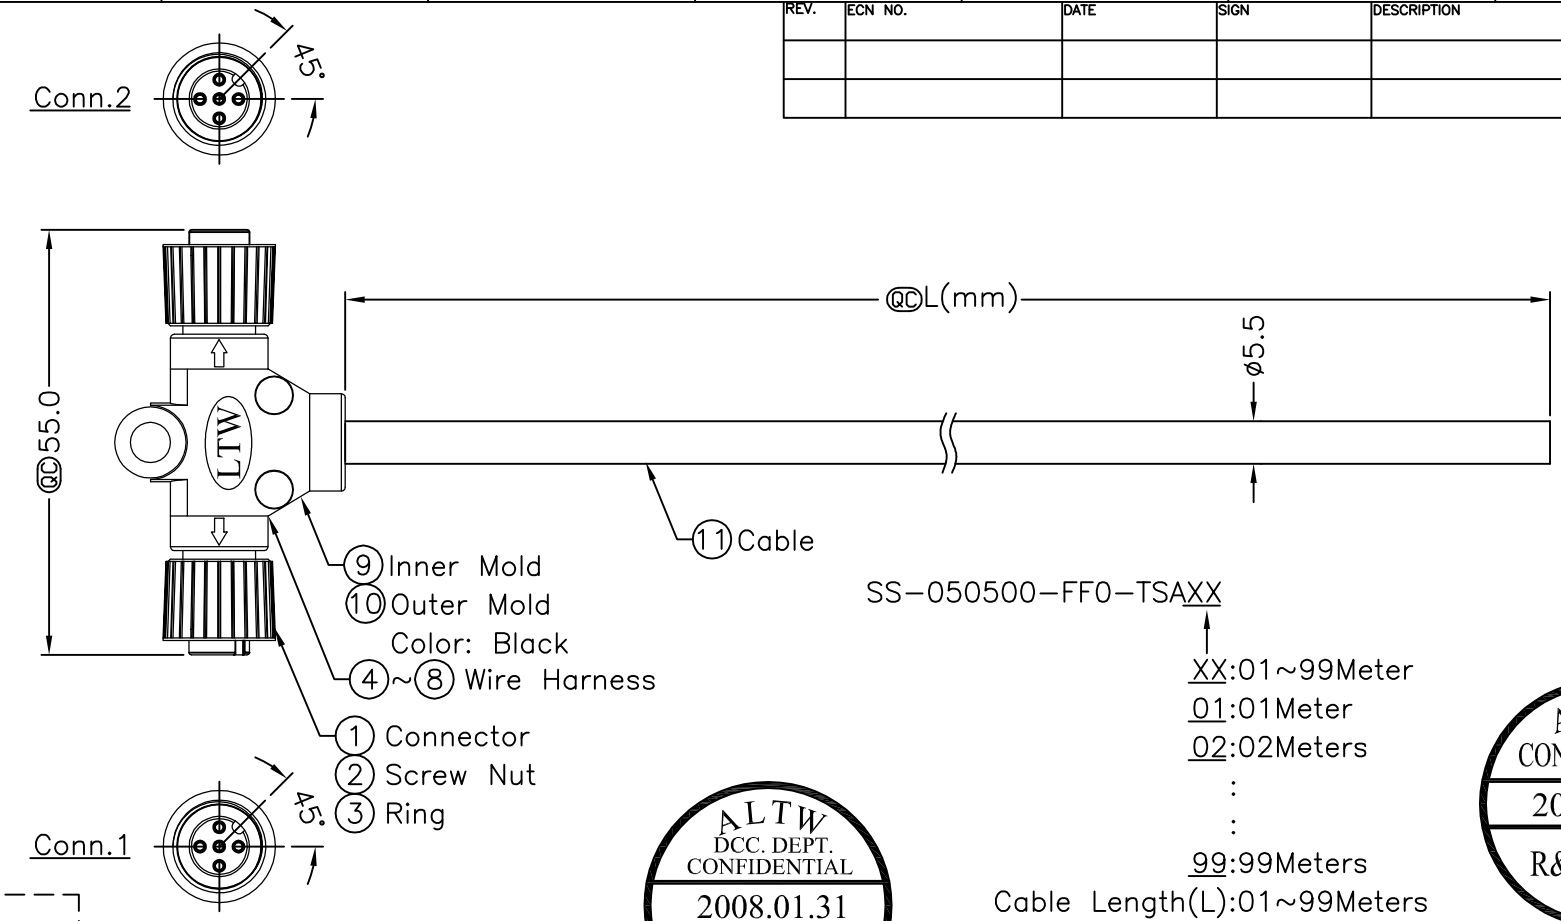

SS-050500-FF0-TSAXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

ALTW CONFIDENTIAL
2007.11.29
R&D DEPT.

ALTW DCC. DEPT. CONFIDENTIAL
2008.01.31
ISSUED



Conn.1 & Conn.2
Pin Assignments
Front View

Conn.1	Wire Color	Conn.2
5	Green	5
4	Black	4
3	Blue	3
2	White	2
1	Brown	1

Pin Out

Note:
* QC Important Dimension.
* Waterproof Rate: IP68
* Housing: Black, PU
* Female Pin: Copper Alloy, Gold Plated
* Wire Harness: UL1007 24AWG, 5Pcs.
* Cable: UL2464 22AWG*5C+Talc
  Black, PVC Jacket UV Resistant OD=5.5mm
* Cable Length Tolerance: 1M~10M±5%mm,
  11M~99±500mm.

UNIT:mm	TITLE: M12 Conn T Cable Screw FF Conn FF Pin	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY: Raul Paulo Canja	DATE: 2007/11/29
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1		DWG NO: SS-050500-FF0-TSAXX	CHECKED BY: Robert Dabu	DATE: 2007/12/04
	REV.: A / SIZE: A4 / QC :Inspection Item		CUSTOMER: ALTW	APPROVED BY: Cloud	DATE: 2008/01/04

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.