

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20




© COPYRIGHT 20

BY -



ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUN2015	DL	CW

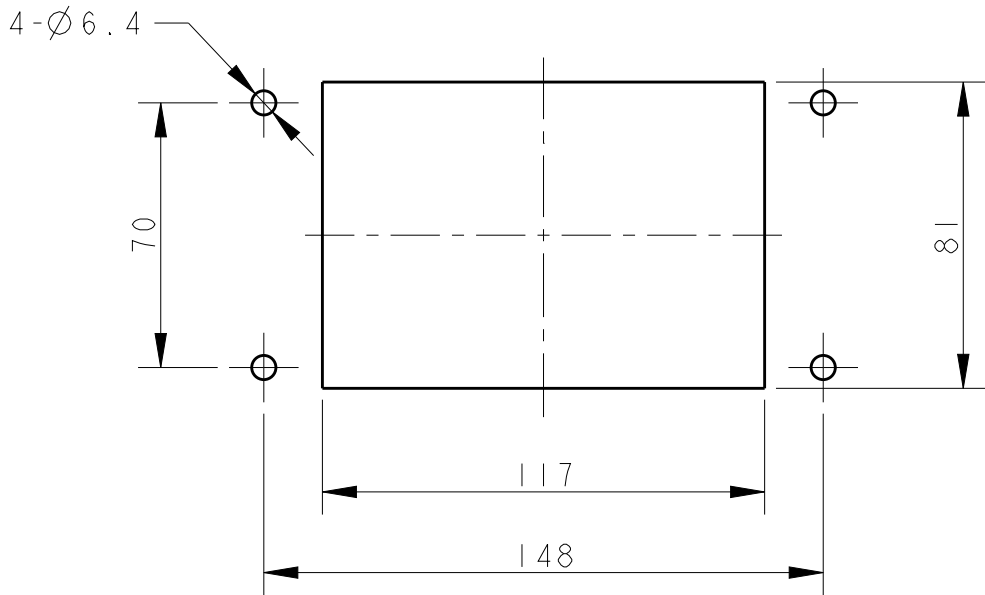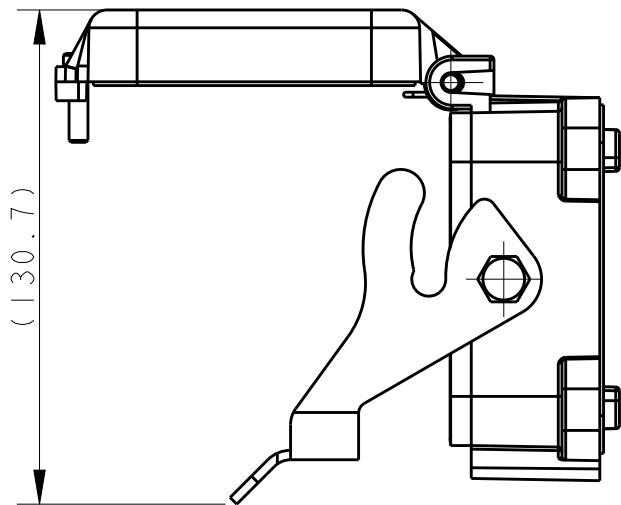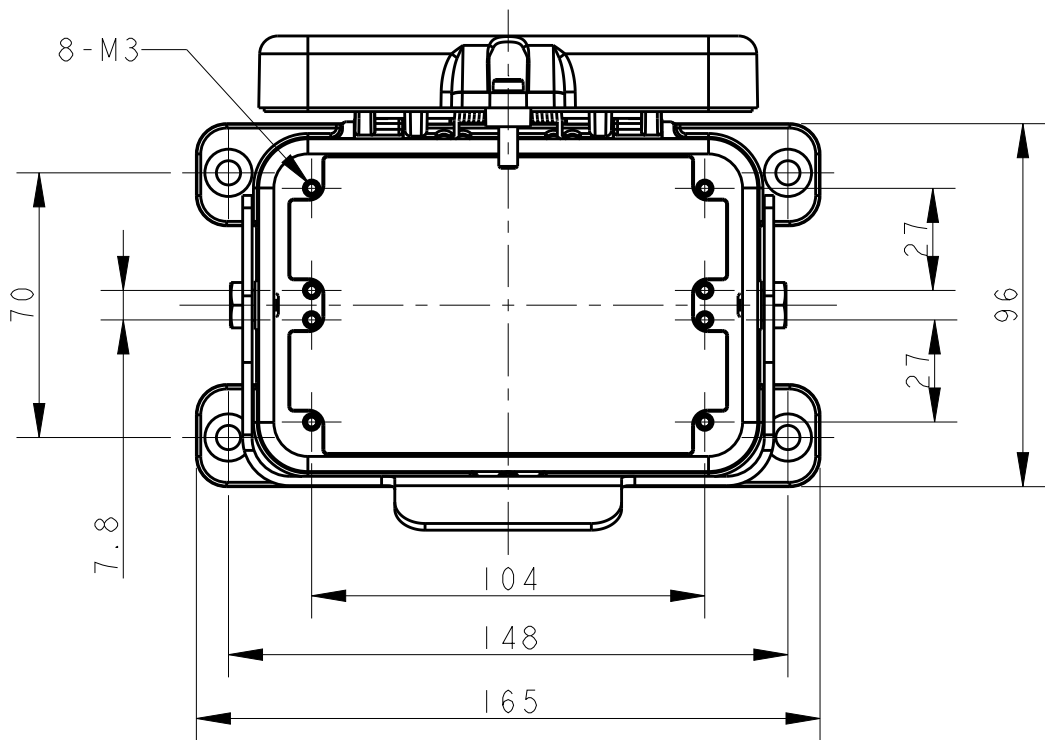


开孔安装示意图
PANNEL CUT OUT

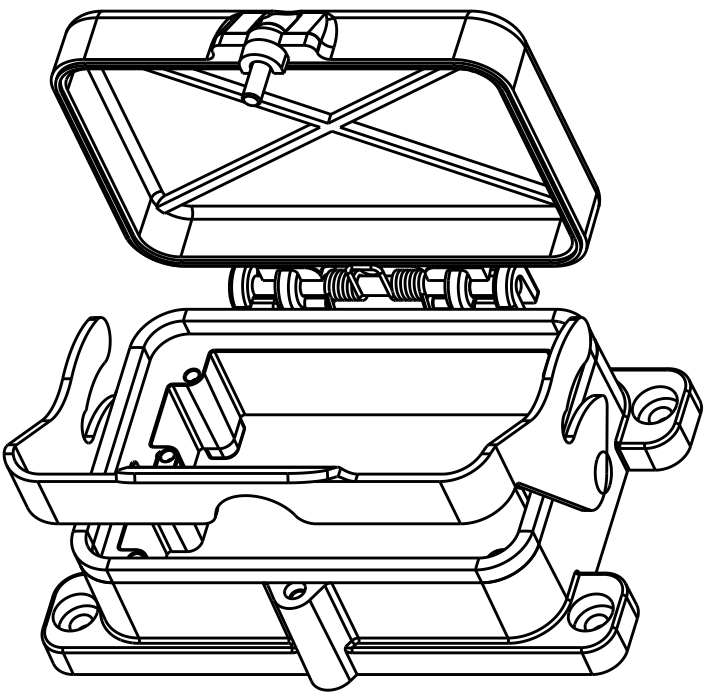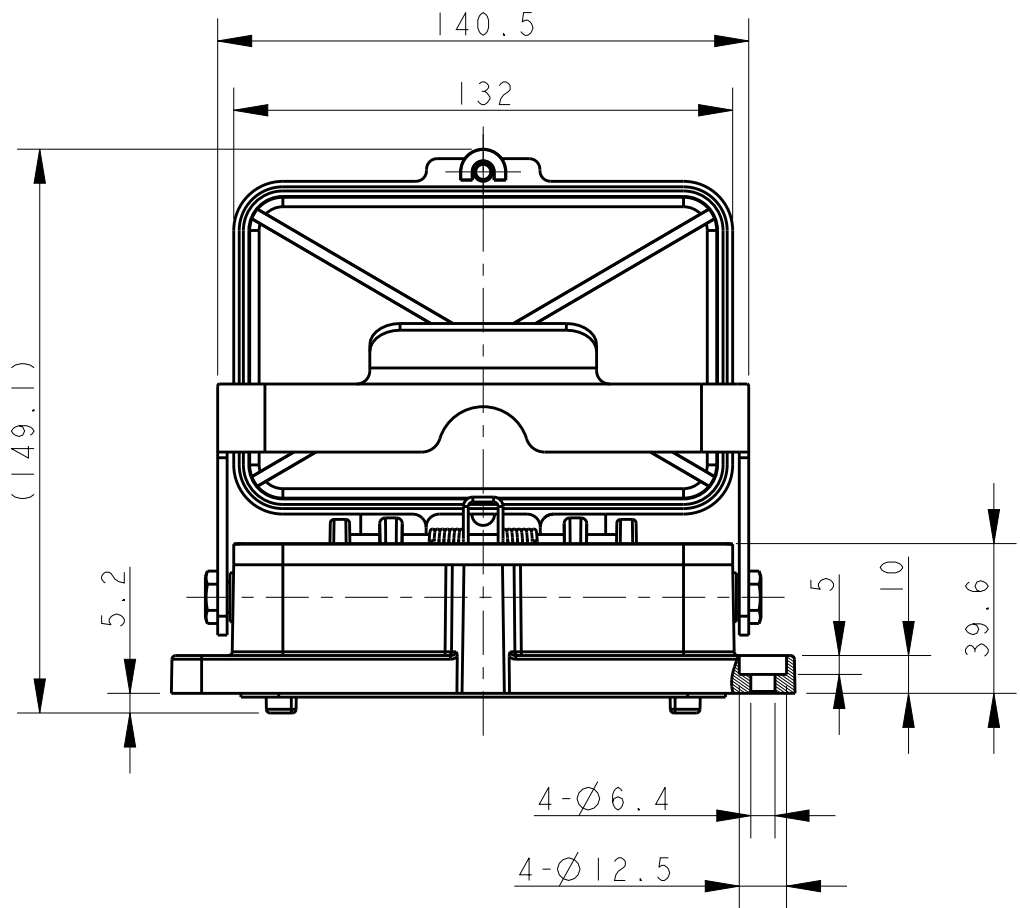

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI510482000-000	H48B-AD-LB
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUN2015	 TE Connectivity		
		CHK CHRIS WANG 08JUN2015			
		APVD XU XIANG 08JUN2015			
		PRODUCT SPEC 108-137013			
DIMENSIONS: mm		APPLICATION SPEC 114-137013	NAME H48B-AD-LB		
		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-TI510482000000
MATERIAL -		FINISH -	RESTRICTED TO -		
		CUSTOMER DRAWING	SCALE 1:2	SHEET 1	OF 1
				REV A	