
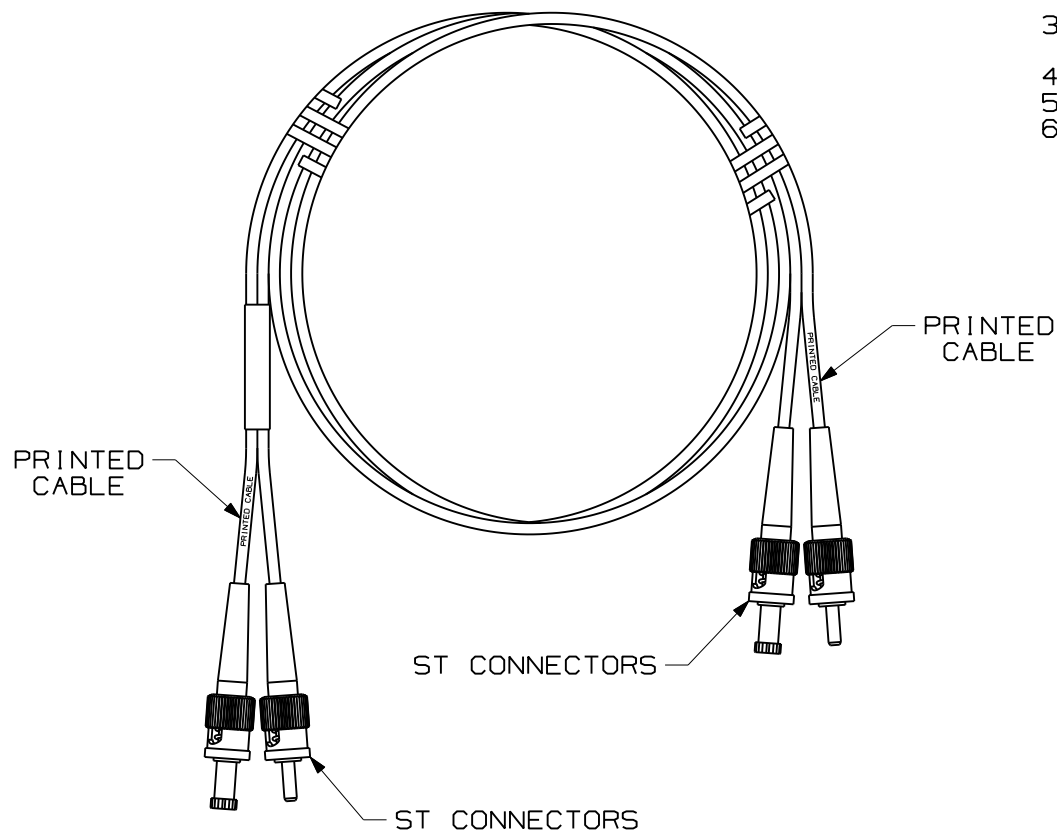


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.



										NETKEY FIBER OPTIC PATCH CORD DUPLEX ST TO ST CONFIGURATION CUSTOMER DRAWING		
										 PANDUIT TM CORP. TINLEY PARK, ILL 60477	DRAWING FILENAME M01302CW_DC/00A	
											SCALE NONE	
										 THIRD ANGLE PROJECTION	PART NO. NKF•GR022-2M•• NKF•GL022-2M••	
											DRAWING NO. 01302-58 SHEET 1 OF 2	SIZE A
R	12-15-09	EFK		RELEASED TO PRODUCTION	01302-58					ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (1.X) (1.XX) ±.03 (0.8) ANGLES (1.XXX) ±.010 (0.3)	MATERIAL	
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	DRAWN BY EFK DATE 12-15-09 CHK'D		

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


DUPLEX ST TO ST FIBER OPTIC PATCH CORD

PANDUIT PART NUMBER	LENGTH (**) M = METERS	CABLE				LC CONNECTOR		
		FIBER TYPE	COUNT	RATING	COLOR	BOOT COLOR	MAX. IL	MIN. RL
NKF6GR022-2M**	01, 02, 03, 05, 10	62.5/125 OM1	DUPLEX 3.0mm ZIPCORD	RISER (OFNR)	ORANGE	BLACK RED	0.75dB	26dB
NKF5GR022-2M**		50/125 OM2			AQUA			40dB
NKFXGR022-2M**		50/128 OM3			YELLOW			40dB
NKF9GR022-2M**		SINGLEMODE OS1		LOW SMOKE ZERO HALOGEN (LSZH)	ORANGE	BLACK RED	0.75dB	26dB
NKF6GL022-2M**		62.5/125 OM1			AQUA			40dB
NKF5GL022-2M**		50/125 OM2			YELLOW			40dB
NKFXGL022-2M**		50/128 OM3			YELLOW			40dB
NKF9GL022-2M**		SINGLEMODE OS1			YELLOW			40dB

NETKEY FIBER OPTIC PATCH CORD
DUPLEX ST TO ST CONFIGURATION
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



THIRD ANGLE
PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 (0.8) ANGLES
(.XXX) ±.010 (0.3)

DRAWING FILENAME
M01302CW_DC/00A

SCALE
NONE

DRAWN BY
EFK

MATERIAL

PART NO. NKF•GR022-2M••
NKF•GL022-2M••

DRAWING NO.
01302-58
SHEET 2 OF 2
SIZE
A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	12-15-09	EFK		RELEASED TO PRODUCTION	01302-58				