

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

METRIC

LOC

DIST

REVISIONS

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	END STAND OFF WIDTH INCREASED	06JAN2016	KJK	PS

POS. PER ROW 'N'	L	PART NUMBER
2	5.08	215307-2
3	7.62	-3
4	10.16	-4
5	12.70	-5
6	15.24	-6
7	17.78	-7
8	20.32	-8
9	22.86	-9
10	25.40	1-
11	27.94	1-
12	30.48	1-
13	33.02	1-
14	35.56	1-
15	38.10	1-
16	40.64	1-
17	43.18	1-
18	45.72	1-
19	48.26	1-
20	50.80	2-
21	53.34	2-
22	55.88	2-
23	58.42	2-
24	60.96	2-
25	63.50	2-
26	66.04	2-
27	68.58	2-
28	71.12	2-
29	73.66	2-
30	76.20	3-
31	78.74	3-
32	81.28	3-
33	83.82	3-
34	86.36	3-
35	88.90	3-
36	91.44	3-215307-6




OBSOLETE

OBSOLETE

OBSOLETE

OBSOLETE

OBSOLETE

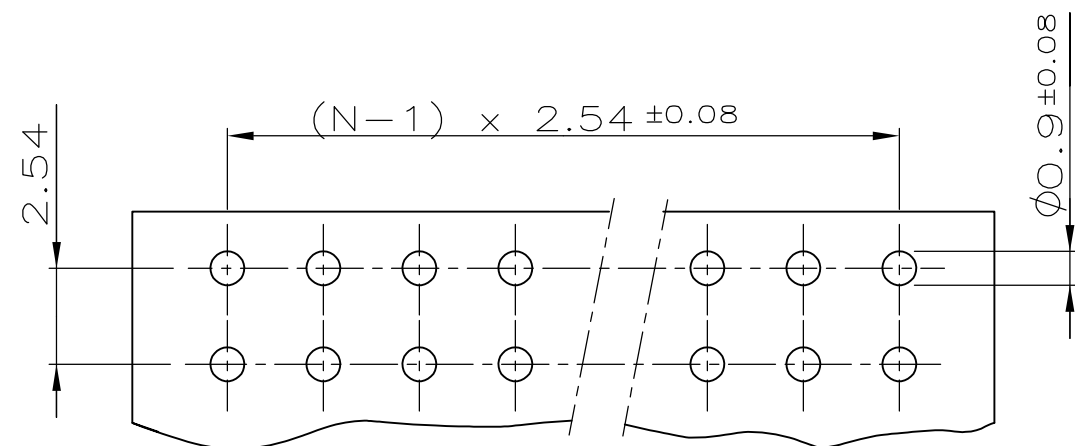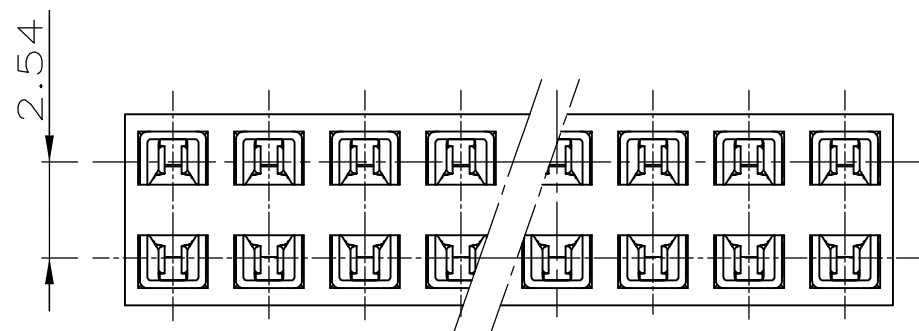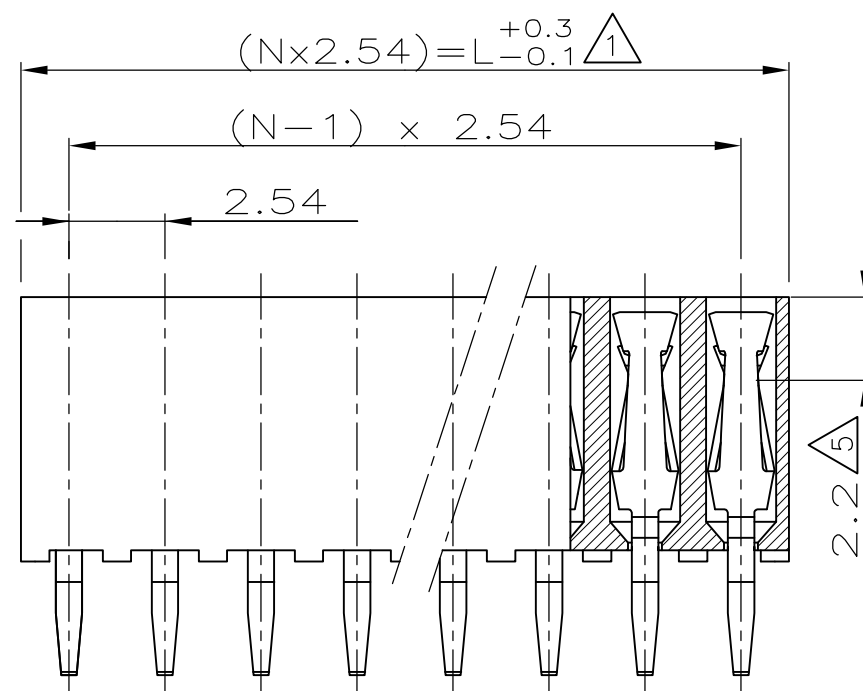


P.C.-BOARD HOLE-PATTERN

NOTES:

1. TO DETERMINE DIMENSIONS TAKE $2 \times N = \text{NR. OF POS.}$.
FOR EXAMPLE: $2 \times 10 \text{ POS.: } N \times 2,54 = 25,4 \text{ mm.}$
FOR ORDER NR. USE BASIC NR. + NR. OF POS.
FOR EXAMPLE: $2 \times 2 \text{ POS.} = 215 \text{ 307-2 (SHORTEST VERSION)}$
 $2 \times 36 \text{ POS.} = 3-215 \text{ 307-6 (LONGEST VERSION)}$
2. HOUSING MATERIAL: GREEN GLASS FILLED POLYESTER, UL 94V-0
CONTACT MATERIAL: PHOSPHOR BRONZE.
3. PLATING: UNDERCOATING: $1,3 \mu\text{m Ni.}$
AT CONT.PLACE: $0,8 \mu\text{m Au.}$
AT SOLDER-TYNES: MIN. $2,5 \mu\text{m Sn.}$
4. MATES WITH 0,63 SQUARE/ROUND MODU POSTS.
5. CONTACT-POINT.
6. RECOMMENDED P.C.BOARD-THICKNESS: 1,6.
7. RETENTION FEATURE.
8. HV100 CONNECTOR PACKED IN ANTISTATIC BLISTER

VERWENDET FÜR
E 91-52 572SEE NOTES
FINISHSEE NOTES
MATERIALSEE NOTES
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
 $\pm 0.15 \text{ mm}$

0 PLC	$\pm -$
1 PLC	$\pm -$
2 PLC	$\pm -$
3 PLC	$\pm -$
4 PLC	$\pm -$
ANGLES	$\pm -$

FINISH

MATERIAL

SEE NOTES

SEE NOTES

DWN R.VISSER 08.05.87

CHK W.SIMONS

APVD L.v.SOEST

PRODUCT SPEC

108-19056

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

STE TE Connectivity

NAME

HV 100 VERTICAL CONNECTOR
DUAL ROW, 7,0mm HEIGHT,
TOP ENTRY, GOLD, MAX. 2X36 POSITIONS

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-215307

SCALE 5:1

SHEET 1 OF 1

REV E