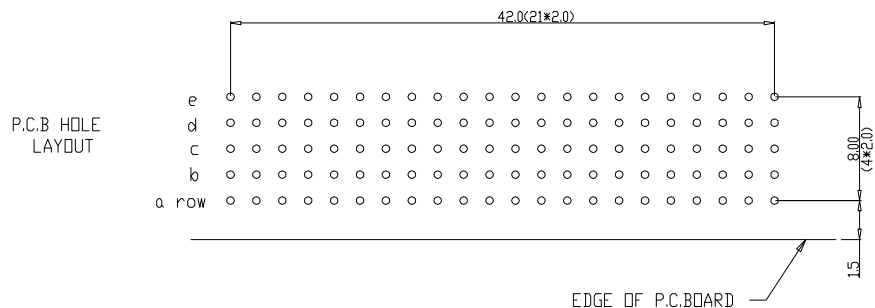
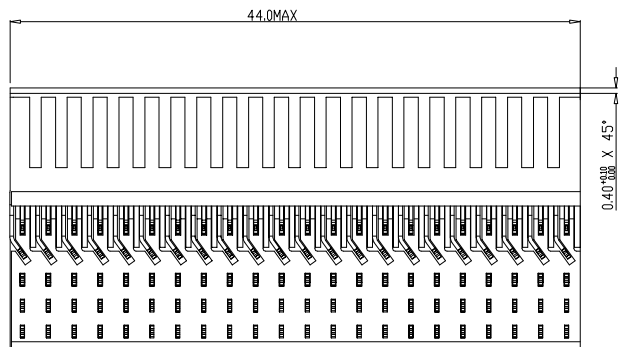
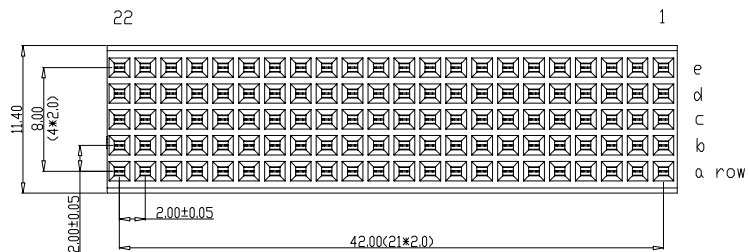


PERFORMANCE CHARACTERISTICS

1.5 A AT 20°C (FULLY LOADED)
 CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 m Ω MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN /CONT
 INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC .201844.003)
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material			Spec ref		
Mat code		✓	TOLERANCE 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°HÖEKEN		
Heat treat					
Plating/Finish					
Dr	15 10 97	M.Fret	size		Scale
Eng		Product family		A1	5.000
Chr		Model Name		ECN	
Appr		Model Revision		REL Level	
		MPACS 5+2R RA RCP CONN TYPE B		BS.C .201418.036	
Title		Rev		Rev.	

rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-9-01
B	DG05-0278	kason	02-08-05
C	DG07-0362	kason	05/09/07
D	DG10-0110	NZ	05/30/10