

## ZFKDSA 1-W-3,81- 6 - 1704646

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 12 A, nom. voltage: 200 V, pitch: 3.81 mm, number of positions: 6, connection method: Spring-cage connection, mounting: Soldering, conductor/PCB connection direction: 45 °, color: green


The figure shows the 10-position version

### Your advantages

- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Can be operated without tools by means of color-coded actuating lever
- ✓ Angled connection enables multi-row arrangement on the PCB
- ✓ The latching on the side enables various numbers of positions to be combined
- ✓ Two solder pins reduce the mechanical strain on the soldering spots

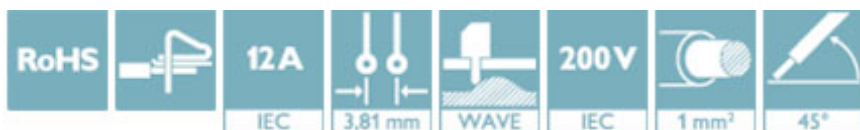

### Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4046356892070

### Technical data


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


### Drawings

## ZFKDSA 1-W-3,81- 6 - 1704646

Drilling diagram



Dimensional drawing

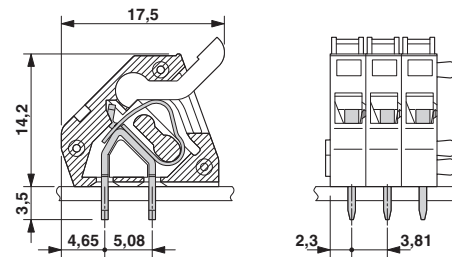

### Approvals

#### Approvals

Approvals

EAC

Ex Approvals

#### Approval details

EAC



B.01742

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>