



# TDU / TDUH / TDUL SERIES

## Encapsulated Solid-State, Delay-on-Make Timers



## Wiring Diagram

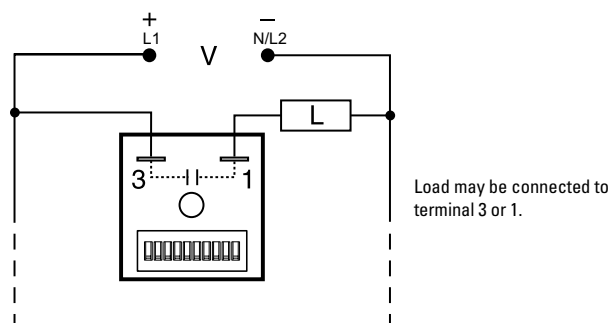

## Description

The TDU Series are encapsulated solid-state, delay-on-make timers that combine digital timing circuitry with universal voltage operation. The TDU offers DIP switch adjustment allowing accurate selection of the time delay over the full time delay range. This series is an excellent choice for process control systems and OEM equipment.

### Operation (Delay-on-Make)

Upon application of input voltage, the time delay begins. The output is de-energized before and during the time delay. At the end of the time delay, the output energizes and remains energized until input voltage is removed.

**Reset:** Removing input voltage resets the time delay and output.

## Features & Benefits

| FEATURES                                      | BENEFITS  |
|---|---|
| <b>Universal input voltage</b>                | Meets wide application needs  |
| <b>Microcontroller based</b>                  | Repeat Accuracy +/- 0.5% or 20ms, whichever is greater  |
| <b>Totally solid state and encapsulated</b>   | No moving parts to arc and wear out over time, and encapsulated to protect against shock, vibration, and humidity |
| <b>3 time ranges available (0.1s to 2.8h)</b> | Makes it versatile for use in many applications   |
| <b>DIP switch adjustment</b>                  | Provides first time setting accuracy  |

## Accessories



### P1023-6 Mounting bracket

The 90° orientation of mounting slots makes installation/removal of modules quick and easy.



### P1015-64 (AWG 14/16)

#### Female Quick Connect

These 0.25 in. (6.35 mm) female terminals are constructed with an insulator barrel to provide strain relief.




### P1015-18 Quick Connect to Screw Adapter

Screw adapter terminal designed for use with all modules with 0.25 in. (6.35 mm) male quick connect terminals.



### C103PM (AL) DIN Rail

35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.



### P1023-20 DIN Rail Adapter

Allows module to be mounted on a 35 mm DIN type rail with two #10 screws (DIN rail not included).

## Ordering Information

| MODEL     | INPUT VOLTAGE    | TIME RANGE (SEC) |
|-----------|------------------|------------------|
| TDUL3000A | 24 to 120VAC/DC  | 0.1-102.3        |
| TDUL3001A | 100 to 240VAC/DC | 0.1-102.3        |
| TDU3000A  | 24 to 120VAC/DC  | 1-1023           |
| TDU3001A  | 100 to 240VAC/DC | 1-1023           |
| TDU3003A  | 120 to 277VAC/DC | 1-1023           |
| TDUH3000A | 24 to 120VAC/DC  | 10-10230         |
| TDUH3001A | 100 to 240VAC/DC | 10-10230         |

If you don't find the part you need, call us for a custom product 800-843-8848

## TDU / TDUH / TDUL SERIES

### Specifications

#### Time Delay

##### Type

##### Range\*

Digital integrated circuitry  
0.1 - 102.3s in 0.1s increments  
1 - 1,023s in 1s increments  
10 - 10,230s in 10s increments  
±0.5% or 20ms, whichever is greater

##### Repeat Accuracy

##### Tolerance

##### (Factory Calibration)

##### Recycle Time

##### Time Delay vs Temp.

##### & Voltage

±10%

≤ 150ms

±5%

#### Input

##### Voltage

##### AC Line Frequency

##### Tolerance

24 to 120VAC/DC; 100 to 240VAC/DC

50/60 Hz

±20%

#### Output

##### Type

##### Form

##### Maximum Load Current

##### Minimum Holding Current

##### Voltage Drop

Solid state

NO, open during timing

1A steady state, 10A inrush at 60°C

40mA

≈ 2.5V @ 1A

#### Protection

##### Circuitry

##### Dielectric Breakdown

##### Insulation Resistance

Encapsulated

≥ 2000V RMS terminals to mounting surface

≥ 100 MΩ

#### Mechanical

##### Mounting

##### Dimensions

Surface mount with one #10 (M5 x 0.8) screw

**H** 50.8 mm (2"); **W** 50.8 mm (2");

**D** 30.7 mm (1.21")

##### Termination

0.25 in. (6.35 mm)

male quick connect terminals

#### Environmental

##### Operating/Storage

##### Temperature

##### Humidity


##### Weight

-40° to 60°C / -40° to 85°C

95% relative, non-condensing


≈ 2.4 oz (68 g)

### Binary Switch Operation

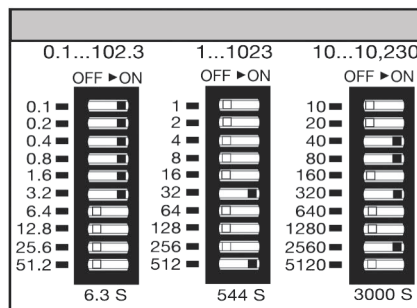

\*For CE approved applications, power must be removed from the unit when a switch position is changed.

### Function Diagram

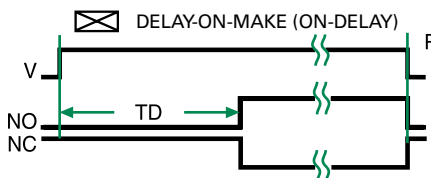

V = Voltage  
NO = Normally Open Contact  
NC = Normally Closed Contact  
TD = Time Delay  
R = Reset  
— = Undefined Time