

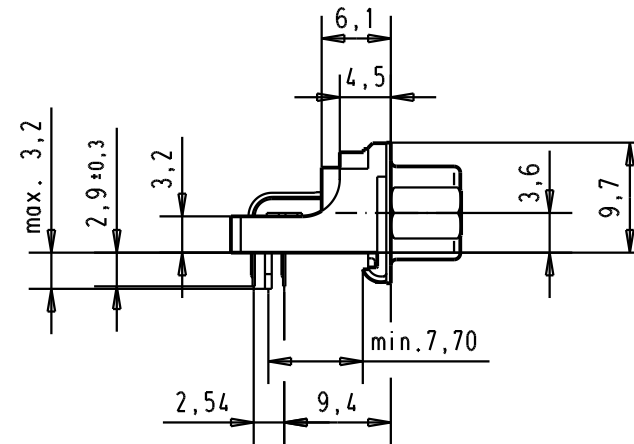
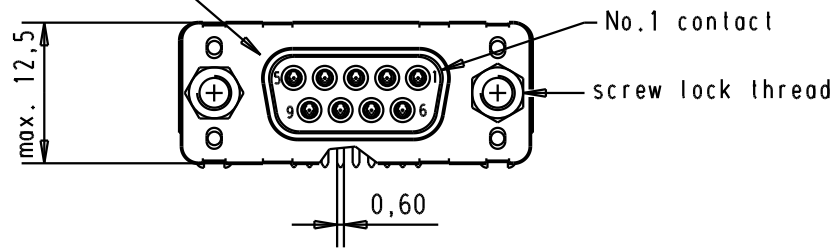


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

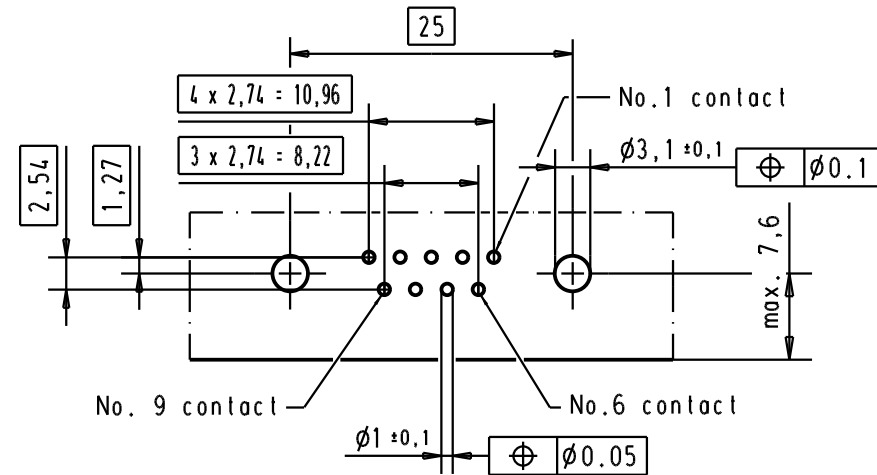

PCB layout hole
component side

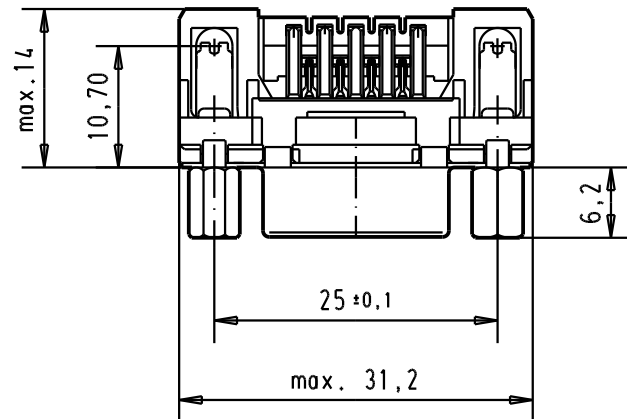

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A							Dat.	Name		D-Sub 09 poles low profil angle female,solder pin with screw lock and grounding board lock.	Maßstab/ Scale 1.5:1	
			31892	05/05/04	JH	Detail.	02/sept/00	jfb				
			31084	04/SEP/02	YT	Insp.						All Dim. in mm Orig. Size DIN A 4
	09 66 152 3617	4-40 UNC	1	27961	24/nov/00	jfb	Stand.				TB 0966152x61x	Blatt/ Page 3 / 5
	09 66 152 6617	4-40 UNC	2	27952	26/oct/00	jfb	HARTING EURL F-95972 Paris					
	09 66 152 7617	4-40 UNC	3	27948	02/sept/00	jfb						
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name				Sub.			