

Part No.	Cable color
~084N~	WHITE
~084N1~	---
~084H~	BLACK
~084N2~	---

NOTE 1 We indicate the length of the harness on the last of product name, 'L' part.


2 Tolerance for [L]

Length L [mm]	Tolerance [mm]
35 ≤ L ≤ 200	±4
200 < L ≤ 500	±8
500 < L ≤ 1000	±12
1000 < L	±1.5%

3 Connector rotation angle is within ±45 degree from the above image. For long length in the case of L>500, the angle is optional.

4. Specifications are subject to change without notice.

[DIMENSIONS OF CONNECTOR]

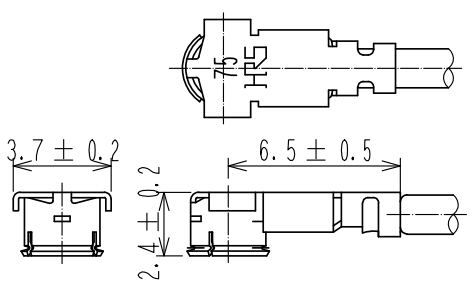

1 For stable supply of this series, material supplier of piece part#1 will be changed during 2019-2022. Please note this change in advance. There will be no difference in product performance and quality.

[PRECAUTIONS FOR HANDLING]

- Connector insertion and extraction
 - a. Connector shall be extracted vertically by specialised extraction JIG. Part No. : H. FL-LP-N (CL Code: CL331-0551-7) Never hold the cable when extracting the cable because it damages the connector.
 - b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting.

2	H. FL75-CONTACT	CL331-0550-4-00		
1	H. FL75-LP-084(C01)	CL331-0541-3-01	3	1.5Dia. coaxial cable
NO.	PART NO.	CODE NO.	NO.	PART NO.

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	FREE	1	DIS-D-00003994	MK. INOUE	NK. NINOMIYA	20190419
APPROVED : NK. NINOMIYA 20180611			DRAWING NO. EDC-383474-00-00			
CHECKED : MT. KANEKO 20180611			PART NO. H. FL75-2LP-084** - A-L			
DESIGNED : MS. MATSUMOTO 20180611			CODE NO. CL321-5111-4-00			
DRAWN : MS. MATSUMOTO 20180611						