
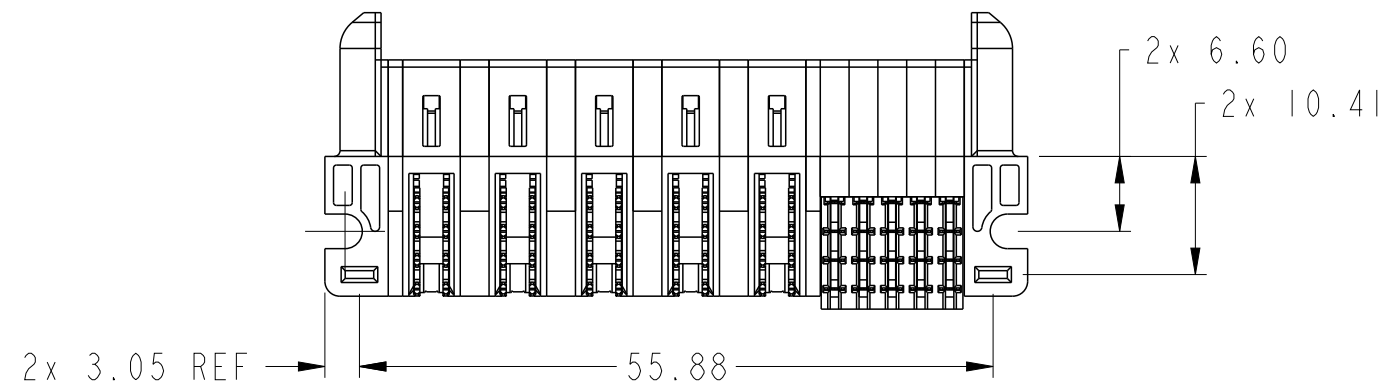
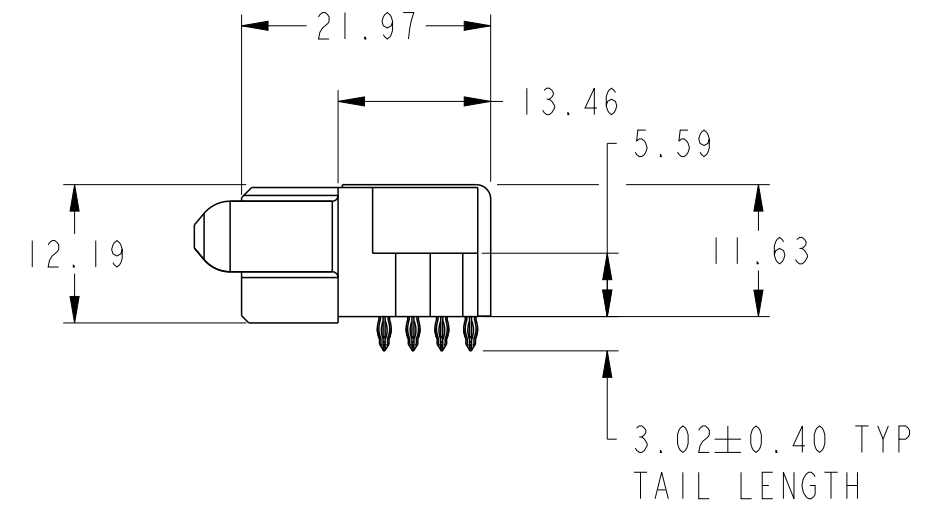
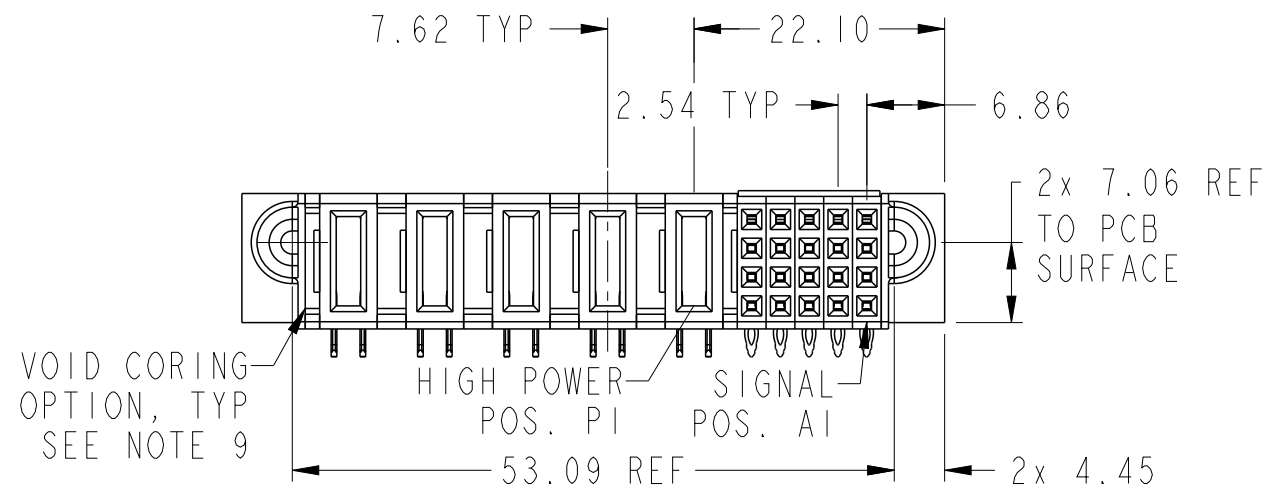


PRODUCT NUMBER SEE SHEET 2

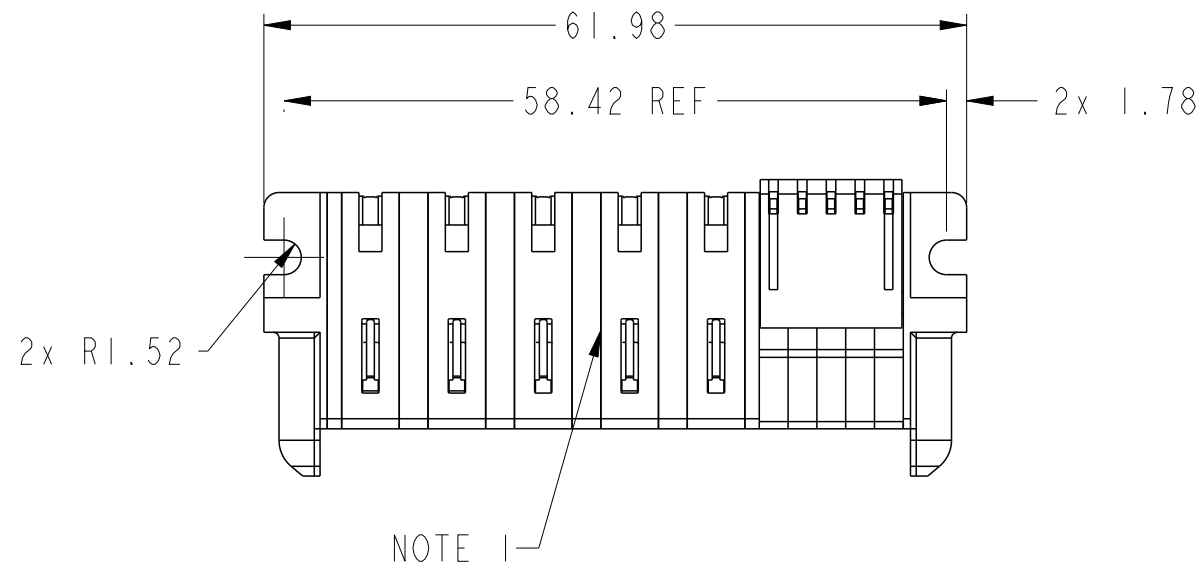

spec ref				dr	Rainbow Zhan	2014/10/23	projection	MM	size	A3	scale	3:2							
tolerance std				eng	Vicking Liu	2016/10/31			ecn no				ELX-DG-25114-1						
ASME Y14.5				chr	Fancy Zhang	2016/11/02			rel level				Released						
TOLERANCES UNLESS OTHERWISE SPECIFIED				appr	Pei-Ming Zheng	2016/11/02			product family				PwrBlade+						
surface ASME Y14.5	linear	0.X	±0.5	Amphenol FCI	title				20S + 5ACP				dwg no 10106119-5005001	rev	B				
		0.XX	±0.25													RA PF RECEPTACLE			
		0.XXX	±0.10																
	angular	0°	±2°		cat. no.				Product - Customer Drw							sheet 1 of 3			

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THIS PRODUCT MEETS EUROPEN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Rainbow Zhan		2014/10/23		projection		MM		size		A3		scale		3:2							
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu		2016/10/31						ecn no		ELX-DG-25114-1									
ASME Y14.5						chr		Fancy Zhang		2016/11/02																	
						appr		Pei-Ming Zheng		2016/11/02																	
						product family						PwrBlade+															
												rel level						Released									
surface				linear		0.X		±0.5		Amphenol FCI		title		20S + 5ACP		dwg no		10106119-5005001		rev		B					
																								0.XX		±0.25	
																								0.XXX		±0.10	
ASME Y14.5		angular		0°		±2°				cat. no.		Product - Customer Drw						sheet 3 of 3									