

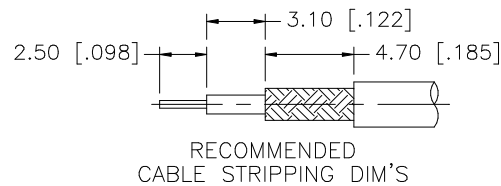
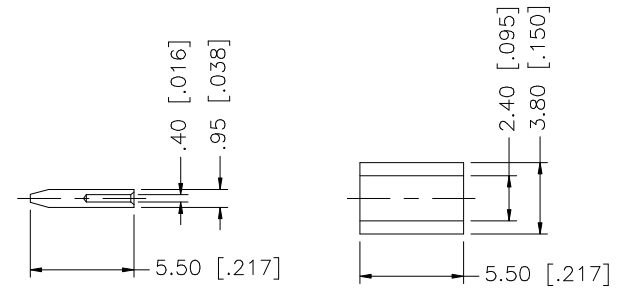
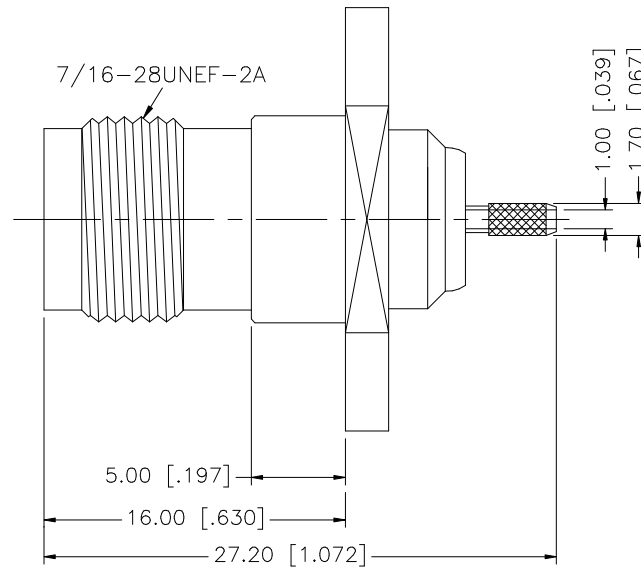


REV.	DATE	DESCRIPTION
NC	09/05/00	INITIAL RELEASE
A	10/01/06	UPDATE DRAWING FORMAT

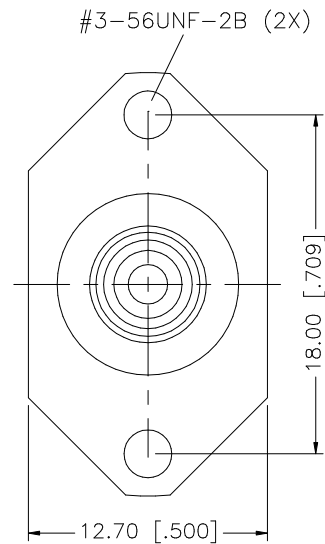

RECOMMENDED
MOUNTING HOLE

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex											
8						DRAWN	G.R.S.	10/02/06													
7						CHECKED															
6										PART DESCRIPTION											
5										TNC REVERSE POLARITY CRIMP JACK 2 HOLE PANEL (FOR RG-178B/U, 196A/U CABLE)											
4	FERRULE	COPPER	NICKEL	1						PART NO.											
3	CONTACT PIN	PHOS. BRONZE	GOLD	1						122459RP											
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO.											
1	BODY	BRASS	NICKEL	1					122459RP.DWG												
	DESCRIPTION	MATERIAL	FINISH	QTY					CAD FILE		C:/122/122459RP.DWG		DWG. NO.	122459RP.DWG		REV.	A	SIZE	A	SCALE	NA