
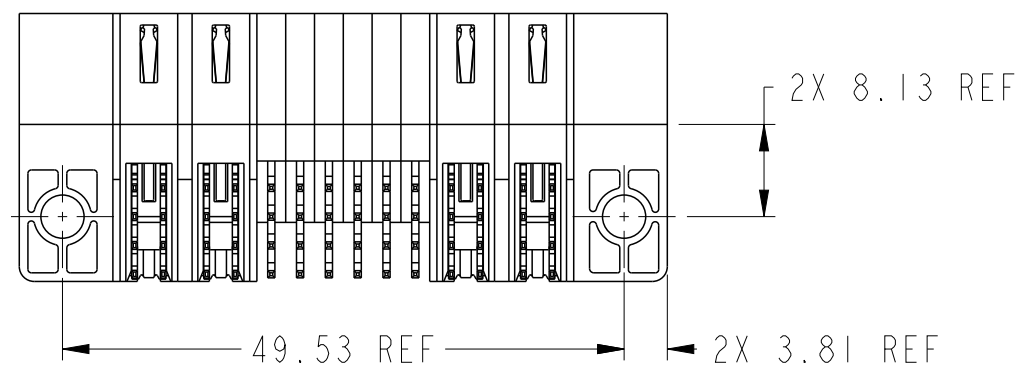
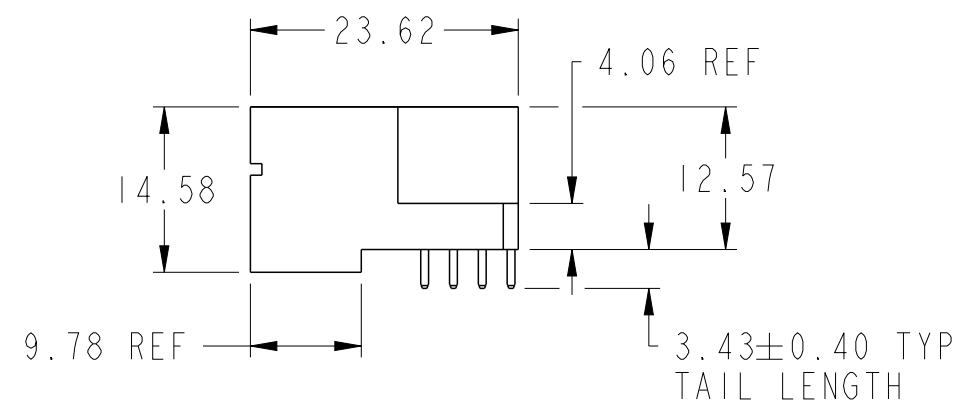
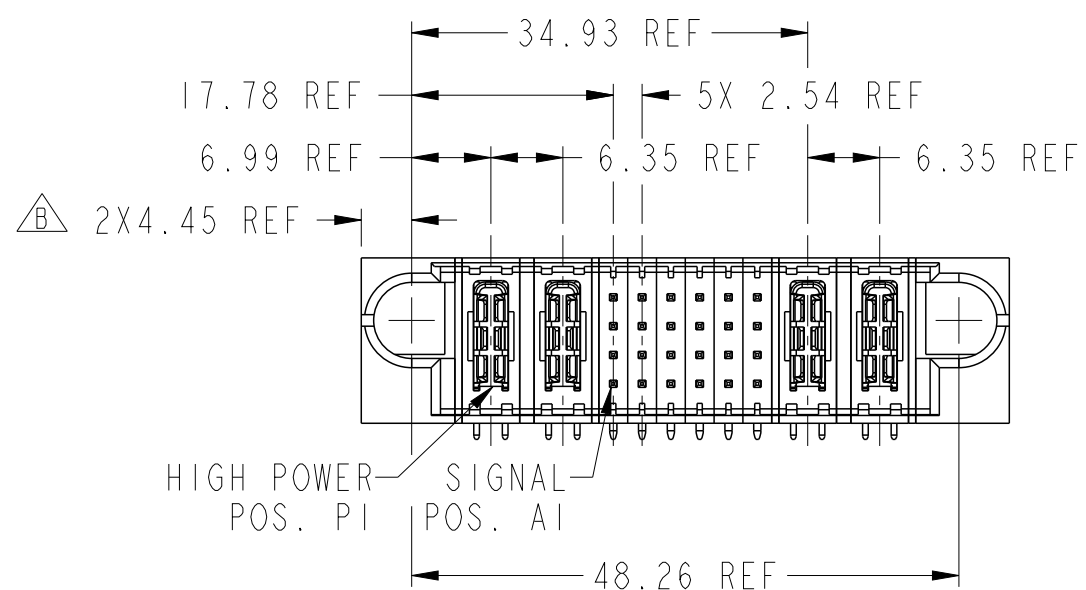
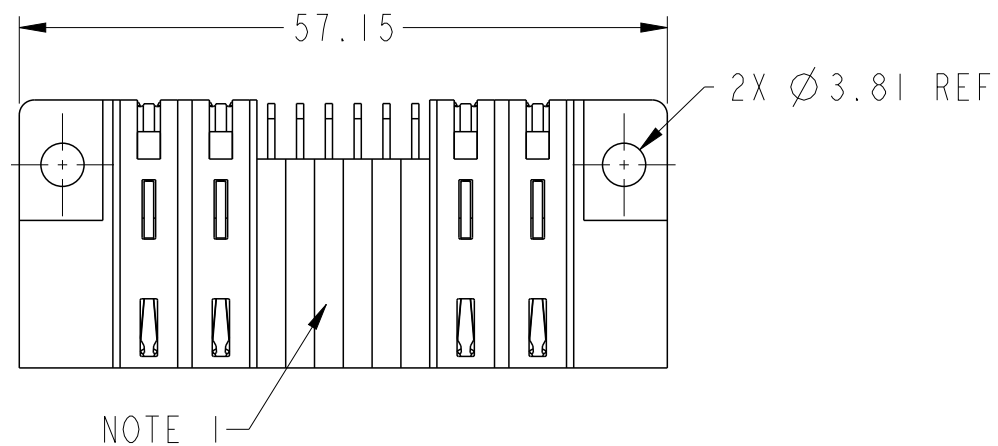


PRODUCT NUMBER SEE SHEET 2



spec ref *				dr Peng-Bing Fu 2012/07/09		projection 	MM 	size A3		scale 3:2		
tolerance std ASME Y14.5 TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Peng-Bing Fu 2012/11/14				ecn no ELX-DG-013143-1				
				chr Shao-Qi Kuang 2012/11/15								
				appr Pei-Ming Zheng 2012/11/15								product family PwrBlade+
surface ✓ ASME Y14.5		linear	0.X	±0.5		title 2HP + 24S + 2HP RA STB HEADER				dwg no 10106124-4006002	rev B	
			0.XX	±0.25								
			0.XXX	±0.10								
		angular	0°	±2°	www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 3	

A

B

C

D

A

B

C

D


NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- B

9) A

B

SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS
BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.



dr	Peng-Bing Fu	2012/07/09	projection	MM	size	scale
eng	Peng-Bing Fu	2012/11/14			A3	3:2
chr	Shao-Qi Kuang	2012/11/15			ecn no	ELX-DG-013143-1
appr	Pei-Ming Zheng	2012/11/15	product family	PwrBlade+	rel level	Released
		2HP + 24S + 2HP			dwg no	rev
www.fci.com		RA STB HEADER			10106124-4006002	B
cat. no.			Product - Customer Drw			sheet 3 of 3