
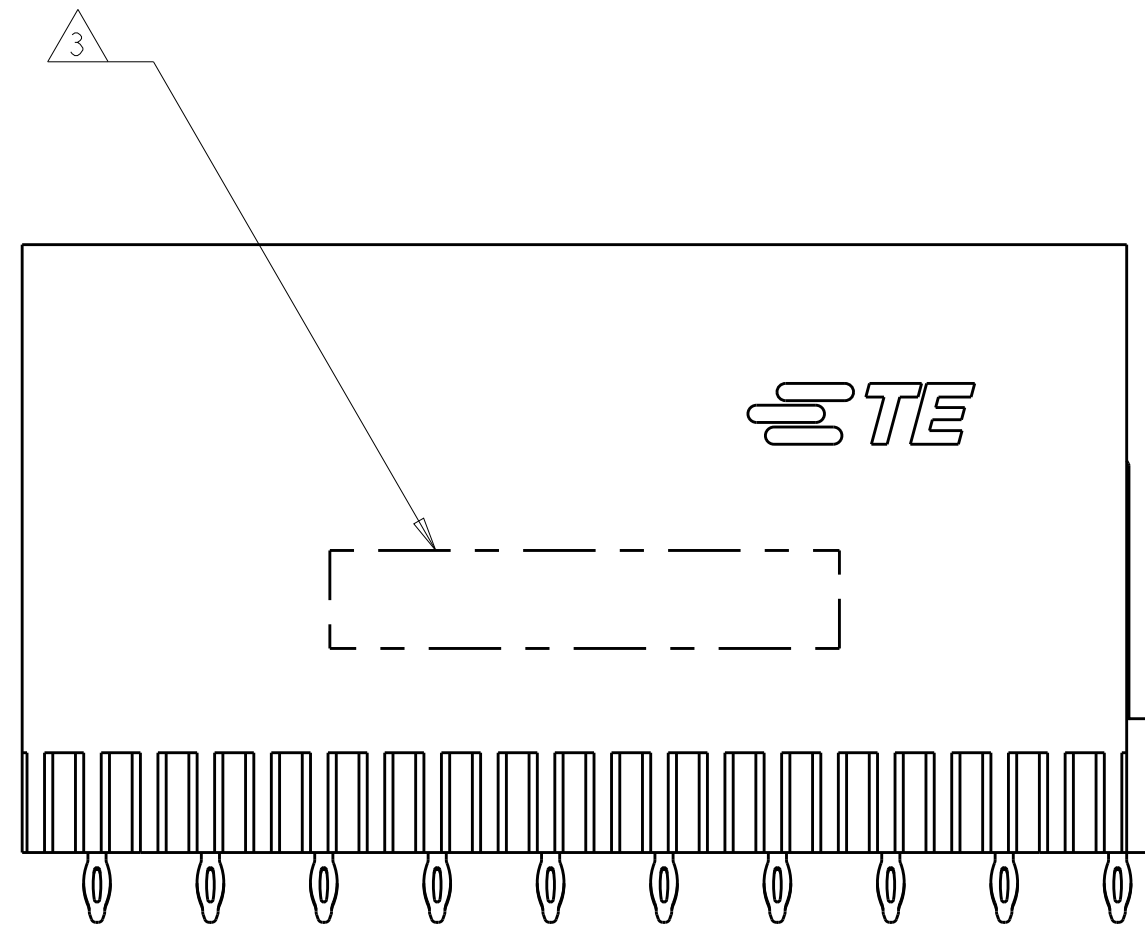
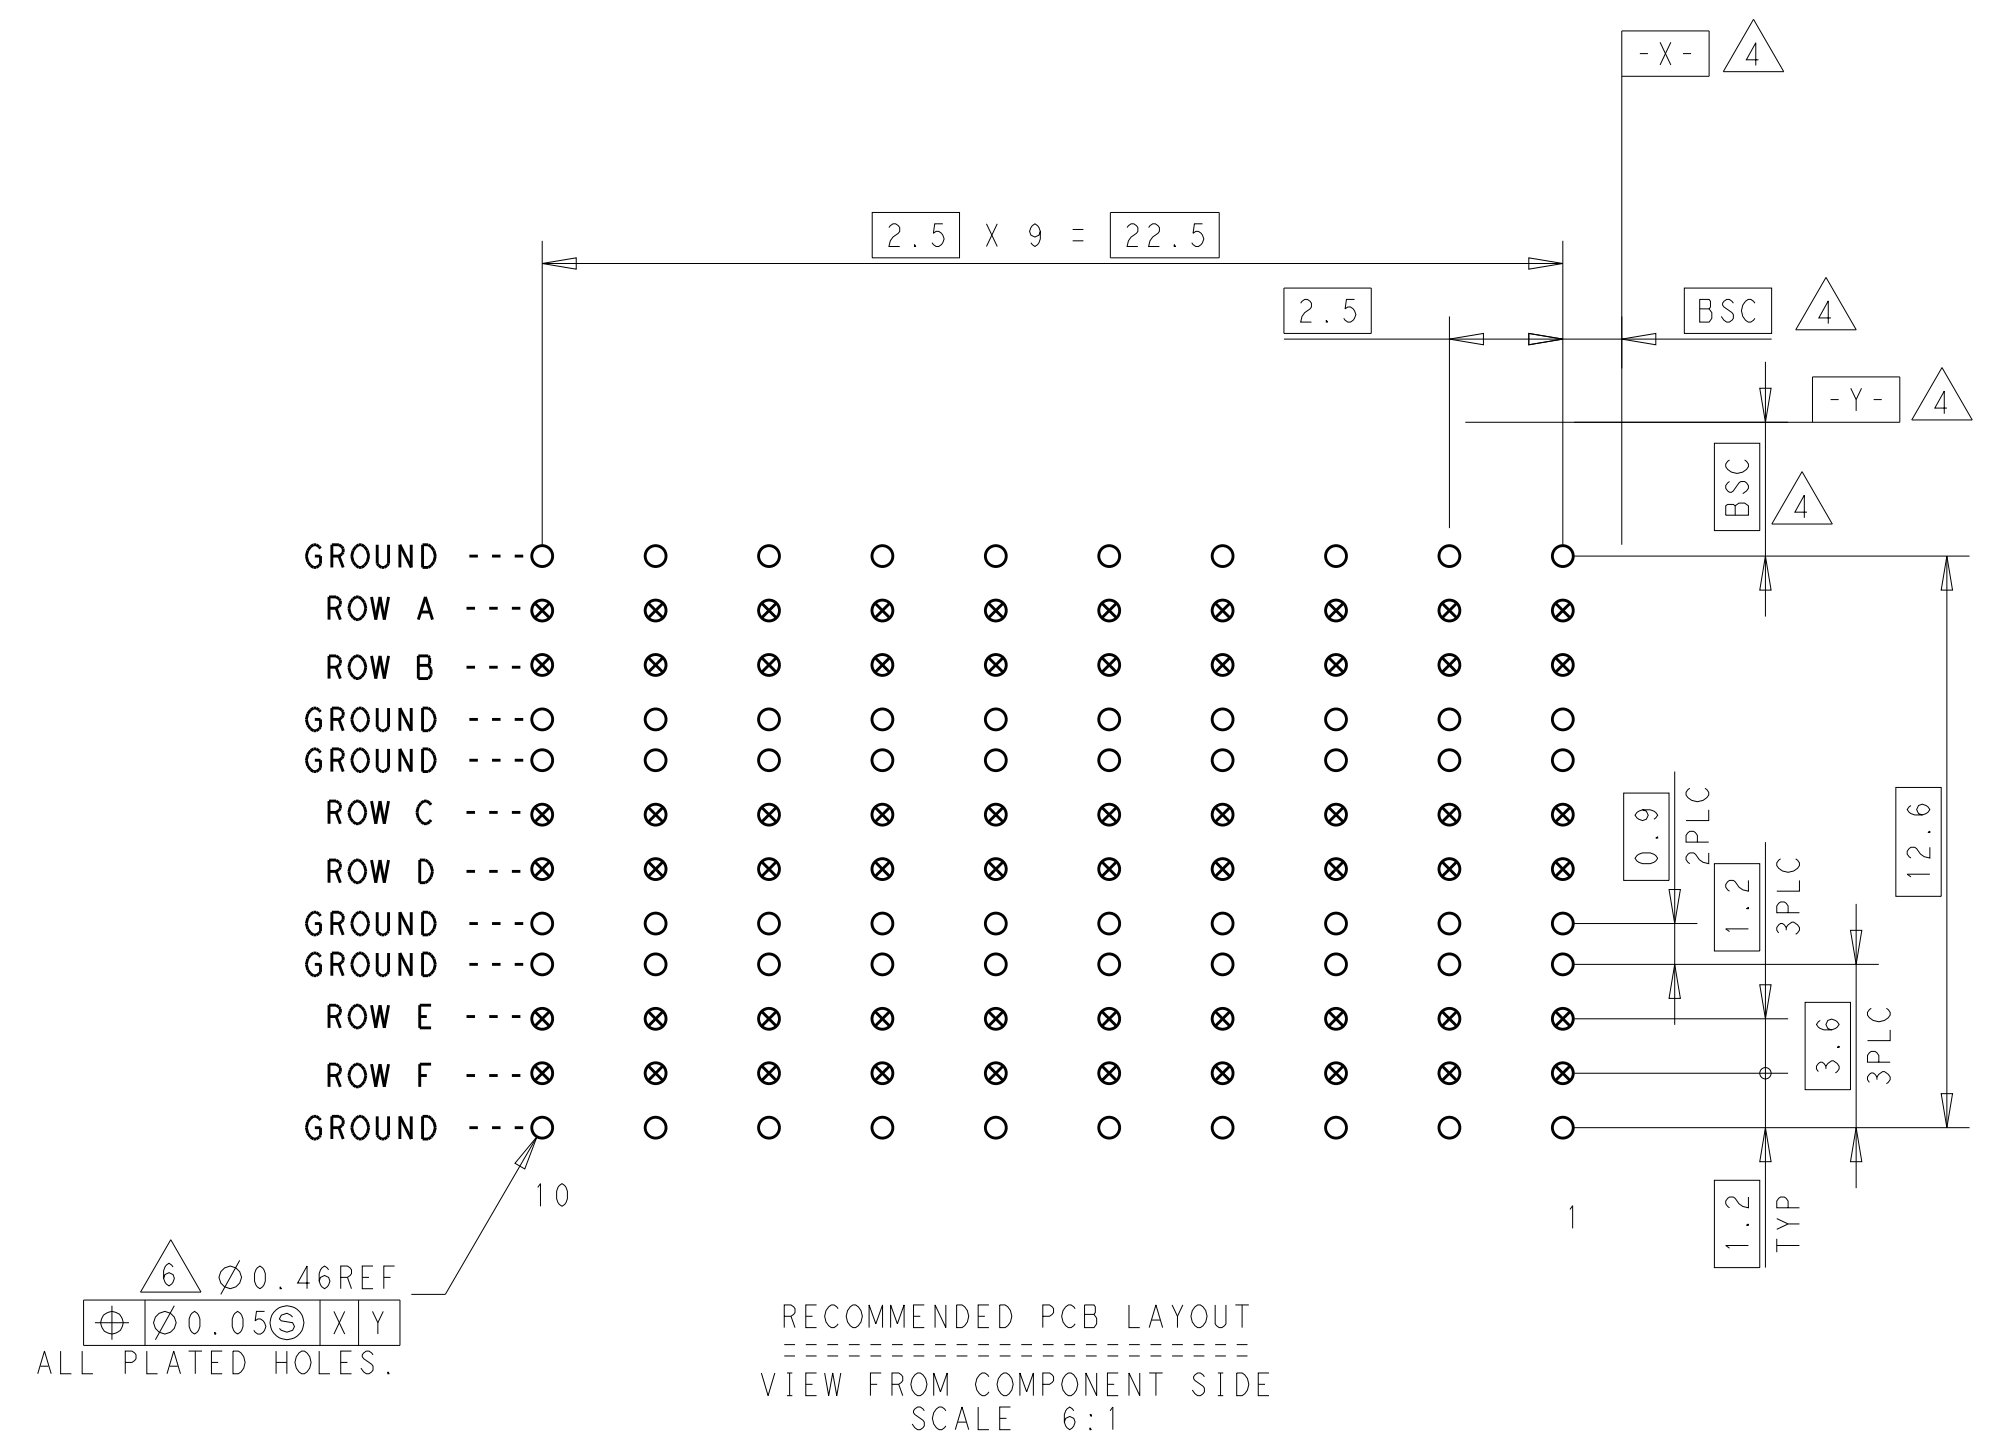
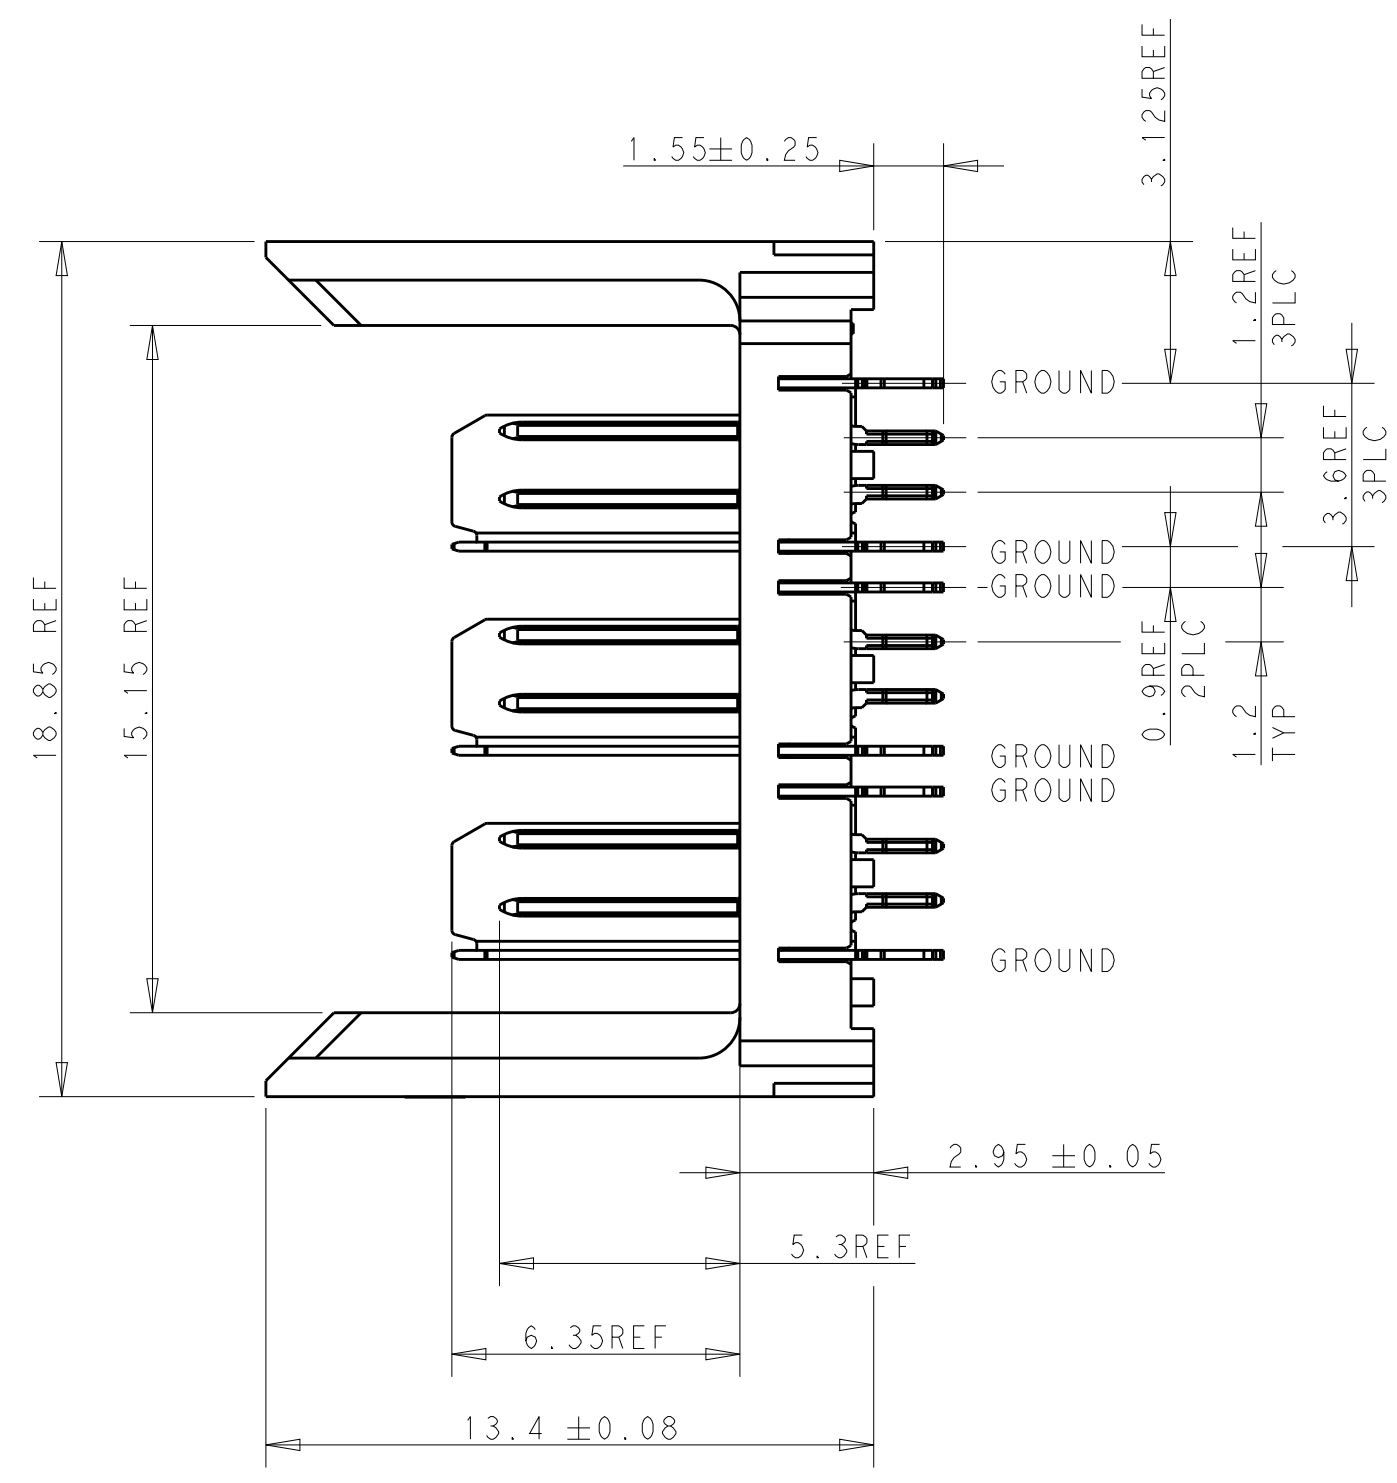


| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-------------------|-----------|-----------|------|--|--|
| P | LTN | DESCRIPTION | DATE | DMN | APVD | | |
| A | | INITIAL RELEASE | 4JAN2013 | D.S | A.C | | |
| B | | PER ECR-13-008109 | 20MAY2013 | D.S | M.Y | | |
| C | | PER ECO-18-007505 | 15MAY2018 | D.S | H.L | | |

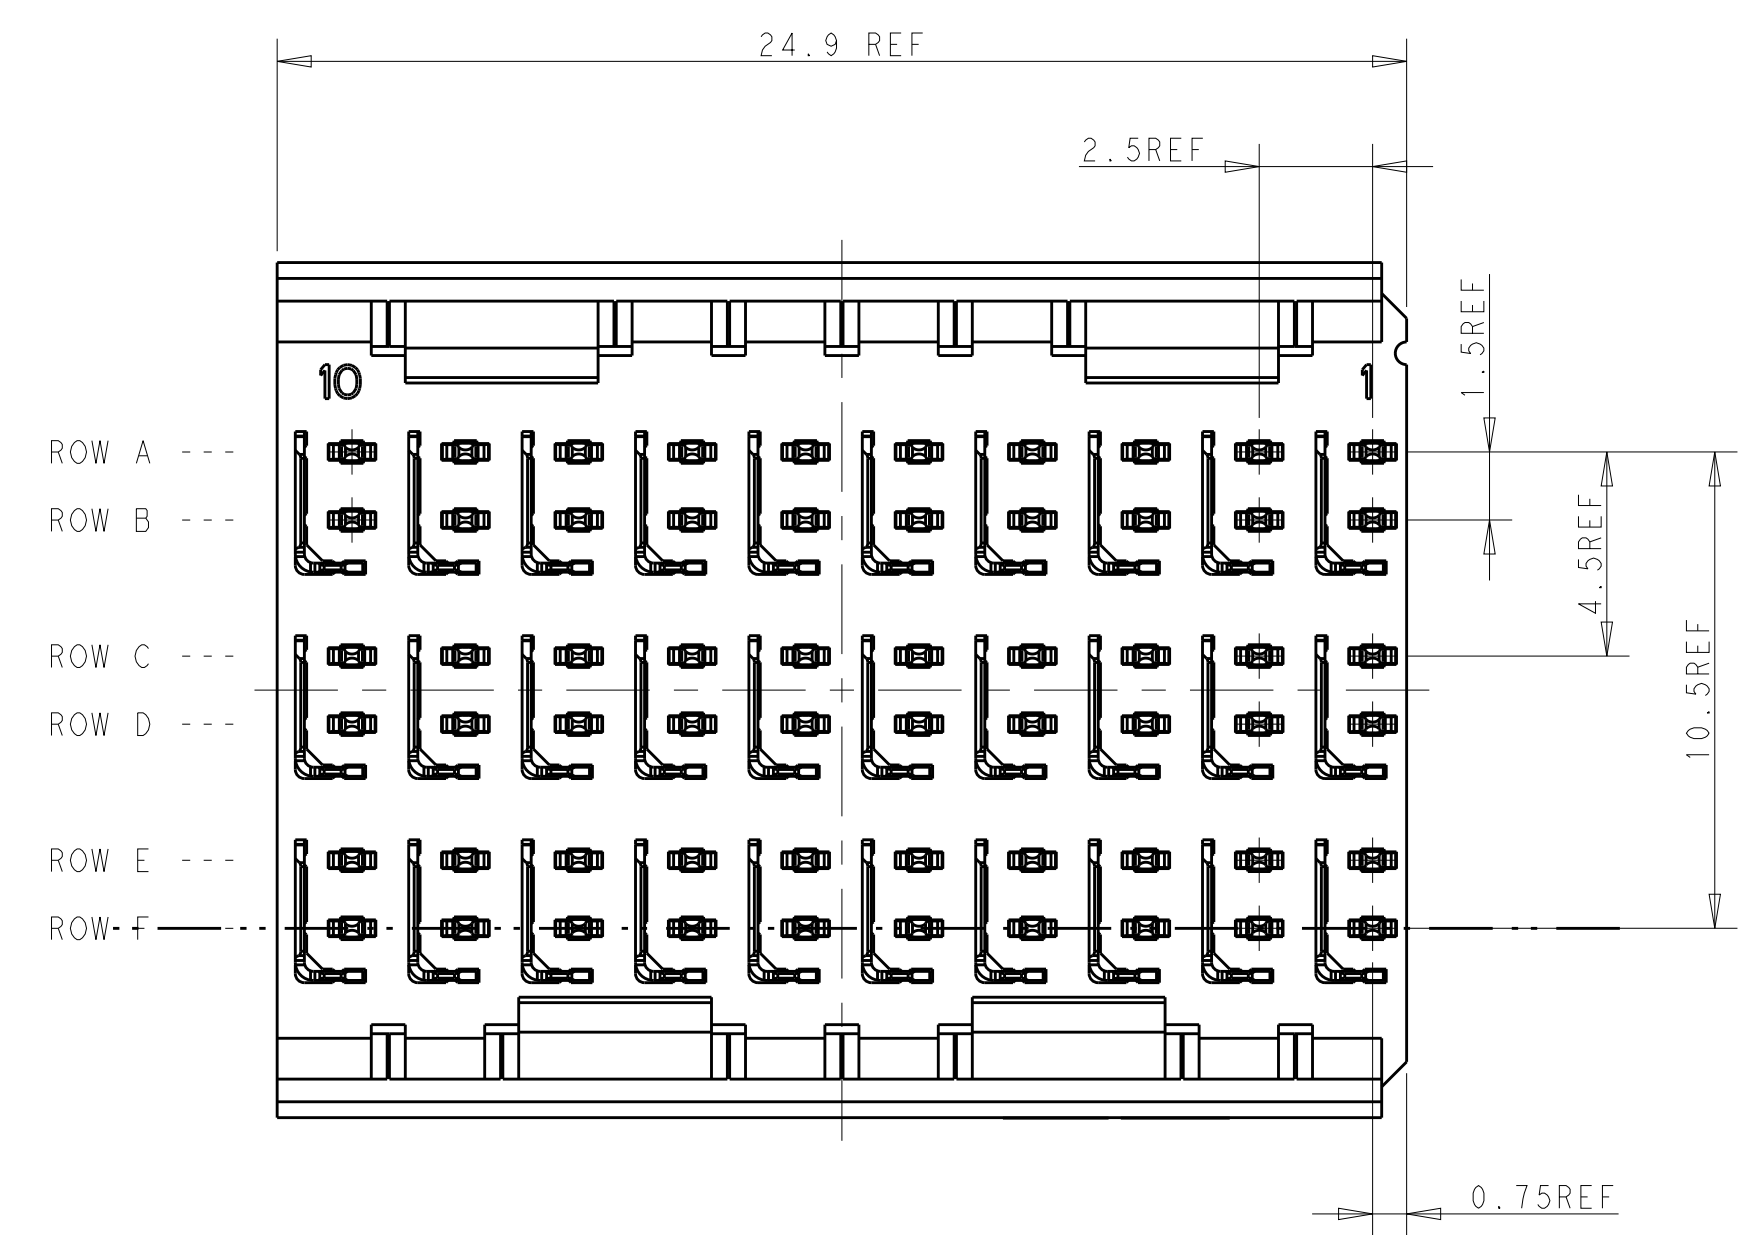

Ø0.46 REF
 Ø0.05 X Y
 ALL PLATED HOLES.

- 1 MATERIAL:
CONTACT AND SHIELD: PHOSPHOR BRONZE
HOUSING: THERMALPLASTIC, UL 94V-0
- 2 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055-1; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 um MIN MATTE
TIN OVER BASE PLATING
- 3 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE:
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 RECOMMENDED THRU HOLE DIAMETER AND PLATING THICKNESSES PLEASE
REFER TO APPLICATION SPEC 114-13059

2170245-1
 PART NO.

| | | | | | | | |
|-----------------------|--|--|--|--|--|---|--|
| DIMENSIONS: mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ± 1-PLC ±0.25 2-PLC ± 3-PLC ± 4-PLC ± 5-PLC ± 6-PLC ± FINISH | | DWN DAVID SHEN 29MAR2012 CHK SANDERS YAN 29MAR2012 APVD ALEY CAI 29MAR2012 | | NAME ASSEMBLY DRAWING 3 PAIR, 10 COLUMN, VERTICAL HM ZD+, HEADER | |
| MATERIAL: 1 | | FINISH: 2 | | PRODUCT SPEC 108-2055-1 | | SIZE CAGE CODE DRAWING NO A1 C=2170245 | |
| CUSTOMER DRAWING | | WEIGHT: 114-13059 | | RESTRICTED TO | | SCALE 6:1 SHEET 1 OF 1 REV C | |