


Jacks

163-5012, 163-5013

KOBI CONN

Jacks

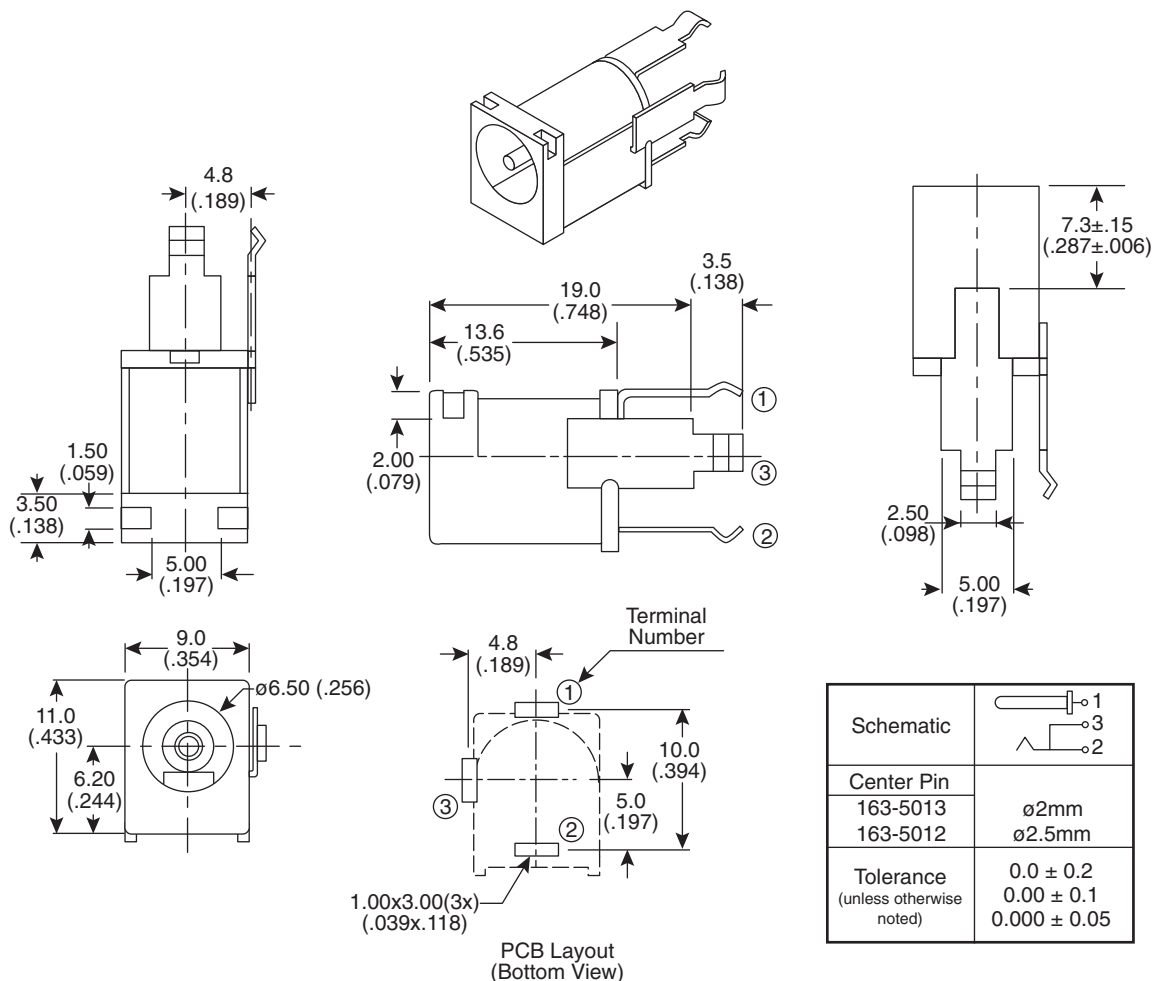

DIMENSIONS: mm (in.)

SPECIFICATIONS

Type:	PC mount DC power, DIP
Contact resistance:	Normally closed terminals shall not exceed 0.03Ω when measured at a current of one Ampere by Voltage drop method.
Insulation resistance:	Adjacent open terminals shall not be less than $50M\Omega$ when measured w/ 500V resistance meter
Connector:	Withstands 500VRMS between adjacent open terminal for 1 minute. Shall Withstand 5,000 cycles of insertions and withdrawal with testing plug, contact resistance shall not exceed 0.1Ω
Rated voltage:	16V DC max.
Rated current:	2.5 A

MATERIALS

Center Pin:	Copper
Terminal 1:	Brass
Terminal 2:	Copper Alloy
Terminal 3:	Brass
Housing:	PBT
Cover:	PBT

Date Last Revised: 3-25-10

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-300386

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

163-5012, 163-5013