

Cable duct - CD-HF 100X100 BU - 3240606

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable duct, blue, halogen-free, comprising upper part and mounting base, width: 100 mm, height: 100 mm, length: 2000 mm



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	6 pc
Custom tariff number	39259020
Country of origin	Germany

Technical data

Dimensions

Length (b)	2000 mm
Width (a)	100 mm
Height	100 mm

General

Color	blue
Components	Halogen-free
Flammability rating according to UL 94	V0
Material	PC/ABS

Standards and Regulations

Halogen-free	yes
Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0

Cable duct - CD-HF 100X100 BU - 3240606

Classifications

eCl@ss

eCl@ss 4.0	27140602
eCl@ss 4.1	27140602
eCl@ss 5.0	27140602
eCl@ss 5.1	27140602
eCl@ss 6.0	27400703
eCl@ss 7.0	27400703
eCl@ss 8.0	27400703

ETIM

ETIM 4.0	EC000012
ETIM 5.0	EC000012

UNSPSC

UNSPSC 6.01	30101815
UNSPSC 7.0901	30101815
UNSPSC 11	30101815
UNSPSC 12.01	30101815
UNSPSC 13.2	30101815

Approvals

Approvals


Approvals

CSA / VDE Zeichengenehmigung

Ex Approvals

Approvals submitted

Approval details



Cable duct - CD-HF 100X100 BU - 3240606

Approvals

VDE Zeichengenehmigung 

Accessories

Accessories

Filler plug

Fastening clip - RVT-PA 4 - 3240498



Plastic body-bound rivet, for hole diameter of 4 mm and a material thickness of 1.5 ... 6 mm

Fastening clip - RVT-PA 6 - 3240499



Plastic body-bound rivet, for hole diameter of 6 mm and a material thickness of 1.5 ... 6 mm

Riveting tools

Tool - UNIFOX-RVT P 4 - 1212478



Rivet setting tool, for use with RVT-PA 4 plastic body-bound rivets

Tool - UNIFOX-RVT P 6 - 1212509




Rivet setting tool, for use with RVT-PA 6 plastic body-bound rivets

Cable duct - CD-HF 100X100 BU - 3240606

Drawings

Dimensional drawing

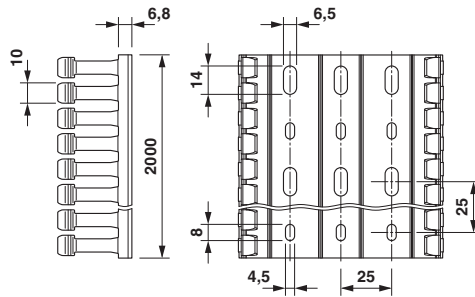

Base perforation according to DIN EN 50085