

Network cable - VS-IP20-IP20-93E/0,3 - 1404347

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 26 stranded (7-wire), RAL 5021 (water blue), RJ45 connector/IP20 on RJ45 connector/IP20, line, length 0.3 m



Key commercial data

Packing unit	1 pc
Custom tariff number	85444210
Country of origin	Poland

Technical data

Mechanical characteristics

Number of positions	4
Number of slots	1
Shielded	Yes
Insertion/withdrawal cycles	≥ 750
Cable diameter	6.70 mm
Cable exit	straight
Cable structure	2x2xAWG26/7; SF/UTP
Length of cable	0.3 m

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C (cable, fixed installation)
	-5 °C ... 60 °C (cable, flexible installation)
Degree of protection	IP20

Material data

Inflammability class according to UL 94	V2
Outer sheath, material	PUR
External sheath, color	water blue RAL 5021

Network cable - VS-IP20-IP20-93E/0,3 - 1404347

Technical data

Electrical characteristics

Transmission characteristics (category)	CAT5 (IEC 11801:2002)
---	-----------------------

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27060307
eCl@ss 6.0	27060390
eCl@ss 7.0	27060390

ETIM

ETIM 3.0	EC000830
ETIM 4.0	EC002599
ETIM 5.0	EC002599

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501


Drawings

Cable cross section



PUR ETHERNET 2x2 FLEX [93E]

Circuit diagram

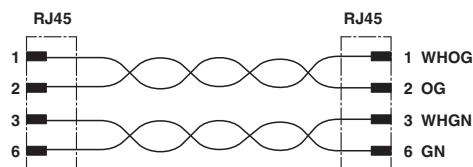

Network cable - VS-IP20-IP20-93E/0,3 - 1404347

Dimensional drawing

