
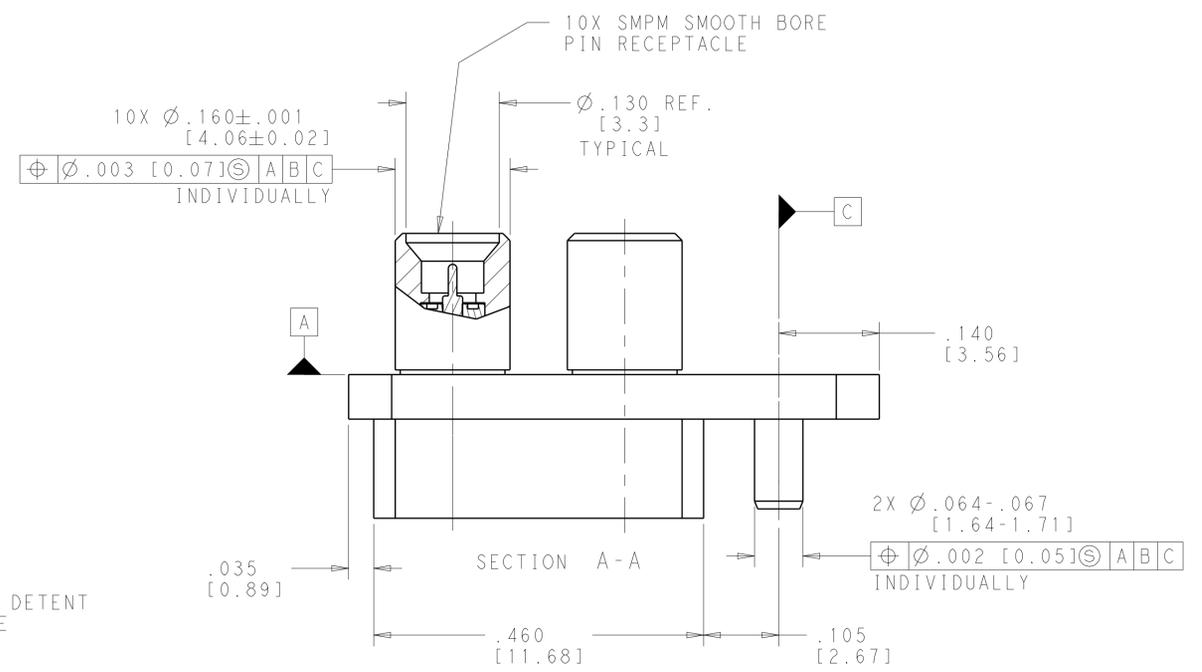
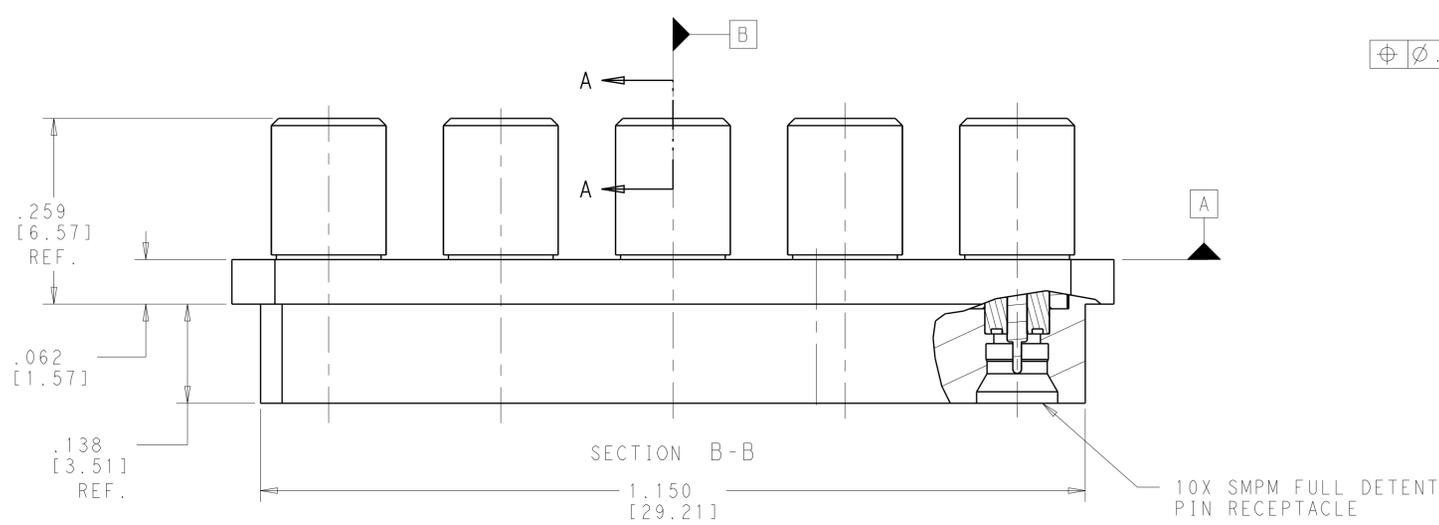
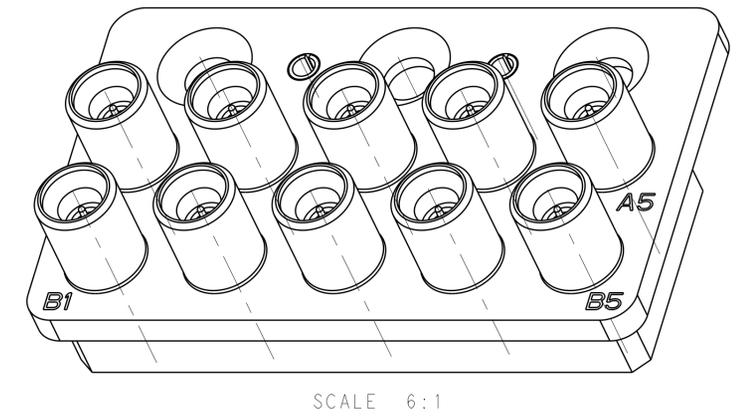


LOC	DIST	REV	DATE	BY	APPV
-	-	A	23MAY2008	STM	STM
-	-	B	12MAY2013	STM	STM

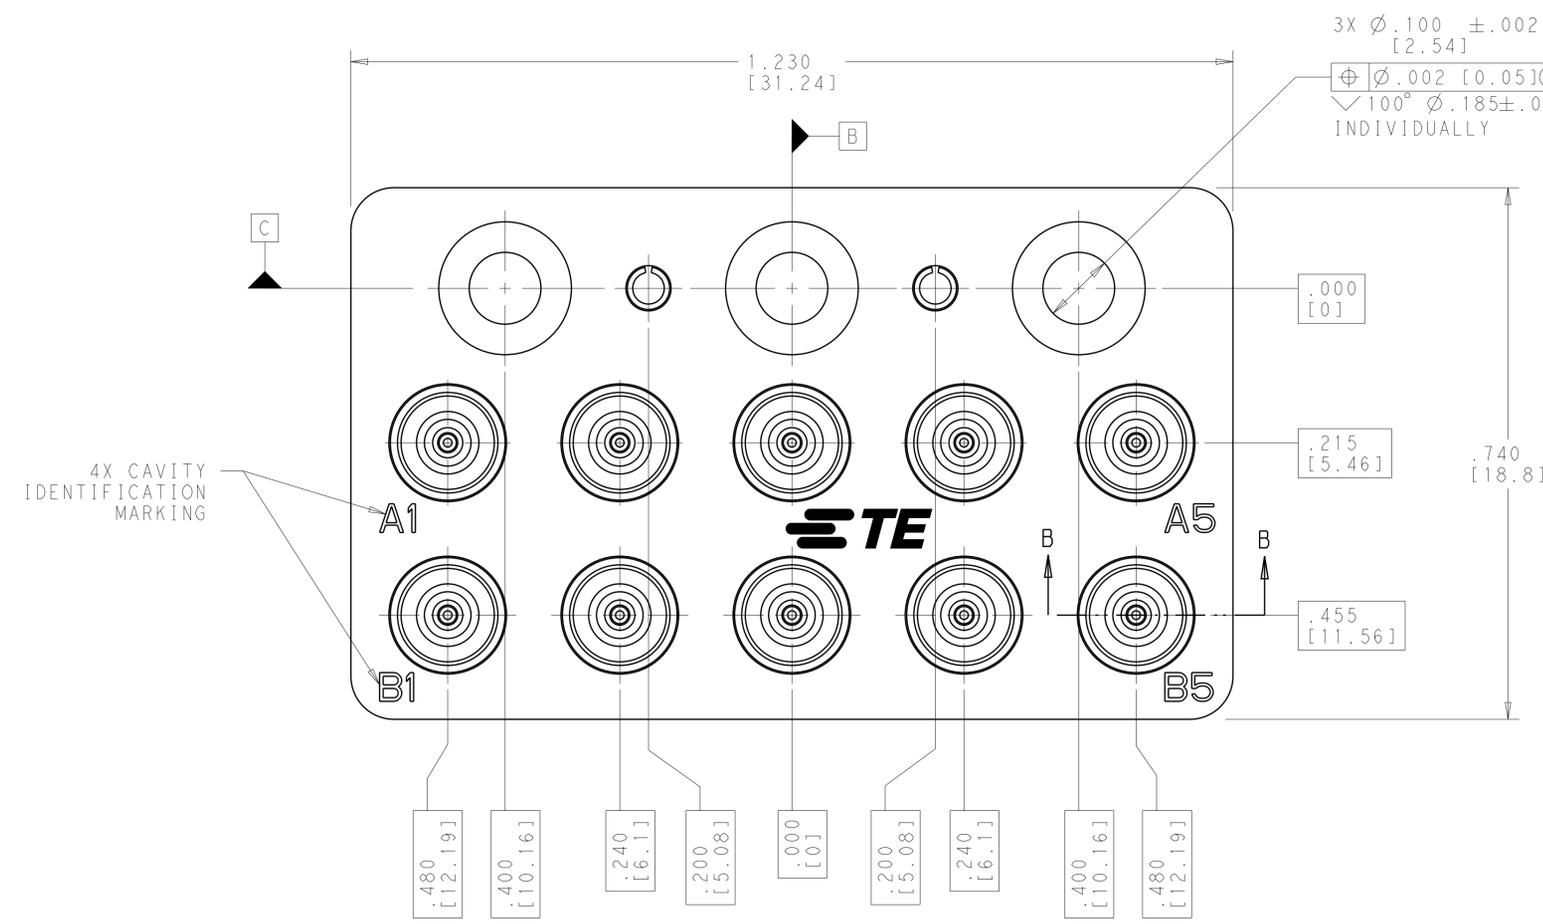

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL, ALLOY UNS S30300 PER ASTM A 582	PASSIVATE PER AMS QQ-P-35
SMPM SMOOTH BORE BUSHINGS	BERYLLIUM COPPER ALLOY UNC C17300 PER ASTM B 196 (TD04)	00005 MIN. THICK GOLD PLATE PER ASTM B 488 OVER .0001 MIN THICK NICKEL PLATE, PER AMS QQ-N-290 OVER COPPER FLASH
CENTER CONTACTS	BERYLLIUM COPPER ALLOY UNC C17300 PER ASTM B 196 (TH04)	
INSULATORS	POLYTETRAFLUOROETHYLENE (PTFE)	N/A
SLOTTED SPRING PINS	NICKEL STAINLESS STEEL WORK HARDENED	PASSIVATE PER AMS QQ-P-35

THIS PRINT IS
PRELIMINARY
 UNQUALIFIED PRODUCT CONTACT PRODUCT ENGINEERING BEFORE USING THIS PRINT

1996769-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009. TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS: [INCHES/mm]	0 PLC $\pm .1$	1 PLC $\pm .01$	2 PLC $\pm .002$	3 PLC $\pm .0005$	4 PLC $\pm .0005$	ANGLES $\pm 1.0^\circ$
-------------------------	----------------	-----------------	------------------	-------------------	-------------------	------------------------

MATERIAL: FINISH:

OWN: S T McJLey 27MAY2008
 CH: S McJLey 28JUG2011
 APV: S McJLey 12AUG2011

PRODUCT SPEC: 10 POSITION RF BACKPLANE MODULE SMPM FULL DETENT (M) RECEPTACLES

SIZE: CAGE CODE DRAWING NO: A100779 C=1996769
 WEIGHT: 31.5g

Customer Drawing SCALE 8:1 SHEET 1 OF 1 REV B