

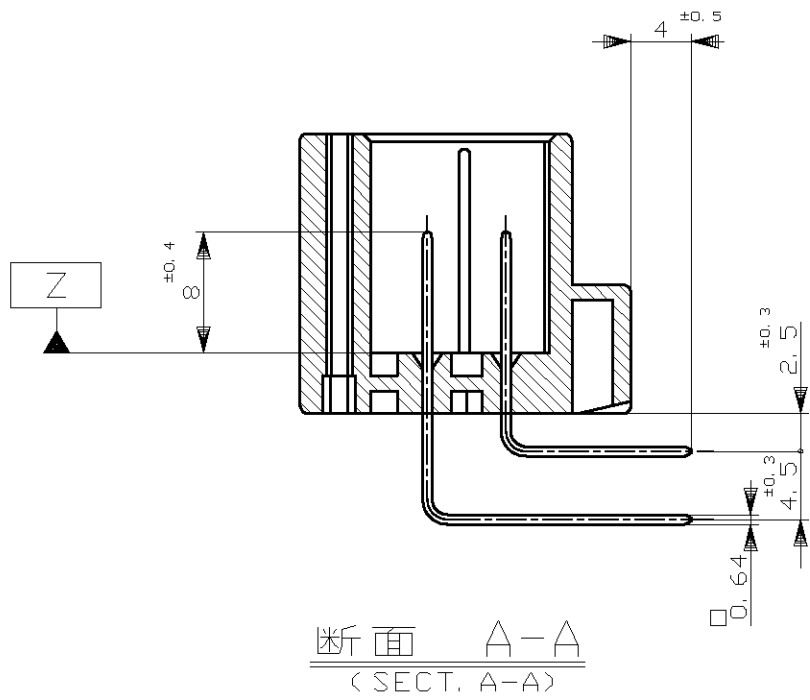
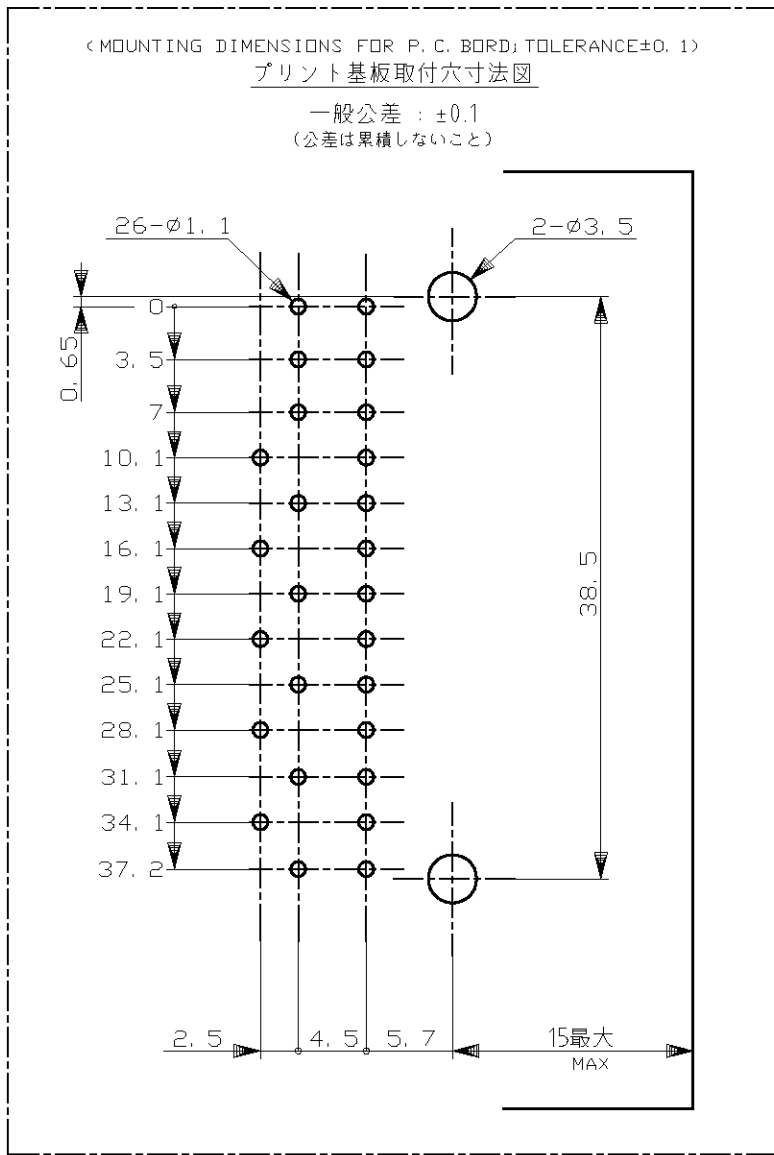
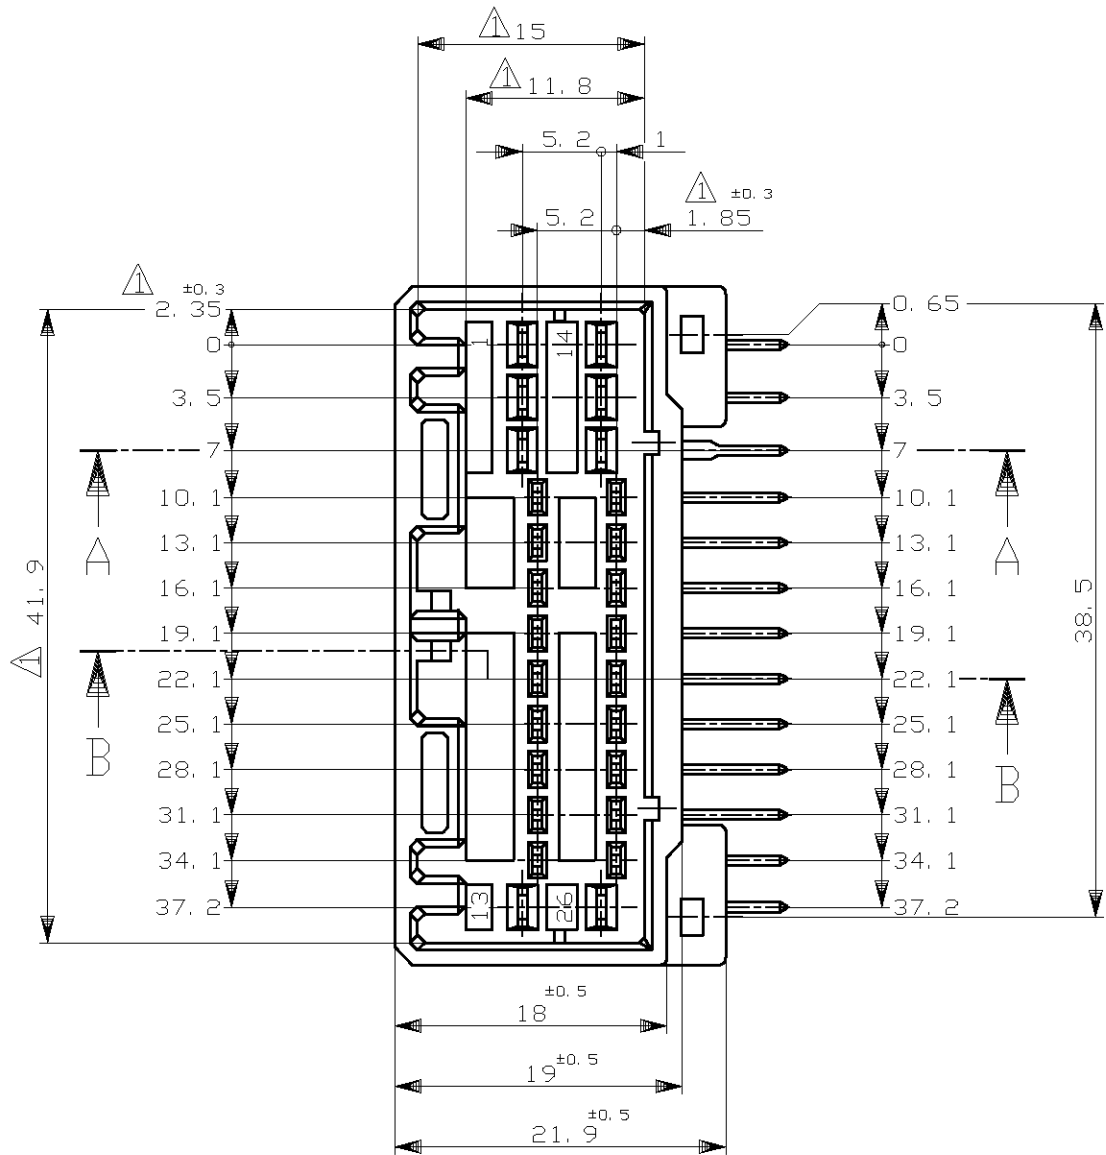
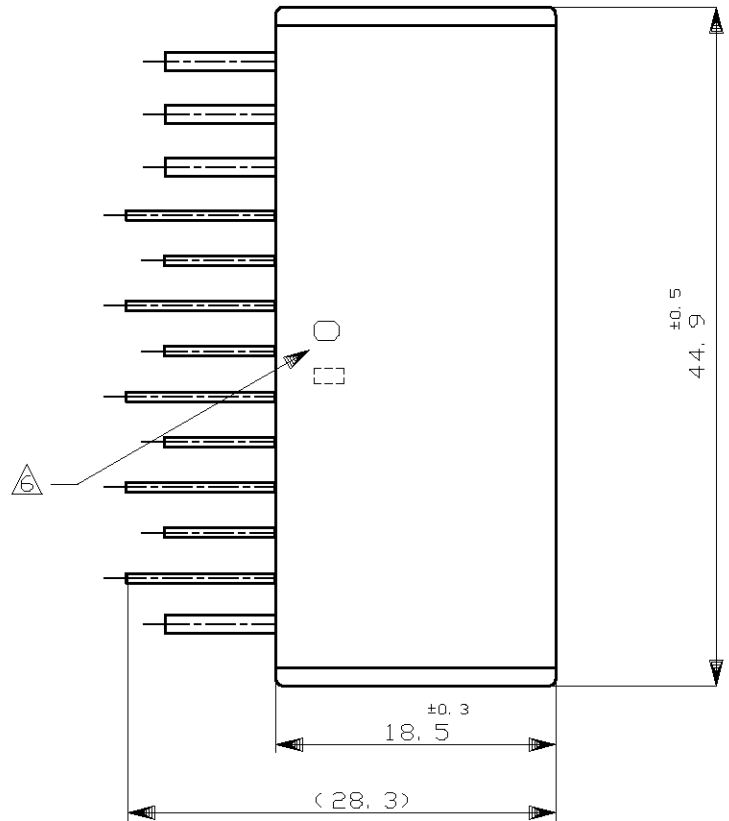


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	—		H2	REVISED	ECR-11-010934	15JUL11	TS	KB

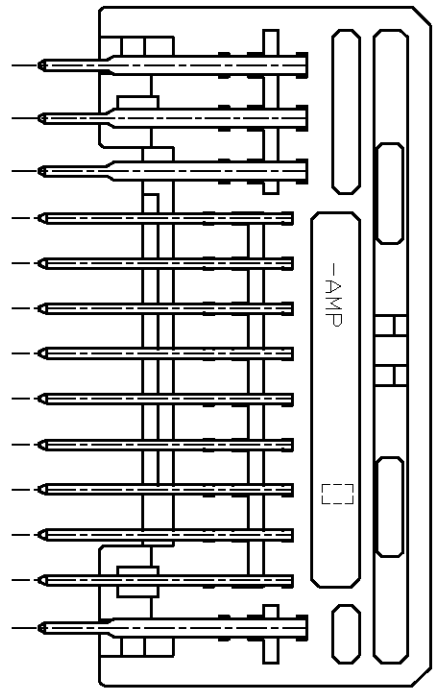


断面 A-A
(SECT. A-A)

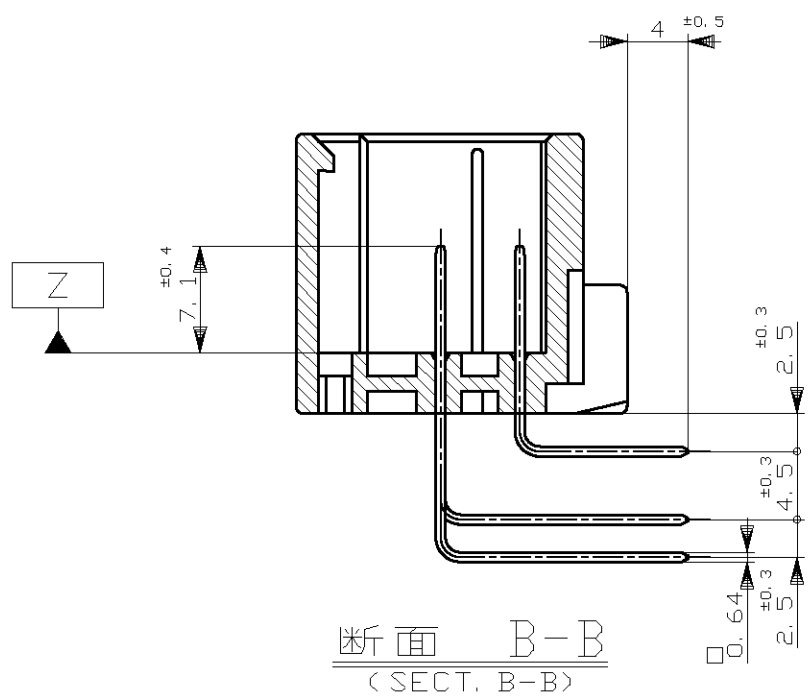

断面 B-B
(SECT. B-B)

- △ **[Z]** 面から2mmの範囲で測定
2. 嵌合相手ハウジング型; 176204, 917997
3. 推奨取付ねじ; JIS B1115, B1122 タッピングねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m(4Kg-cm)以下)
4. 適用製品規格番号; 108-5280, 108-5342
- △ 回路番号
- パワー回路 1 ~ 8
シグナル回路 9 ~ 26
- △ 適用製品型番のブリフィックス及びIDマークを
カラーホットマークにて表示
- △ MUST BE KEPT BETWEEN **[Z]** AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 176204, 917997
- 3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH<MAX.>
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
<TIGHTENING TORQUE; 0.4N-m(4Kg-cm)MAX.>
- 4 APPLICABLE PRODUCT. SPEC NO.; 108-5280, 108-5342
- △ CIRCUIT NUMBER
- POWER CIPCUIT NO. 1 ~ 8
SIGNAL CIRCUIT NO. 9 ~ 26
- △ INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY HOT MARK

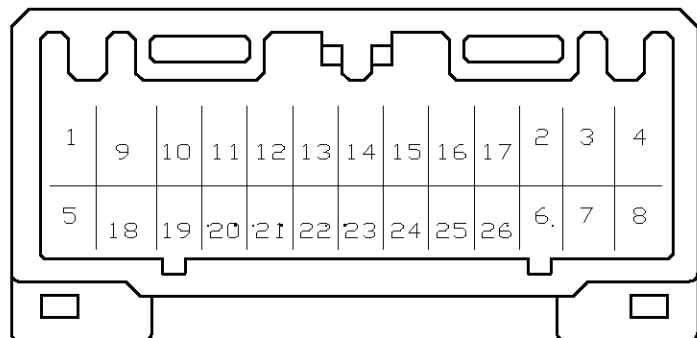

51	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 26	1 ~ 8	9 ~ 26	ORANGE	1-5176206-8
1	TIN-LEAD	SELECTIVE GOLD × 26	1 ~ 8	9 ~ 26	ORANGE	1-176206-8
1	TIN-LEAD	SELECTIVE GOLD × 26	1 ~ 8	9 ~ 26	WHITE	1-176206-1
3	TIN-LEAD	SELECTIVE GOLD × 2	-	18, 23	LIGHT GRAY	3-176206-9
2	TIN-LEAD	SELECTIVE GOLD × 3	-	18, 22, 23	LIGHT GRAY	2-176206-6
0	TIN-LEAD	SELECTIVE GOLD × 2	-	-	WHITE	176206-1
△ MARKING	SOLDERING SIDE 半田付け面	CONTACT SIDE 接触部側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	COLOR 色	PART NUMBER 製品型番
	CONTACT FINISH コンタクト仕上		△ GOLD PLATED CIRCUIT NO. 金めっき回路番号			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10 ± 0.2
30 ± 0.25
100 ± 0.3
ANGLE ± 0.3°

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH
SEE TABLE

MATERIAL

HOUSING : PBT
CONTACT : BRASS

DWN
T.SHINOHARA
26APR10

CHK
K.BETSUI
26APR10

APVD
K.BETSUI
26APR10

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

040/070 SERIES HYBRID I/O CONNECTOR
26POSITION CAP HOUSING ASSEMBLY

SIZE
A2

CAGE CODE
00779

DRAWING NO.
C=176206

RESTRICTED TO

SCALE
2:1

SHEET
1 of 1

REV
H2