

Basler Accessories



Technical Specification

POWER CABLE HRS 6P/OPEN

Order Numbers

2000029758

Document Number: AW001132

Version: 03 Language: 000 (English)

Release Date: 29 August 2017

Contacting Basler Support Worldwide

Europe, Middle East, Africa

Basler AG
An der Strusbek 60–62
22926 Ahrensburg
Germany

Tel. +49 4102 463 515
Fax +49 4102 463 599

support.europe@baslerweb.com

The Americas

Basler, Inc.
855 Springdale Drive, Suite 203
Exton, PA 19341
USA

Tel. +1 610 280 0171
Fax +1 610 280 7608

support.usa@baslerweb.com

Asia-Pacific

Basler Asia Pte. Ltd.
35 Marsiling Industrial Estate Road 3
#05–06
Singapore 739257

Tel. +65 6367 1355
Fax +65 6367 1255

support.asia@baslerweb.com

www.baslerweb.com

**All material in this publication is subject to change without notice and is copyright
Basler AG.**

Order Number	Description	Applicable Cameras
2000029758	Power Cable with HRS 6-pin connector and open end, 10 m	aviator CL, racer, runner

Table 1: Cable Type

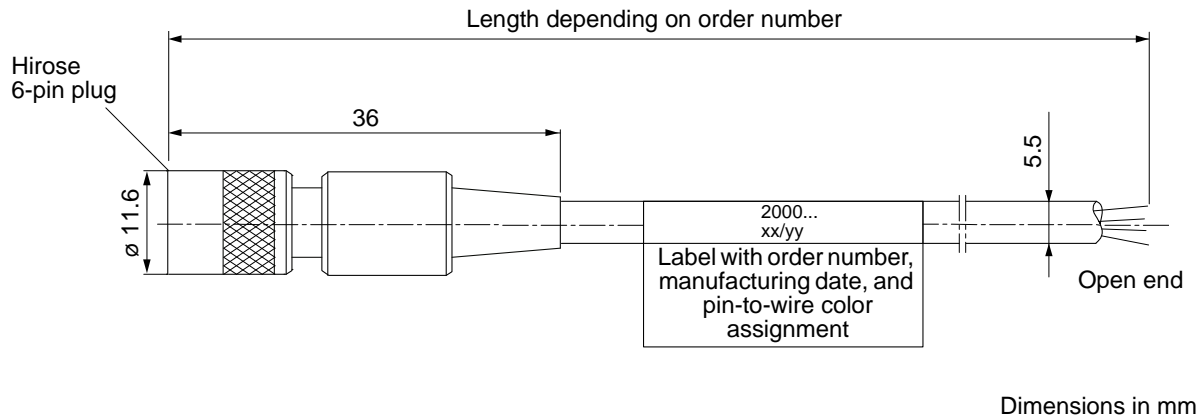



Fig. 1: Cable Overview

	<p>⚠ CAUTION</p>
	<p>Personal Injury Hazard and Risk of Damage to Camera in Case of Short Circuits</p> <p>Short circuits may cause an extreme rise in temperature of the camera’s housing. This may damage the camera and may also lead to personal injuries, e.g., burns if touching the housing. In the worst case, the overheating may cause a fire.</p> <p>In order to prevent that, you should take additional measures to limit the current flowing through each individual wire during a short circuit. The maximum current allowed is 2 A. There are two ways how to do this:</p> <ul style="list-style-type: none"> ■ Using a fuse ■ Using a limited power supply

Wiring Information

Pin Number	Wire Color	Function
1	Brown	Camera Power
2		Camera Power
3		Not connected
4		Not connected
5	White	Camera Power Ground
6		Camera Power Ground

Table 2: Wiring Information

For more details, see the respective camera user's manual.

Physical Specifications

Camera-Side Connector	Hirose, 6 pin [HR10A-7P-6S (73)]
Host-Side Connector	None, open end
Cable Cross-Section	2 x 2 x 0.5 mm ² (close to AWG 21)
Cable Diameter	5.5 mm
Wire Insulation	PVC
Outer Jacket	PVC
Minimum Bending Radius	27.5 mm (5 x cable diameter), fixed installation
Maximum Bending Cycles	None (fixed installation only)
Suitable for Drag Chain Applications	No
Suitable for Robotics Applications	No

Table 3: Physical Specifications

Electrical Specifications

Maximum Operating Voltage	See camera user's manual
Wire Resistance	≤250 Ω/km

Table 4: Electrical Specifications

Environmental Specifications

Operating Temperature Range	-25–80 °C (not moving)
-----------------------------	------------------------

Table 5: Environmental Specifications

Plug Specifications

Durability	>1000 mating cycles
Contact Resistance	max. 10 mΩ
Contact Plating	Silver
Protection Rating	IP40
Plug Insulation Material	Polyamide/PBT

Table 6: Plug Specifications

General Information

RoHS Compliance	Yes
CE Conformity	Yes (RoHS)
UL Conformity	No
Warranty	1 year

Table 7: General Information



The cables are intended for use with the cameras specified in [Table 1](#) only.

Read the camera user's manual including the safety warnings before connecting the cable to the camera. The user's manual also contains further information about pin assignments, power requirements, as well as comprehensive information about installing and using the camera.

You can download the user's manual and related documents for your camera free of charge from the Basler website: www.baslerweb.com

Revision History

Doc. ID Number	Date	Changes
AW00113201000	24 Nov 2011	Initial release of this document.
AW00113202000	22 Jan 2015	New cover photo. Changed the layout of the document. Added technical specifications in tables Table 2 to Table 7 .
AW00113203000	29 Aug 2017	Added warning about additional short circuit protection on page 1 .