



Technical drawing of a 16-pin D-sub connector. The drawing includes two views: a top view and a side view.

Top View Dimensions:

- Overall width: 36
- Distance from center to pin 1: 34.58
- Distance between pin 1 and pin 16: 32.4
- Pin pitch: 1 (PITCH)
- Distance from center to pin 8: $(64/2) - 1 = 31$
- Central mounting hole diameter: $\varnothing 3.0$
- Distance from center to pin 8 (alternative measurement): 32.6
- Overall width (alternative measurement): 34


Side View Dimensions:

- Overall height: 0.7
- Pin diameter: $\varnothing 1.2$
- Overall length: 34.4

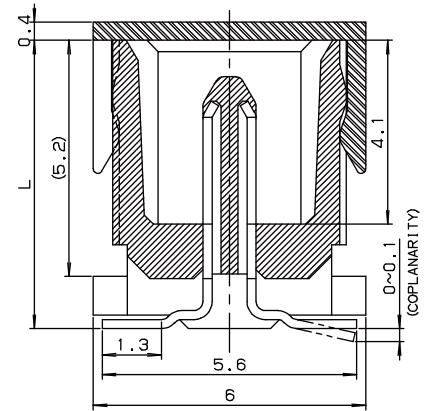


SECT. A-A

VARIATION	L
Standard	6.25
H2	8.25

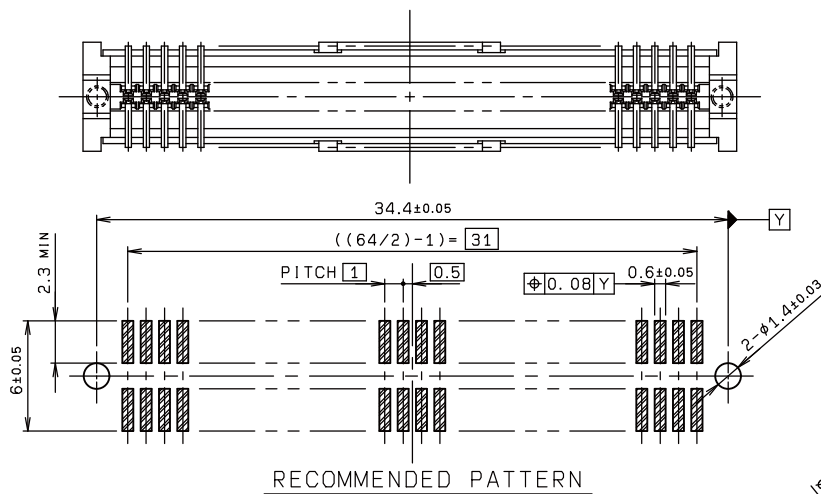

Type	R	S	T
Standard	8.05	6.75	8.45
H2	10.05	8.75	10.45

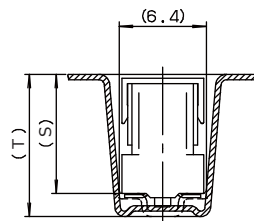


SECT. F-F

Part No.	14	5015	064	10X	861+
----------	----	------	-----	-----	------

丁

- 0: Standard type
- 2: H2 type

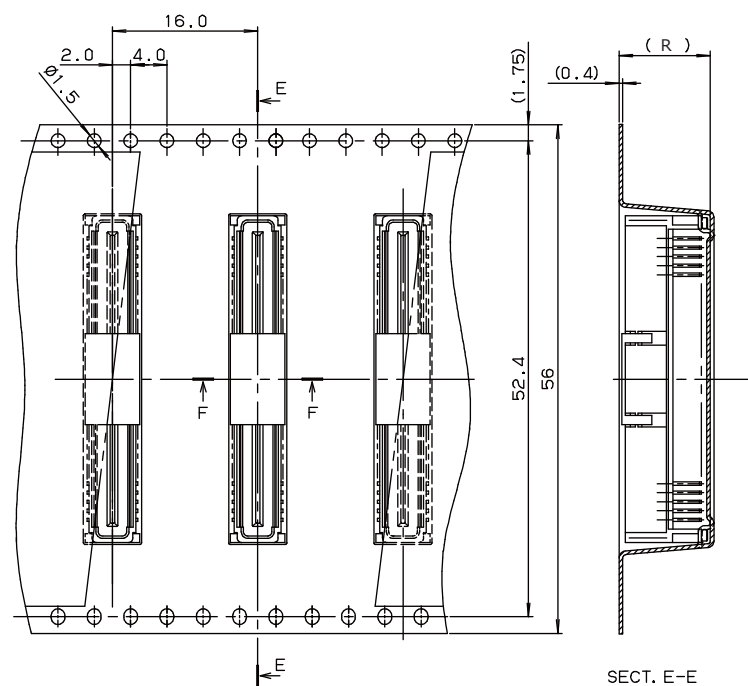

SECT. E-E

梱包数量：250 個／リール
PACKING QUANTITY: 250/Reel

本カタログには推奨めっきを掲載しております。めっき種類・仕様、ならびに生産対応可能極数については営業部にご確認願います。
Recommended plating types are mentioned in this catalogue. For other plating types and their specifications, and available numbers of positions, please feel free to contact our sales department.



1.0mm Pitch 5015 Series




1.0mm ピッチ リセプタクル ストレートタイプ SMT
1.0mm Pitch, Receptacle, Vertical type, SMT

3040-1702-0
0220-1702-0

●Receptacle

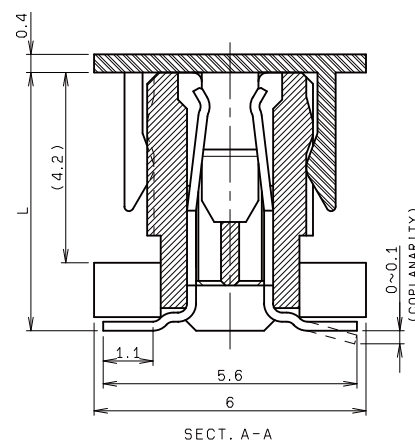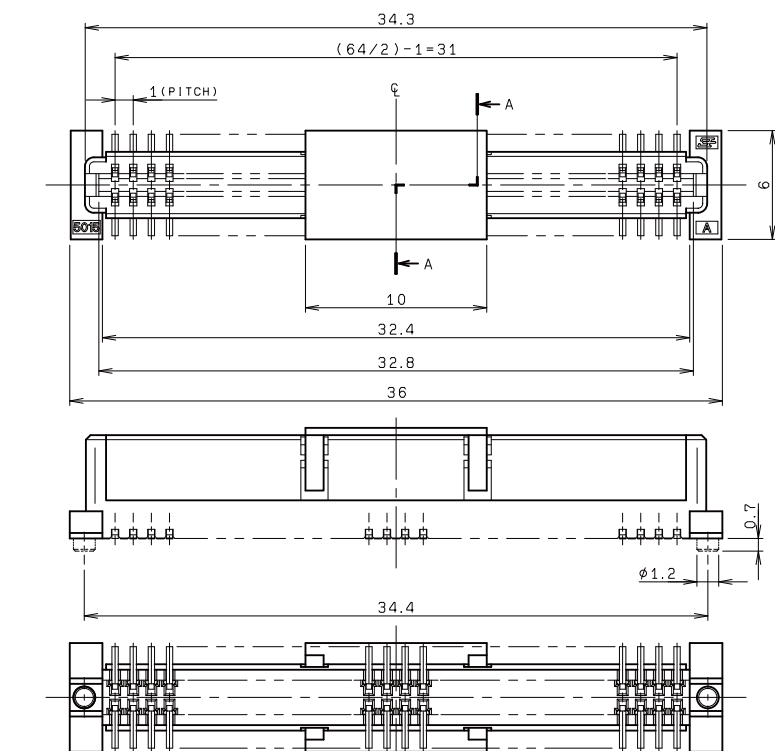


variation	L
Standard	5.60
H5	10.60

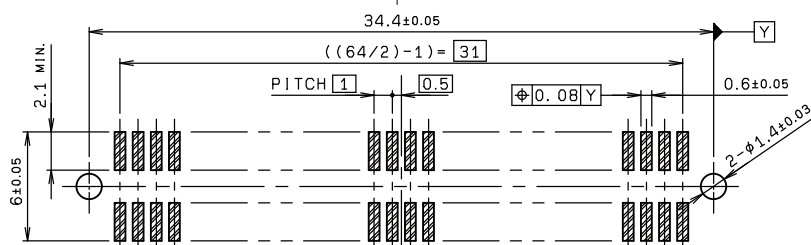


RECOMMENDED PATTERN

●Packaging

Type	R	S	T
Standard	7.4	6.1	7.8
H5	12.4	11.1	12.8



SECT. F-F

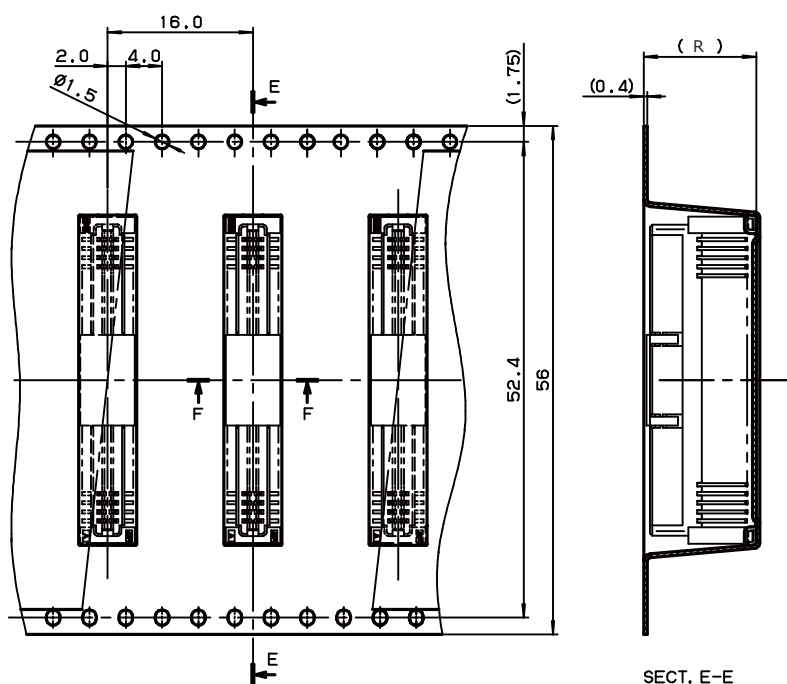

SECT. E-E

注文コード/Ordering Code
Receptacle

Part No. 24 5015 064 10X 861+

極数 No. of Pos.

0: Standard type
5: H5 type

RoHS 対応品
RoHS Compliant Product

梱包数量: 250 個/リール
PACKING QUANTITY: 250/Reel

本カタログには推奨めっきを掲載しております。めっき種類・仕様、ならびに生産対応可能極数については営業部にご確認願います。
Recommended plating types are mentioned in this catalogue. For other plating types and their specifications, and available numbers of positions, please feel free to contact our sales department.