



TOP VIEW

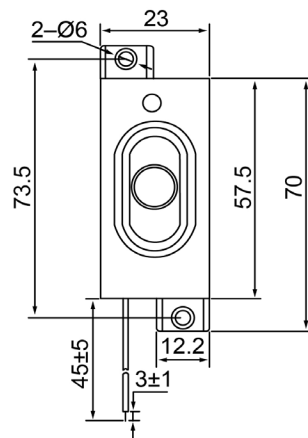

SIDE VIEW

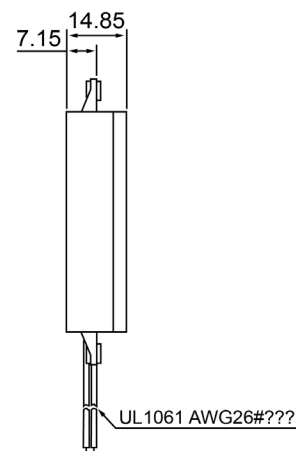

Specifications

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	700	(Hz)
Frequency Range	200 ~ 20,000	(Hz)
SPL @ 10cm	98	(dBA)
Impedance	8	(Ohm)
Cone Material	Cloth	
Nominal Power	2	(W)
Max Power	3	(W)
Mount Type	Flange Mount	
Operating Temperature	- 20 ~ + 60	°C
Storage Temperature	- 30 ~ + 70	°C
Weight	13.7	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



DB UNLIMITED

Revision History

Version	Description			Date	Approved
1	Released from Engineering			12/11/2013	J.S
Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	12/10/2013	C.E.	12/11/2013	J.S	12/11/2013

Dynamic Speaker

SC570708-1