
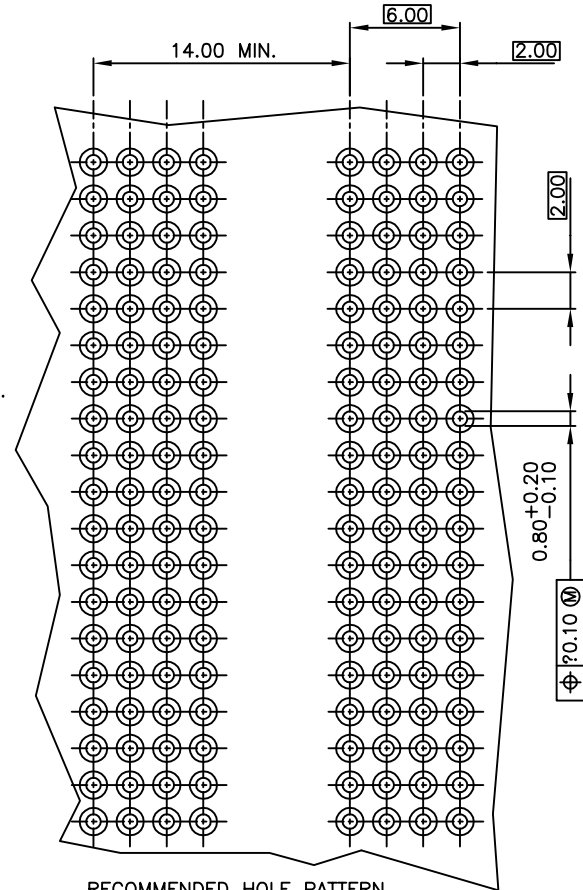
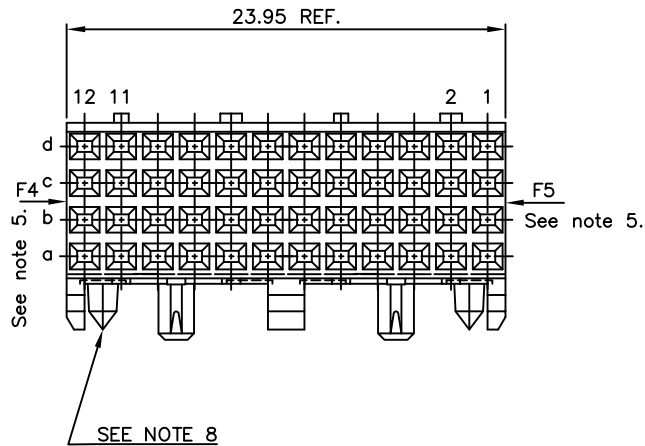


PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

PRODUCT NR.	DIM "A"
88961-X01	5.00 REF.
88961-X11	3.35 REF.
88961-X20	5.76 REF.
88961-X01LF	5.00 REF.
88961-X11LF	3.35 REF.
88961-X20LF	5.76 REF.

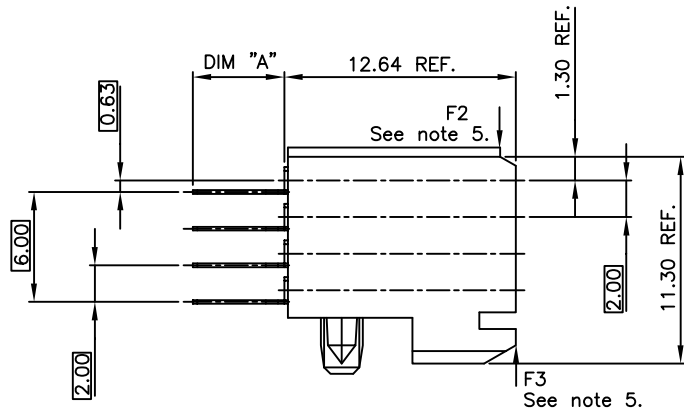

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 $m\mu$ SnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION (E.G. THROUGH
CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 25 NEWTON MAXIMUM PER
CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE
MODULES ON A BOARD, THE USE OF A FIXTURE
IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE
BOTH SIDES OF PRODUCT.
- 9 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
- 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code	tolerances unless otherwise specified	CUSTOMER COPY	FCI ELECTRONICS
ltr ecn no dr date	linear	projection	www.fciconnect.com
H D607-0170 Cenh 25/22/07			
J D608-0171 TER 8/26/08			
K D609-0088 Cenh 06/06/08 angles			
- - - - dr H.Bouwknecht 930219		mm	product family METRAL (tm) code
E H90430 DDB 990722 engr H.Bouwknecht 931122		scale	213
F V91450 DDB 990827 chr J.Wintjes 930219		5:1	sheet
G D605-0485 CLU 051115 app H.Bouwknecht 930219			1 of 1
sheet revision K			
index sheet 1			

PDM: Rev:K

STATUS: Released

Printed: May 19, 2011