
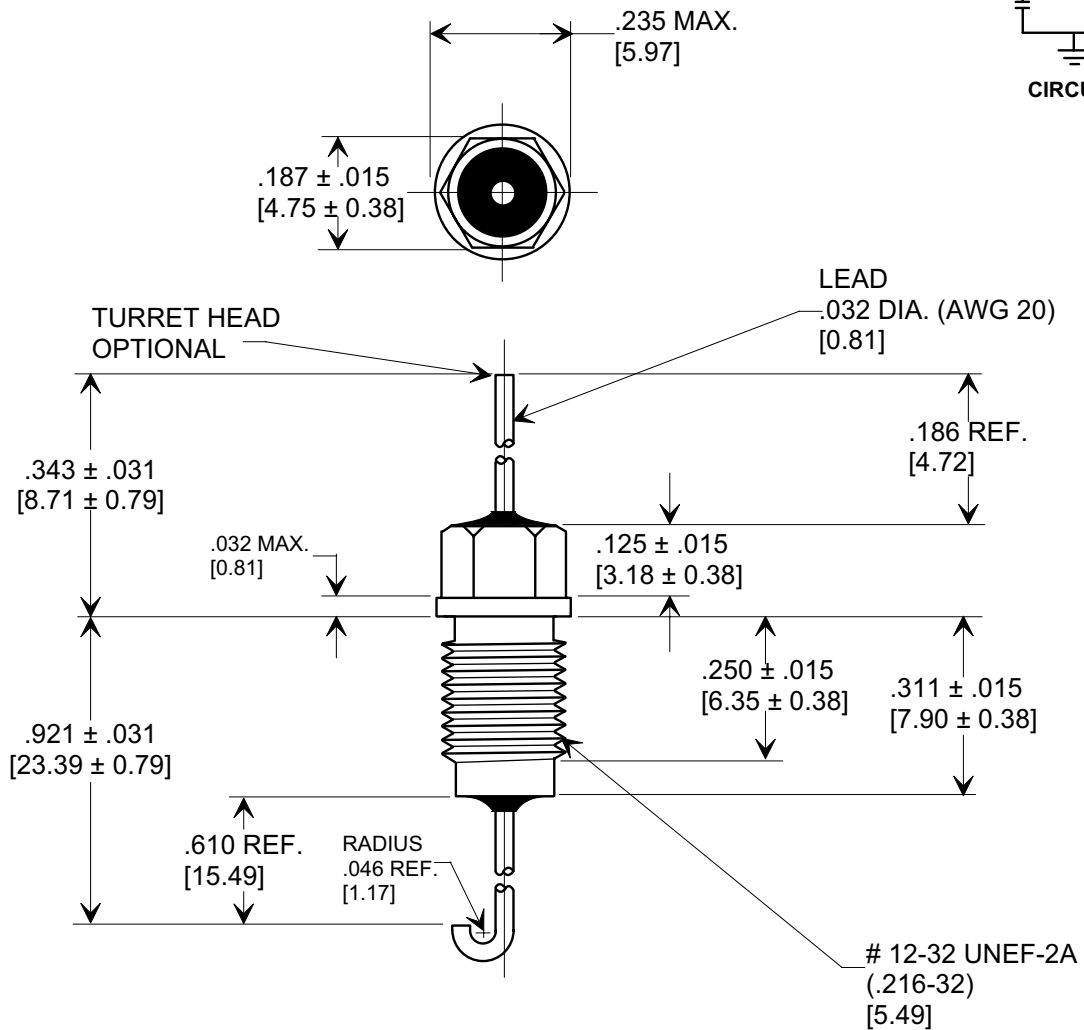



**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.



MIN. CAP.	+ 125 °C WORKING VOLTAGE	I.R. MIN. @ 100 VDC	DWV	CURRENT	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				
					5 MHz	20 MHz	50 MHz	1 GHz	10 GHz
25,000 pF	100 VDC	10 GΩ	250 VDC	10 A	15	60	60	65	65

X-2015 Rev-0	<b>REVISION RECORD</b>				--TOLERANCES-- Unless Otherwise Specified	Title		
	Original Release C.O.	WAS SK 7096-003-S EC. 6-14-93	0	1		<b>EMI FILTER MIL 15733/61-0012</b>		
	930528-2	DWG. REVISED EC. 5-25-94	1	2	Drawn			L.E. 06-03-02
	940217-3	NAILHEAD RMVD. 5-1-96	2	3	Approved	T.C. 06-03-02	<b>A</b> <b>4253-501</b>	
960409-5	RDN TO COMPUTER FORMAT L.E. 06-03-02	3	4	<b>TUSONIX</b> TUCSON, ARIZONA				