

0.5mm Pitch



SERIES

SERIES




6210/6260

0.5mmピッチ RA SMT 下接点 スライドロック

0.5mmPitch RA SMT Bottom contact Slide lock

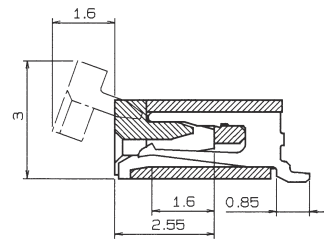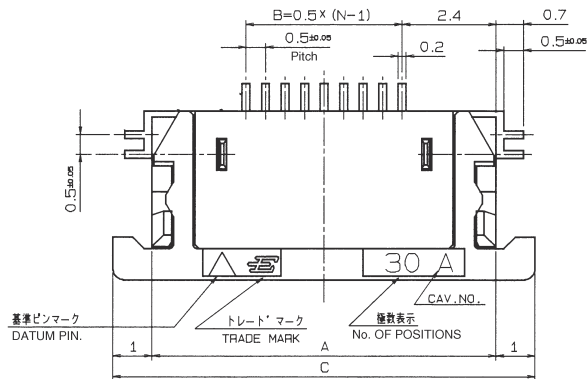

SECT X-X

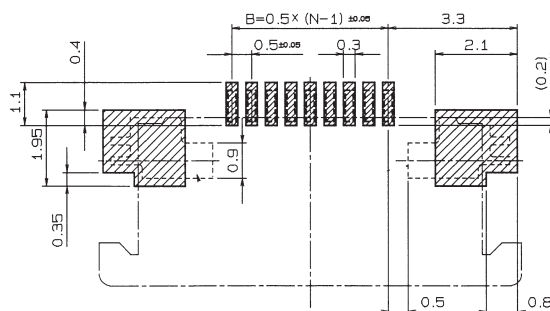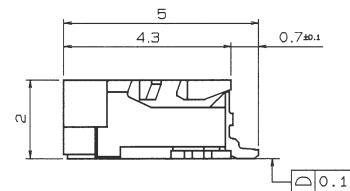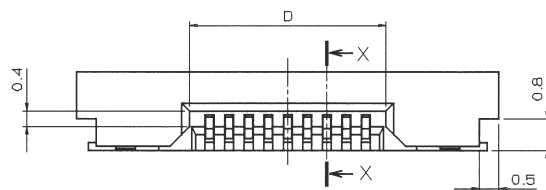

推奨基板取付寸法 (コネクタ搭載側)

	FPC		FFC	
	1	2	1	2
M	0.530.12	0.530.1	0.530.1	0.530.08
P	0.530.02	0.530.06	0.530.03	0.530.05
B	330.03		330.03	330.06
W	W30.07	W30.07	W30.07	W30.07
Wp	0.350.04 0.350.05	0.350.05	0.330.06 0.330.07	0.330.06 0.330.07

Figure 1 illustrates the dimensions of FPC and FFC. The table provides specific measurements for various components (M, P, B, W, Wp) for both FPC and FFC in two columns. The diagram shows a cross-section of a roof with a supporting tape, a 4mm gap, and dimensions M, B, W, and Wp. It also indicates a 2-rod (FPC ONE) and a formula $W = P \times (N + 1)$.

適用FPC, FFC寸法
APPLICABLE FPC, FFC

注文コード ORDERING CODE

08 6210 0XX 340 800A+

・スズ銅めっき Sn-Cu Plated

・極数 NUMBER OF POSITIONS

注文コード ORDERING CODE

08 6260 0XX 340 829+

RoHS 対応品
RoHS Compliant Product

・金めっき Au Plated

・極数 NUMBER OF POSITIONS

極 數 NO.OF POS.	A	B	C	D
5	6.8	2.0	8.8	3.1
6	7.3	2.5	9.3	3.6
7	7.8	3.0	9.8	4.1
8	8.3	3.5	10.3	4.6
9	8.8	4.0	10.8	5.1
10	9.3	4.5	11.3	5.6
11	9.8	5.0	11.8	6.1
12	10.3	5.5	12.3	6.6
13	10.8	6.0	12.8	7.1
14	11.3	6.5	13.3	7.6
15	11.8	7.0	13.8	8.1
16	12.3	7.5	14.3	8.6
17	12.8	8.0	14.8	9.1
18	13.3	8.5	15.3	9.6
19	13.8	9.0	15.8	10.1
20	14.3	9.5	16.3	10.6
21	14.8	10.0	16.8	11.1
22	15.3	10.5	17.3	11.6
23	15.8	11.0	17.8	12.1
24	16.3	11.5	18.3	12.6
25	16.8	12.0	18.8	13.1
26	17.3	12.5	19.3	13.6
27	17.8	13.0	19.8	14.1
28	18.3	13.5	20.3	14.6
29	18.8	14.0	20.8	15.1
30	19.3	14.5	21.3	15.6
33	20.8	16.0	22.8	17.1
34	21.3	16.5	23.3	17.6
36	22.3	17.5	24.3	18.6
40	24.3	19.5	26.3	20.6

生産対応可能極数については、営業部にご確認願います。

Feel free to contact our sales department for available numbers of positions.


0.5mm Pitch

SERIES

6210/6260

エンボス梱包品

Tape and Reel Package

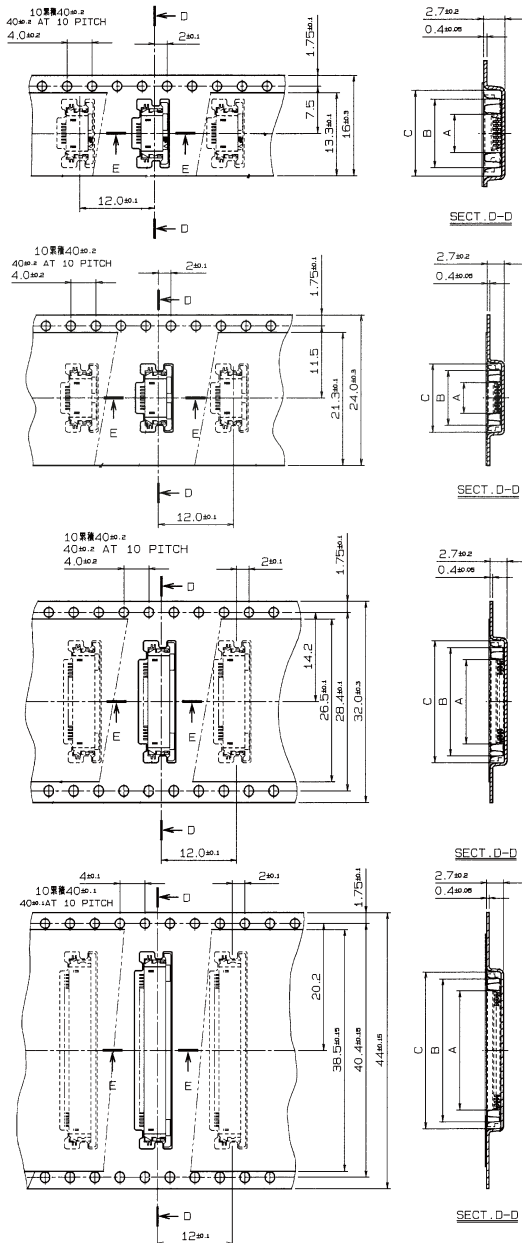


極数 NO.OF POS.	A	B	C
5	3.4	7.2	9.4
6	3.9	7.7	9.9

極数 NO.OF POS.	A	B	C
7	4.4	8.2	10.4
8	4.9	8.7	10.9
9	5.4	9.2	11.4
10	5.9	9.7	11.9
11	6.4	10.2	12.4
12	6.9	10.7	12.9
13	7.4	11.2	13.4
14	7.9	11.7	13.9
15	8.4	12.2	14.4
16	8.9	12.7	14.9
17	9.4	13.2	15.4
18	9.9	13.7	15.9
19	10.4	14.2	16.4
20	10.9	14.7	16.9
21	11.4	15.2	17.4
22	11.9	15.7	17.9
23	12.4	16.2	18.4
24	12.9	16.7	18.9

極数 NO.OF POS.	A	B	C
25	13.4	17.2	19.4
26	13.9	17.7	19.9
27	14.4	18.2	20.4
28	14.9	18.7	20.9
29	15.4	19.2	21.4
30	15.9	19.7	21.9

極数 NO.OF POS.	A	B	C
33	17.4	21.2	23.4
34	17.9	21.7	23.9
35	18.4	22.2	24.4
36	18.9	22.7	24.9
38	19.9	23.7	25.9
40	20.9	24.7	26.9



注文コード ORDERING CODE

08 6210 OXX 340 800A+

RoHS 対応品

RoHS Compliant Product

スズ銅めっき Sn-Cu Plated

極数 NUMBER OF POSITIONS

注文コード ORDERING CODE

08 6260 OXX 340 829+

RoHS 対応品

RoHS Compliant Product

金めっき Au Plated

極数 NUMBER OF POSITIONS

生産対応可能極数については、営業部にご確認願います。

Feel free to contact our sales department for available numbers of positions.

梱包数量 2000個/リール

PACKING QUANTITY : 2000/Reel